

## HW Series – 22mm IEC Style Global Pushbuttons

## Key features include:

- Locking lever removable contact blocks
- Finger-safe IP20 contacts as standard, other terminal styles available
- Tamperproof construction
- All E-stops meet EN418 and are compliant with SEMI S2 standards
- Worldwide approvals
- Easy to assemble
- Choice of black plastic or metallic front bezels
- Incandescent or LED illumination
- Transformer or full voltage
- Slow make double break self cleaning contacts



## HW: The Best Engineered Switch in the World

IDEC's HW switches are "The best engineered switch in the world" for a reason. Carrying the CE mark, UL, CSA, CCC (Chinese), and TUV approvals, these switches are designed for use in almost any part of the world.

Complete with finger-safe contact blocks offering IP20 protection, these 7/8" (22mm) switches include illuminated and non-illuminated pushbuttons, pilot

lights, selector switches, and emergency stop switches.

All switches also incorporate mechanically keyed safety locking levers, ensuring correct installation and maintaining safety in high-vibration applications.



File No. E68961



File No. LR92374



Registration No. R9551089 (E-stops)  
Registration No. R50054316 (Dual Pushbuttons)  
Registration No. J9650511 (Pilot Lights)  
Registration No. J9551458 (all other switches)



TÜV Rheinland  
Certificate No.  
2005010305145656






Specifications	
Electrical	Rated Operational Characteristics AC-15: A600 or Ue = 250V, Ie = 3A (NO, NC, NO-EM, NC-LB) DC-13: P600 or Ue = 125V, Ie = 1.1A (NO, NC) DC-13: Q600 or Ue = 125V, Ie = 0.9A (NO-EM, NC-LB)
	Maximum Inrush Current 40 A (40 ms)
	Rated Insulation Voltage 600V
	Rated Switching Over-Voltage Less than 4kV, conforming to IEC60947-1
	Rated Impulse Withstanding Voltage 4kV for contact circuit, 2.5kV for lamp circuit
	Rated Thermal Current 10 Amp
	Minimum Switching Capacity 5 mA at 3V AC/DC
	Electrical Reliability MTBF < 1 fault for 10 million operation cycles (3V DC, 5mA)
	Lamp Ratings Incandescent: 1 W LEDs: 6V/17mA max, 12V & 24V/11mA max, 120 & 240V/10mA max
	Contact Operation Slow break NC or NO, self-cleaning
Mechanical	Positive Action Operation (Emergency Stops with NC contacts) 5.5mm to 10mm travel to latch, 45N minimum force to latch 10mm maximum travel, 1,800 operations per hour maximum for a Pushlock Turn Reset 900 operations per hour maximum for a Push-Pull
	Operating Force Flush and extended pushbuttons—with 1NO or 1NC contact: 6.2±2N (momentary), 7.0±2N (maintained) Additional contacts—1NO or 1NC: +3.2N (momentary), + 3.3N (maintained)
	Recommended Terminal Torque 0.8 N m (7.1 in lb.)
	Applicable Wire Size Minimum 1 x 22 AWG, max. 2 x 14 AWG or 1 x 12 AWG
	Contact Resistance Initial contact resistance of 50mΩ or less
	Contact Gap 4mm (NO and NC), 2mm (NO-EM and NC-LB)
	Horsepower Rating Reference Value: 1/4 HP @ 120V (1Ø non-reversing), 1HP @ 240V (3Ø non-reversing)
	Contact Material Silver (gold plated contacts available - contact IDEC)
	Operating Temperature Operation: -25 to +50°C (without freezing), Storage: -40 to +70°C (without freezing)
	Vibration Resistance 10 to 55Hz, 98m/sec <sup>2</sup> (10G) conforming to IEC6068-2-6
	Shock Resistance 980m/sec <sup>2</sup> (100G) conforming to IEC6068-2-7
	Mechanical Life Momentary pushbuttons: 5,000,000 (900 operations per hour), All other switches: 500,000

Standards & Approvals	Conforming to Standards		EN60947-1, EN60947-5-1, VDE0660-200, UL508, CSA C22-2 No.14							
	Approvals		 File No. E68961  File No. LR92374    TÜV Rheinland Certificate No. 2005010305145656							
Degree of Protection (conforming to IEC60529) (conforming to NEMA ICS6-110)			IP65 (from front of the panel) IP20 (Type HW-F contact block) NEMA 1, 2, 3, 3R, 3S, 4, 4X, 5, 12, 13 (from front of panel)							
Pollution Degree (conforming to IEC60947-1)			3 for switches not using a transformer, 2 for switches using a transformer							
External Short-Circuit Protection			10A 250V fuse conforming to IEC60269-1							
Terminal Referencing			Conforming to CENELEC EN50005							
Contact Ratings	Pushbuttons		Contact Block		Type HW-C/HW-F /HW-G					
	Illuminated Pushbuttons		Rated Insulation Voltage		600V					
	Selector Switches		Rated Continuous Current		10A					
	Illuminated Selector Switches		Contact Ratings by Utilization Category IEC 60947-5-1		AC-15 (A600)					
	Pushbutton Selectors				DC-13 (P600)					
Characteristics	Operational Voltage			24V	48V	50V	110V	220V	440V	
	Operational Current	AC 50/60 Hz		10A	—	10A	10A	6A	2A	
		AC-12 Control of resistive loads & solid state loads		10A	—	7A	5A	3A	1A	
	DC	DC-12 Control of resistive loads & solid state loads		8A	5A	—	2.2A	1.1A	—	
		DC-13 Control of electromagnets		5A	2A	—	1.1A	0.6A	—	

For dimensions, see page 551.



## LED Lamp Ratings (LSTD Type)

Model No.		LSTD-6②	LSTD-1②	LSTD-2②	LSTD-H2②	LSTD-M4②		
Lamp Base		BA9S/13						
Rated Voltage		6V AC/DC	12V AC/DC	24V AC/DC	120V AC	240V AC		
Voltage Range		6V AC/DC ±10%	12V AC/DC ±10%	24V AC/DC ±10%	120V AC ±5%	240V AC ±5%		
Current Draw	AC	A, R, W: G, S: 8mA	17mA	11mA	11mA	10mA		
	DC	A, R, W: G, S: 5.5mA	14mA	10mA	10mA	—		
Color Code		A (amber), G (green), R (red), S (blue), W (white)						
Lamp Base Color		Same as illumination color						
Voltage Marking		Die stamped on the base						
Life (reference value)		Approx. 50,000 hours (The luminance reduces to 50% the initial intensity when used on complete DC.)						
Internal Circuit	A, R, W		A, R, W					
								
	G, S							
							 In place of ②, specify the Lens/LED Color Code.	

## Mono Lever Switches 2-Position (Assembled)



## 2-Position Mono Lever Switches

Description	Part Number	Description
HW1M Standard Lever	HW1M-F1010-20	Maintained up and down
	HW1M-F2020-20	Spring return up and down
	HW1M-F1010-40	Maintained up and down
	HW1M-F2020-40	Spring return up and down
	HW1M-F0101-20	Maintained right and left
	HW1M-F0202-20	Spring return right and left
	HW1M-F0101-40	Maintained right and left
	HW1M-F0202-40	Spring return right and left
	HW1M-LF1010-20	Maintained up and down
HW1M-L Interlocking Lever	HW1M-LF2020-20	Spring return up and down
	HW1M-LF1010-40	Maintained up and down
	HW1M-LF2020-40	Spring return up and down
	HW1M-LF0101-20	Maintained right and left
	HW1M-LF0202-20	Spring return right and left
	HW1M-LF0101-40	Maintained right and left
	HW1M-LF0202-40	Spring return right and left



1. All assembled part numbers in catalog include standard (HW-F...) contacts.
2. Assembled units with spring-up terminals (HW-G...) can be ordered by removing an "F" from the part number (Ex. HW1B-M1F11-R becomes HW1B-M111-R).
3. Units with exposed screw terminals (HW-C...) must be ordered as sub-components.
4. Additional contact configurations available (up to 6 total contacts).

## Circuit Diagrams

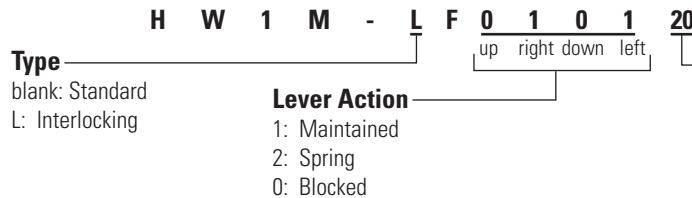
## 2 Position Left/Right

Circuit Number	Contact Mounting		Position		
	No.		Left	Center	Right
20	1	HW-F10	X	0	0
	2	HW-F10	0	0	X
40	1	HW-F10	X	0	0
	2	HW-F10	0	0	X
	3	HW-F10	X	0	0
	4	HW-F10	0	0	X

## 2 Position Up/Down

Circuit Number	Contact Mounting		Position		
	No.		Down	Center	Up
20	1	HW-F10	X	0	0
	2	HW-F10	0	0	X
40	1	HW-F10	X	0	0
	2	HW-F10	0	0	X
	3	HW-F10	X	0	0
	4	HW-F10	0	0	X

## Part Number Structure



## Mono Lever Switches 2-Position (Sub-assembled) Part Numbers

Contact Assembly	+	Adaptor & Safety Lever Lock	+	Anti-Rotation Ring	+	Operator	=	Completed Unit
------------------	---	-----------------------------	---	--------------------	---	----------	---	----------------



## Contact Blocks

Style	Contacts	1NO	1NC
	Standard Fingersafe (IP20)	HW-F10	HW-F01
		HW-F10R (early make)	HW-F01R (late break)
	Spring-Up Terminal	HW-G10	HW-G01
		HW-G10R (early make)	HW-G01R (late break)
	Exposed Screw Terminal	HW-C10	HW-C01
		HW-C10R (early make)	HW-C01R (late break)
	Dummy Block	TW-DB	

## Anti-Rotation Ring

Appearance	Part Number
	HW9Z-RL

Use with notched panel cutout to prevent unit rotation.

## Operators

Appearance	Description	Part Number
	Maintained Up/Down	HW1M-1010
	Spring return Up/Down	HW1M-2020
	Maintained Left/Right	HW1M-0101
	Spring return Left/Right	HW1M-0202
	Maintained Up/Down	HW1M-L1010
	Spring return Up/Down	HW1M-L2020
	Maintained Left/Right	HW1M-L0101
	Spring return Left/Right	HW1M-L0202

## Contact Block Mounting Adaptor

Style	Part Number
	HW-CB2C



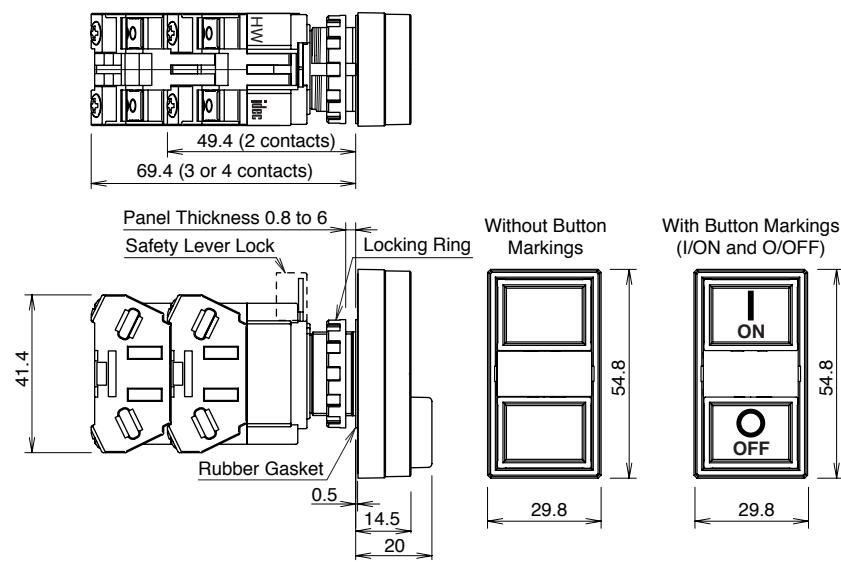
- Used to mount contact blocks to operator (first pair only).
- IDEK strongly recommends using the safety lever lock (included) to prevent heavy vibration or maintenance personnel from inadvertently unlocking contacts.

## Replacement Parts

Item	Part Number
Black Cap	HW9Z-CPM
Boot	HW9Z-BLM (fits standard operator only)

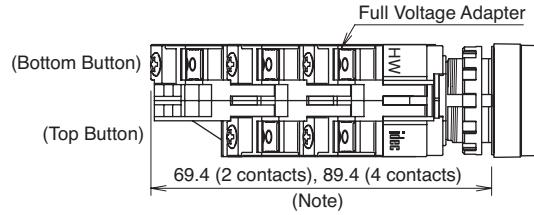
**Dual Pushbutton**

## Without Pilot Light

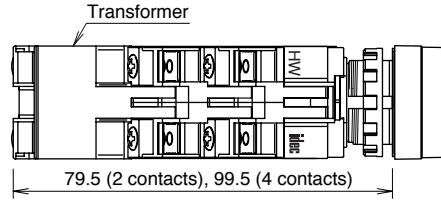


## With Pilot Light

## Full Voltage



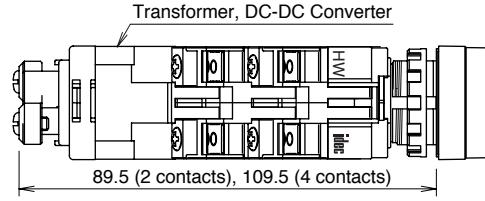
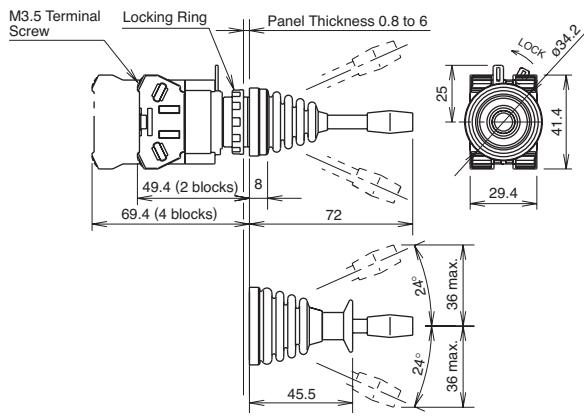
## Transformer (240V minimum)



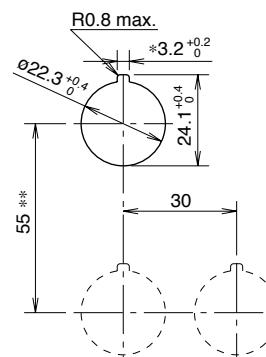
The depth of a 3-contact model depends on the combination of contact blocks at top and bottom pushbuttons.

<b>Top Button</b>	1 contact block	2 contact blocks
<b>Bottom Button</b>	2 contact blocks	1 contact block
<b>Depth</b>	89.4 mm	69.4 mm

## Transformer (480V)

**Monolever**

Dimensions (mm)

**Mounting Hole Layout**

-The 3.2 mm recess is for preventing rotation and is not necessary when a nameplate or anti-rotation ring is not used.

-When using the safety lever lock, determine the vertical spacing in consideration of convenience for installing and removing the safety lever lock.

-Recommended vertical spacing: 100 mm

-The minimum mounting centers are applicable to switches with one layer of contact blocks (two contact blocks). When two layers of contact blocks are mounted, determine the minimum mounting centers for ease of wiring.