
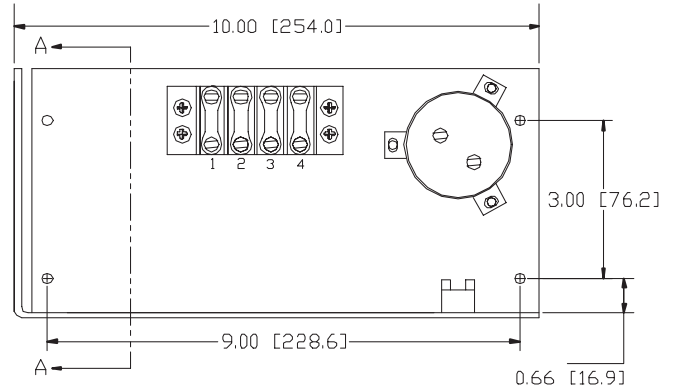


Open Frame Linear Unregulated DC Power Supplies

Power Supplies:

- Linear Unregulated
- AC Input, DC output
- Screw Terminal Access
- Toroid Transformer for lower EMI

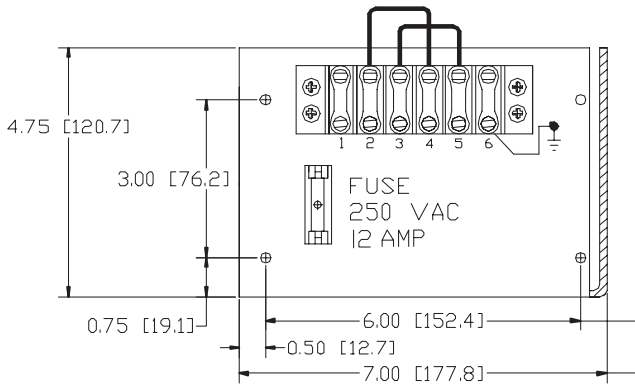

All sizes are given in inches, sizes in brackets are in mm

Part Number	Input Voltage and Frequency	No Load Output Voltage	Full Load Output		Nominal Wattage	Shunt	Weight(Nom.)
			Voltage	Current			
PS42V20AF110	120VAC 50/60Hz	44VDC	35VDC	20 Amps	680 W		16.5 lbs (7.5kg)
PS42V20AF220	240VAC 50/60Hz	44VDC	35VDC	20 Amps	680 W		16.5 lbs (7.5kg)
PS42V20AF110-S1	120VAC 50/60Hz	44VDC	35VDC	20 Amps	680 W	100 W	17 lbs (7.7kg)
PS42V20AF220-S1	240VAC 50/60Hz	44VDC	35VDC	20 Amps	680 W	100 W	17 lbs (7.7kg)
PS42V20AF110-S2	120VAC 50/60Hz	44VDC	35VDC	20 Amps	680 W	200 W	17 lbs (7.7kg)
PS42V20AF220-S2	240VAC 50/60Hz	44VDC	35VDC	20 Amps	680 W	200 W	17 lbs (7.7kg)

Warning: Improper Power Supply Sizing may result in Motor Position Error Faults, Motor Resets, and Machine Faults



Animatics Corporation • All integrated motor products made by Animatics are covered by patent number 5,912,541
tel: 408.748.8721 • fax: 408.748.8725 • www.animatics.com