


## SSM Corner Mirrors

- Robust for heavy-duty applications
- Extra wide for use with long-range optical safety systems
- Available in stainless steel for harsh applications
- Available in 20 lengths
- Rated 85% efficiency for SSM models and 50% on SSM-S models
- Decreases range by 8% for SSM models and 30% for SSM-S models

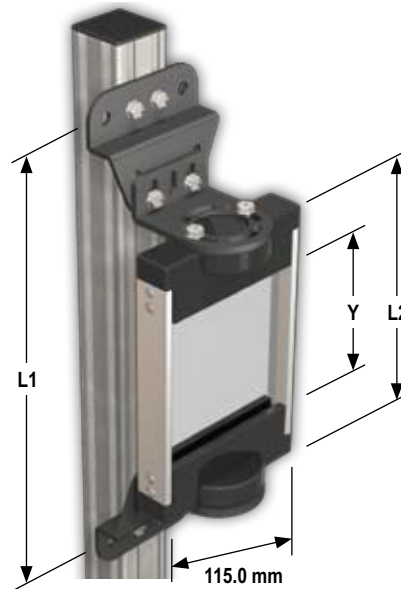

**SSM and SSM-S Corner Mirrors**  
 (shown with standard brackets and EZA-MBK-2\*\*  
 adapter bracket mounted on MSA stand)

## SSM Glass Corner Mirrors

Reflective Area (Y)	Mounting Height (L1)*	Mirror Height (L2)	Model	
			Aluminum	Stainless Steel
100 mm	211 mm	178 mm	SSM-100	SSM-100-S
150 mm	261 mm	228 mm	SSM-150	SSM-150-S
200 mm	311 mm	278 mm	SSM-200	SSM-200-S
250 mm	361 mm	328 mm	SSM-250	SSM-250-S
375 mm	486 mm	453 mm	SSM-375	SSM-375-S
475 mm	586 mm	553 mm	SSM-475	SSM-475-S
550 mm	661 mm	628 mm	SSM-550	SSM-550-S
675 mm	786 mm	753 mm	SSM-675	SSM-675-S
825 mm	936 mm	903 mm	SSM-825	SSM-825-S
875 mm	986 mm	953 mm	SSM-875	SSM-875-S
975 mm	1086 mm	1053 mm	SSM-975	SSM-975-S
1100 mm	1211 mm	1178 mm	SSM-1100	SSM-1100-S
1175 mm	1286 mm	1253 mm	SSM-1175	SSM-1175-S
1275 mm	1386 mm	1353 mm	SSM-1275	SSM-1275-S
1400 mm	1511 mm	1478 mm	SSM-1400	SSM-1400-S
1475 mm	1586 mm	1553 mm	SSM-1475	SSM-1475-S
1550 mm	1661 mm	1628 mm	SSM-1550	SSM-1550-S
1675 mm	1786 mm	1753 mm	SSM-1675	SSM-1675-S
1750 mm	1861 mm	1828 mm	SSM-1750	SSM-1750-S
1900 mm	2011 mm	1978 mm	SSM-1900	SSM-1900-S

\* The mounting brackets may be inverted from the positions shown (flanges pointing "inward" instead of "outward," as shown). When this is done, dimension L1 decreases by 58 mm.

\*\* One EZA-MBK-2 adapter bracket kit required if used with a MSA stand.

NOTE: The total range decreases by approximately 8% per mirror.