



Electronic safety sensors

CSS 180

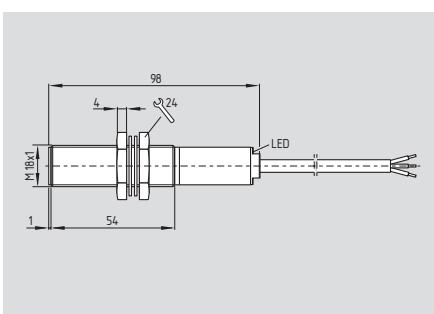

- Connecting cable or connecting cable and connector
- Thermoplastic enclosure
- Electronic, non-contact, coded system
- Large switching distance
- Misaligned actuation possible
- High repeat accuracy of the switching points
- Self-monitored series-wiring of max. 16 sensors
- Max. length of the sensor chain 200 m
- Comfortable diagnose through sensor LED and diagnostic output
- Early warning when operating near the limit of the sensor's hysteresis range
- 2 short-circuit proof, p-type safety outputs (24 VDC per 500 mA)
- EX version available

CSS 180 ST

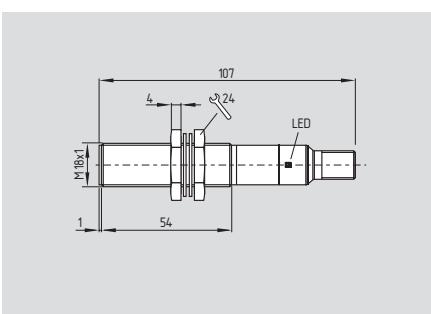

- Integrated connector
- Multifunction device
- Available: **CSS 8-180-2P+D-M-ST**

Technical data

Standards: IEC 60947-5-3, EN ISO 13849-1, IEC 61508

Enclosure: glass fiber reinforced thermoplastic

Mode of operation: inductive

Actuator: CST 180-1, CST 180-2

Series-wiring: max. 16 components

Connection: cable or

cable with connector M12

or integrated connector M12

Cable section: according to execution:

4 x 0.5 mm², 5 x 0.34 mm², 7 x 0.25 mm²

Switching distances to IEC 60947-5-3:

Rated switching distance S_n : 8 mm

Assured switch-on distance S_{ao} : 7 mm

Assured switch-off distance S_{ar} : 10 mm

Hysteresis: ≤ 0.7 mm

Repeat accuracy: ≤ 0.2 mm

Cable length: max. 200 m

(Cable length and cable section alter the voltage drop depending on the output current)

Ambient conditions:

Ambient temperature T_u :

- For max. output current

≤ 500 mA / output $-25^{\circ}\text{C} \dots +55^{\circ}\text{C}$

≤ 200 mA / output $-25^{\circ}\text{C} \dots +65^{\circ}\text{C}$

≤ 100 mA / output $-25^{\circ}\text{C} \dots +70^{\circ}\text{C}$

Storage and transport

temperature: $-25^{\circ}\text{C} \dots +85^{\circ}\text{C}$

Protection class: IP65, IP67 to EN 60529

Resistance to vibration: 10...55 Hz, amplitude 1 mm

Resistance to shock: 30 g / 11 ms

Switching frequency f : 3 Hz

Response time: < 30 ms

Duration of risk: ≤ 30 ms

Electrical data:

Rated operating voltage U_e : 24 VDC

-15% / +10%

(stabilised PELV)

Rated operating current I_e : 1 A

Minimum operating current I_m : 0.5 mA

Required rated

short-circuit current: 100 A

Rated insulation voltage U_i : 32 V

Rated impulse withstand

voltage U_{imp} : 800 V

No-load current I_0 : 0.05 A

Approvals




Ordering details

CSS 8-180-①-②-③

No. | Option | Description

①	2P 2P+D	2 p-type safety outputs 2 p-type safety outputs and 1 p-type signal contact (diagnostic)
②	E Y M L LST ST	End or single device Device for series-wiring Multifunction device Connecting cable Connecting cable and connector Integrated connector
③		

Note

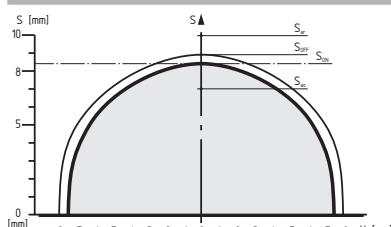

Legend

S_{on}	Switch-on distance
S_{off}	Switch-off distance
S_{ao}	Assured switch-on distance
S_{ar}	Assured switch-off distance

Note

More detailed product information can be found in the Electronic Safety Sensors and Solenoid Interlocks catalog.

Sensor and actuator must be ordered separately!

Electronic safety sensors

Technical data

Leakage current I_r :	$\leq 0.5 \text{ mA}$
Protection class:	II
Oversupply category:	III
Degree of pollution:	3
Safety inputs X1/X2:	
Rated operating voltage U_e :	24 VDC -15% / +10%
PELV gem. IEC 60204-1	
Rated operating current I_e :	1 A
Safety outputs Y1/Y2:	p-type, short-circuit proof
Rated operating current I_{e1} :	max. 0.5 A, ambient temperature-dependent
Utilization category:	DC-12 U_e/I_e 24 VDC/0.5 A DC-13 U_e/I_e 24 VDC/0.5 A
Voltage drop:	0.5 V
Diagnostic output:	p-type, short-circuit proof
Rated operating voltage U_{e2} :	min. U_e - 4 V
Rated operating current I_{e2} :	max. 0.05 A
Utilization category:	DC-12 U_e/I_e 24 VDC/0.05 A DC-13 U_e/I_e 24 VDC/0.05 A
External short-circuit protection:	fuse
- for output current $\leq 200 \text{ mA}$:	1.0 A
- for output current $> 200 \text{ mA}$:	1.6 A
Classification:	
Standards:	EN ISO 13849-1, IEC 61508
PL:	e
Category:	4
PFH value:	$2.5 \times 10^{-9} \text{ h}$
SIL:	suitable for SIL 3 applications
Mission time:	20 years

Connection

End or single device: CSS-8-180-2P+...-E-L...

Connecting cable (2 m): Cable section 4-pole: 4 x 0.5 mm ² 5-pole: 5 x 0.35 mm ²		Connecting cable (2 m) with connector male: M12, 4-pole M12, 5-pole	
Color of the connecting cable	Wiring		Pin configuration
BN (brown)	A1 U_e		Pin 1
BU (blue)	A2 GND		Pin 3
BK (black)	Y1 Safety output 1		Pin 4
WH (white)	Y2 Safety output 2		Pin 2
GY (grey)	Only 5-pole version: diagnostic output (option)		Pin 5

Series-wiring device: CSS-8-180-2P-Y-L...

Inputs (IN): (0.25 m) grey cable 4-pole, 4 x 0.5 mm ²		Inputs (IN): (0.25 m) Connecting cable with connector female M12, 4-pole	
Outputs (OUT): (2 m) black cable 4-pole, 4 x 0.5 mm ²		Outputs (OUT): (2 m) Connecting cable with connector male M12, 4-pole	
Color of the connecting cable	Wiring grey cable (IN)	black cable (OUT)	Pin configuration
BN (brown)	A1 U_e	A1 U_e	Pin 1
BU (blue)	A2 GND	A2 GND	Pin 3
BK (black)	X1 Safety input 1	Y1 Safety output 1	Pin 4
WH (white)	X2 Safety input 2	Y2 Safety output 2	Pin 2

Multifunctional Device: CSS-8-180-2P+D-M...

Connecting cable (2 m) Cable section 7-pole: 7 x 0.25 mm ²		Connecting cable (2 m) with connector male M12, 8-pole or integrated connector male M12, 8-pole	
Color of the connecting cable	Wiring		Pin configuration
BN (brown)	A1 U_e		Pin 1
BU (blue)	A2 GND		Pin 3
VT (violet)	X1 Safety input 1		Pin 6
WH (white)	X2 Safety input 2		Pin 2
BK (black)	Y1 Safety output 1		Pin 4
RD (red)	Y2 Safety output 2		Pin 7
GY (grey)	Diagnostic output		Pin 5
-	Spare		Pin 8

Ordering details

Requirements for the safety controller

Dual-channel p-type safety input. The internal function tests of the sensors cause the outputs to cyclically switch off for max. 2 ms, this must be tolerated by the safety controller.

Additional Accessories:

Series-wiring accessories	Page 1-92
Connector	Page 1-89
Diagnostic tables	Online
Suitable safety monitoring modules	Page 5-2





Note

- Series-wiring of sensors:
A chain of 16 self-monitored CSS 180 safety sensors can be wired in series without loss of PL e and category 4 to EN ISO 13849-1. In this configuration, the redundant output of the first sensor is wired into the input of the next sensor.
- The voltage drop over a long sensor chain should be taken into account when planning cable routing. It depends on several factors, which are operating voltage, cable length and section, ambient temperature, number of series-wired sensors and the input load of the safety controller.



Electronic safety sensors

System components

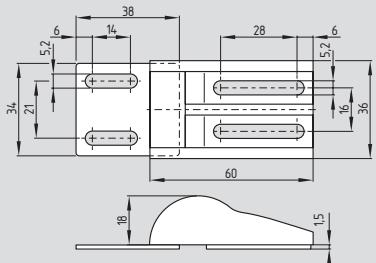

Ordering details

Actuator	CST 180-1
Actuator	CST 180-2
Terminal mounting	H 18
Magnetic ball catch	CSA-M-1

Sensor and actuator must be ordered separately!