

Datasheet - CSS 12-34-V-D-M-L

Safety sensors / CSS 34

☒ Preferred typ



- Thermoplastic enclosure
- Electronic contact-free, coded system
- Misaligned actuation possible
- 27 mm x 108.2 mm x 35 mm
- High repeat accuracy of the switching points
- Max. length of the sensor chain 200 m
- 2 short-circuit proof PNP safety outputs
- Integral cross-short, wire-breakage and external voltage monitoring of the safety cables up to the control cabinet
- 1 x Pre-wired cable 8-pole
- Actuation from top
- Max. 31 sensors can be wired in series.


(Minor differences between the printed image and the original product may exist!)

Ordering details

Product type description	CSS 12-34-V-D-M-L
Article number	101181060
EAN Code	4030661314839
eCl@ss	27-27-24-01

Approval

Approval



Classification

Standards	EN ISO 13849-1, IEC 61508, IEC 60947-5-3
PL	bis e
Control category	bis 4
PFH	3.6 x 10 ⁻⁹ /h
SIL	3 bis
Mission time	20 Years
Classification	PDF-M

Global Properties

Permanent light	CSS 34
Standards	IEC 60947-5-3
Compliance with the Directives (Y/N)	Yes

Suitable for safety functions (Y/N)	Yes
Function	Sensor for series wiring
Series-wiring	up to 31 components
Length of the sensor chain	max. 200 m
Active principle	inductive
Materials	
- Material of the active surface	Plastic, glass-fibre reinforced thermoplastic
- Material of the housings	Plastic, glass-fibre reinforced thermoplastic
Housing construction form	Block
Cable colour	Black
Cable type	LiYY
Weight	300
Input for enabling pushbutton, suitable for automatic start (Y/N)	No
Input for reset pushbutton, with edge monitoring (Y/N)	No
Diagnostic output (Y/N)	Yes
Reaction time	< 30
Duration of risk	< 60
Cascadable (Y/N)	Yes
Recommended actuator	CST 34-V-1, CST 34-S-2, CST 34-S-3, CST 180-1, CST 180-2

Mechanical data

Design of electrical connection	Cable (Y-UL 2517), 8-pole
Cable length	2
Cable section	
- Min. Cable section	
- Max. Cable section	8 x 0,35
AWG-Number	22
mechanical installation conditions	not flush
Actuating planes	Actuation from top
Active area	front
Switch distance S _n	10 mm / 12 mm / 15 mm
- Actuator CST 34-V-1	12
- Actuator CST 34-S-2	10
- Actuator CST 34-S-3	15
- Actuator CST 180-1 / CST 180-2	12
Ensured switch distance ON S _{ao}	8 mm / 10 mm / 13 mm
- Actuator CST 34-V-1	10
- Actuator CST 34-S-2	8
- Actuator CST 34-S-3	13
- Actuator CST 180-1 / CST 180-2	10
Ensured switch distance OFF S _{ar}	15 mm / 16 mm / 18 mm
- Actuator CST 34-V-1	15
- Actuator CST 34-S-2	16
- Actuator CST 34-S-3	18
- Actuator CST 180-1 / CST 180-2	16
hysteresis	max. 1.5 mm
Repeat accuracy R _R	≤ 0,5 mm
notice	Axial offset: The front face allows for an axial misalignment (z) of max. ± 8 mm. see drawing: Operating principle
restistance to shock	30 g / 11 ms
Resistance to vibration	10 ... 55 HZ, Amplitude 1 mm

Ambient conditions

Ambient temperature	
- Min. environmental temperature	-25
- Max. environmental temperature	+70
Storage and transport temperature	
- Min. Storage and transport temperature	-25
- Max. Storage and transport temperature	+85
Protection class	IP65, IP67 to IEC/EN 60529
Protection rating	II
Air clearances and creepage distances To IEC/EN 60664-1	
- Rated impulse withstand voltage U_{imp}	0,8 kV
- Overvoltage category	III
- Degree of pollution	3

Electromagnetic compatibility (EMC)

EMC rating	to IEC 61000-6-2
Interfering radiation	to IEC 61000-6-4

Electrical data

Cross circuit/short circuit recognition possible (Y/N)	Yes
Voltage type	DC
Switch frequency	3
Rated insulation voltage U_i	32 VDC
Rated operating voltage U_e (stabilised PELV)	
Operating current I_e	0,6 A
No-load current I_0	0,1 A
Required rated short-circuit current	100 A
Device insulation (Circuit breaker)	
- Ambient temperature: up 45 °C	4 A
- Ambient temperature: up 60 °C	3.15 A
- Ambient temperature: 65 °C	2.5 A
- Ambient temperature: 70 °C	2 A
notice	The cable section of the interconnecting cable must be observed for both wiring variants! Cable length and cable section alter the voltage drop depending on the output current

Electrical data - Safety inputs

Safety inputs	X1 and X2
---------------	-----------

Electrical data - Safety outputs

Safety outputs	Y1 and Y2
Fuse rating	short-circuit proof
Design of control output	p-type
Number of secure semi-conductor outputs	2
Max. output current at secured output	0,25 A
Rated operating voltage	min. ($U_e - 1$ V)
Residual current I_r	$\leq 0,5$ mA
Operating current I_e	max. 0,25 A
- Ambient temperature: -25 °C ... +70 °C	$\leq 0,1$ A
Minimum operating current I_m	0,5 mA

- Ambient temperature: -25 °C ... +65 °C	≤ 0,25 A
Utilisation category	DC-12: 24 V / 0,25 A DC-13: 24 V / 0,25 A
Voltage drop U _d	< 1 V

Electrical data - Diagnostic output

Serial diagnostics (Y/N)	No
Fuse rating	short-circuit proof
Design of control output	p-type
Number of semi-conductor outputs with signaling function	1
Rated operating voltage	min. (U _e – 5 V)
Operating current I _e	max. 0,05 A
Voltage drop U _d	< 5 V
Utilisation category	DC-12: 24 V / 0,05 A DC-13: 24 V / 0,05 A

LED switching conditions display

LED switching conditions display (Y/N)	Yes
Number of LED's	3

ATEX

Explosion protection categories for gases	None
Explosion protected category for dusts	None

Dimensions

Dimensions of the sensor	
- Width of sensor	27
- Height of sensor	108.2
- Length of sensor	35

Pin assignment

1 - A1 U _e	Brown
2 - X1 Safety input 1	White
3 - A2 GND	Blue
4 - Y1 Safety output 1	Black
5 - OUT Diagnostic output OUT	Grey
6 - X2 Safety input 2	violet
7 - Y2 Safety output 2	red
8 - IN without function	Pink

notice

Requirements for the safety monitoring module	2-channel safety input, suitable for p-type sensors with NO function. The safety monitoring module must tolerate internal functional tests of the sensors with cyclic switch-off of the sensor outputs for max. 0,5 ms. The safety monitoring module does not need to have a cross-wire short monitoring function.
---	--

Included in delivery

Actuators must be ordered separately.

Ordering code

CSS (1)-34-(2)-(3)-(4)-M-(5)

(1)

12 Actuation from top

14 Actuation from side

(2)

without Included in standard versionversions

F0 Input for enabling pushbutton, suitable for automatic start

F1 Input for reset pushbutton, with edge monitoring

(3)

S Active area lateral

V Active area front

(4)

D with Diagnostic output

SD serial diagnostic output

(5)

L with Pre-wired cable

ST with Connector

Documents

Operating instructions and Declaration of conformity (en) 454 kB, 21.11.2016

Code: mrl_css34_en

Operating instructions and Declaration of conformity (it) 374 kB, 14.06.2017

Code: mrl_css34_it

Operating instructions and Declaration of conformity (pt) 380 kB, 05.04.2017

Code: mrl_css34_pt

Operating instructions and Declaration of conformity (nl) 446 kB, 27.11.2009

Code: mrl_css34_nl

Operating instructions and Declaration of conformity (es) 380 kB, 12.12.2016

Code: mrl_css34_es

Operating instructions and Declaration of conformity (de) 439 kB, 21.11.2016

Code: mrl_css34_de

Operating instructions and Declaration of conformity (jp) 645 kB, 15.05.2017

Code: mrl_css34_jp

Operating instructions and Declaration of conformity (da) 373 kB, 22.08.2012

Code: mrl_css34_da

Operating instructions and Declaration of conformity (fr) 457 kB, 01.02.2017

Code: mrl_css34_fr

Operating instructions and Declaration of conformity (pl) 397 kB, 16.02.2017

Code: mrl_css34_pl

Wiring example (de) 148 kB, 29.09.2009

Code: kcsc3p02

Brochure (it) 2 MB, 24.09.2008

Code: b_csap05

Brochure (de) 6 MB, 15.02.2018

Code: b_css_brosch09_de

Brochure (en) 6 MB, 15.02.2018

Code: b_css_brosch09_en

Brochure (es) 2 MB, 26.08.2009

Code: b_csap09

Brochure (fr) 1 MB, 18.01.2007

Code: b_csap03


TÜV certification (en, de) 599 kB, 26.03.2015

Code: z_cssp08


EAC certification (ru) 747 kB, 05.10.2015

Code: q_6396p17_ru

Images

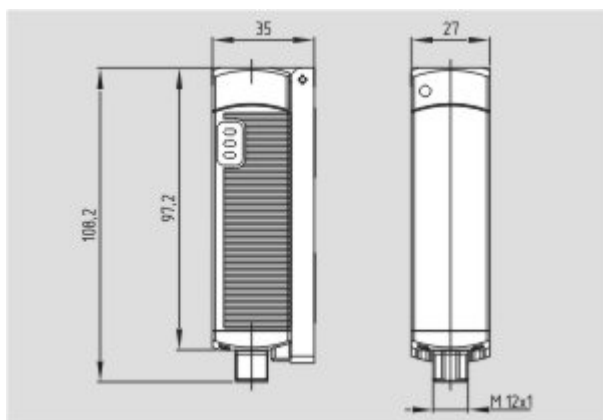

Dimensional drawing (basic component)

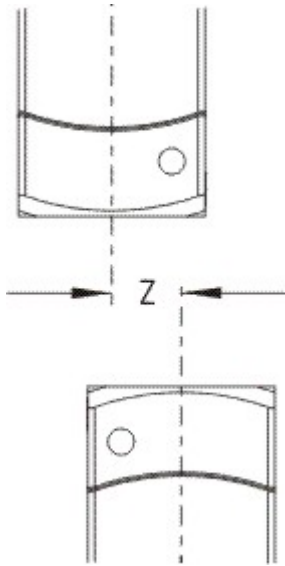

Operating principle



Clipart

System components

Actuator



101203434 - CST 34-S-3

- Front and lateral actuation of the sensor possible
- Small body



101196101 - CST 34-S-2

- Actuator with double solenoid
- for increased misalignment
- Front and lateral actuation of the sensor possible



101181429 - CST 34-V-1

- Actuation from top

101177198 - CST 180-1

- Front and lateral actuation of the sensor possible



101179574 - CST 180-2

- Front and lateral actuation of the sensor possible

Safety control modules



SRB031MC

- 1 Signalling output
- 3 safety contacts, STOP 1
- Drop-out delay can be set between 0,4 to 1,5 s
- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
- Fit for signal evaluation of outputs of safety magnetic switches



SRB 301LC/B

- Fit for signal evaluation of outputs of safety magnetic switches (to this end, integrated current and voltage limiters)
- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
- 3 safety contacts, STOP 0
- 1 Signalling output



SRB 301MC

- Fit for signal evaluation of outputs of safety magnetic switches
- 3 safety contacts, STOP 0
- 1 Signalling output
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks



SRB301ST

- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
- Fit for signal evaluation of outputs of safety magnetic switches
- 3 safety contacts, STOP 0
- 1 Signalling output

SRB304ST

- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains



- Fit for signal evaluation of outputs of safety magnetic switches
- 3 safety contacts, STOP 0
- 4 Signalling outputs



SRB324ST

- Suitable for signal processing of potential-free outputs, e.g. emergency stop command devices, position switches and solenoid interlocks
- Suitable for signal processing of outputs connected to potentials (AOPDs), e.g. safety light grids/curtains
- 3 safety contacts, STOP 0;
- 2 safety contacts, STOP 1 (adjustable 1 ... 30 s)
- 4 Signalling outputs
- Optional: Short-circuit recognition, Manual reset with edge detection in fail-safe circuit, Automatic reset function



101170036 - AES 1135

- Monitoring of BNS range magnetic safety sensors
- 1 safety contact, STOP 0
- 2 Signalling outputs



101170049 - AES 1235

- Monitoring of BNS range magnetic safety sensors
- 2 safety contacts, STOP 0
- 2 Signalling outputs