




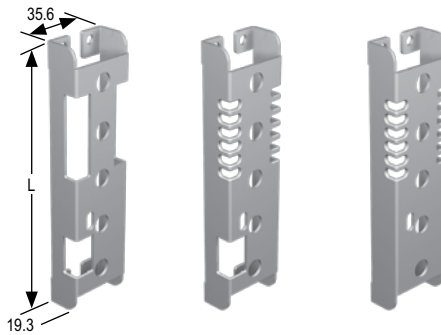

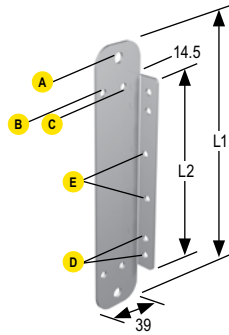


SMBPVA2	SMBPVA.., SMBPVA..A, SMBPVA..AB	SMBPVA..C																																																										
 <p>All measurements in mm</p>	 <p>All measurements in mm</p>	 <p>All measurements in mm</p>																																																										
<p>Hole center spacing: A = 18.8 Hole size: A = \varnothing 4.4</p>	<table border="1"> <thead> <tr> <th>Models</th> <th>DIP Switch Access</th> <th>Light Protected</th> <th>Length (L)</th> <th>Used With</th> </tr> </thead> <tbody> <tr> <td>SMBPVA5</td> <td>Yes</td> <td>No</td> <td rowspan="3">139.7</td> <td rowspan="3">PVA100</td> </tr> <tr> <td>SMBPVA5A</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>SMBPVA5AB</td> <td>No</td> <td>Yes</td> </tr> <tr> <td>SMBPVA10</td> <td>Yes</td> <td>No</td> <td rowspan="3">268.2</td> <td rowspan="3">PVA225</td> </tr> <tr> <td>SMBPVA10A</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>SMBPVA10AB</td> <td>No</td> <td>Yes</td> </tr> <tr> <td>SMBPVA13</td> <td>Yes</td> <td>No</td> <td rowspan="3">343.3</td> <td rowspan="3">PVA300</td> </tr> <tr> <td>SMBPVA13A</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>SMBPVA13AB</td> <td>No</td> <td>Yes</td> </tr> <tr> <td>SMBPVA16</td> <td>Yes</td> <td>No</td> <td rowspan="3">418.2</td> <td rowspan="3">PVA375</td> </tr> <tr> <td>SMBPVA16A</td> <td>Yes</td> <td>Yes</td> </tr> <tr> <td>SMBPVA16AB</td> <td>No</td> <td>Yes</td> </tr> </tbody> </table>	Models	DIP Switch Access	Light Protected	Length (L)	Used With	SMBPVA5	Yes	No	139.7	PVA100	SMBPVA5A	Yes	Yes	SMBPVA5AB	No	Yes	SMBPVA10	Yes	No	268.2	PVA225	SMBPVA10A	Yes	Yes	SMBPVA10AB	No	Yes	SMBPVA13	Yes	No	343.3	PVA300	SMBPVA13A	Yes	Yes	SMBPVA13AB	No	Yes	SMBPVA16	Yes	No	418.2	PVA375	SMBPVA16A	Yes	Yes	SMBPVA16AB	No	Yes	<table border="1"> <thead> <tr> <th>Models</th> <th>L1</th> <th>L2</th> </tr> </thead> <tbody> <tr> <td>SMBPVA5C</td> <td>188.7</td> <td>139.5</td> </tr> <tr> <td>SMBPVA10C</td> <td>317.2</td> <td>268.0</td> </tr> </tbody> </table>	Models	L1	L2	SMBPVA5C	188.7	139.5	SMBPVA10C	317.2	268.0
Models	DIP Switch Access	Light Protected	Length (L)	Used With																																																								
SMBPVA5	Yes	No	139.7	PVA100																																																								
SMBPVA5A	Yes	Yes																																																										
SMBPVA5AB	No	Yes																																																										
SMBPVA10	Yes	No	268.2	PVA225																																																								
SMBPVA10A	Yes	Yes																																																										
SMBPVA10AB	No	Yes																																																										
SMBPVA13	Yes	No	343.3	PVA300																																																								
SMBPVA13A	Yes	Yes																																																										
SMBPVA13AB	No	Yes																																																										
SMBPVA16	Yes	No	418.2	PVA375																																																								
SMBPVA16A	Yes	Yes																																																										
SMBPVA16AB	No	Yes																																																										
Models	L1	L2																																																										
SMBPVA5C	188.7	139.5																																																										
SMBPVA10C	317.2	268.0																																																										
<ul style="list-style-type: none"> Set of 4 molded brackets Snaps onto standard 28 mm diameter pipe 2 required per sensor 	<p>Hole center spacing: A to C = 20, B to C = 18, D = 13, E = 32 Hole size: A = \varnothing 7.3, B, C, D, E = \varnothing 5.2</p>	<p>Hole center spacing: A to C = 20, B to C = 18, D = 13, E = 32 Hole size: A = \varnothing 7.3, B, C, D, E = \varnothing 5.2</p>																																																										
<p>Back Mount</p>	<p>Back Mount</p>	<p>Back Mount</p>																																																										
 <p>Used with</p>	<ul style="list-style-type: none"> Protects sensor from impact; provides DIP-switch and/or indicator light exposure (depending on model) Heavy-duty cold-rolled steel-zinc finish May be used with SMBPVA..C for mounting to SMBPVA7 or SMBPVA8 brackets 	 <p>Used with</p>																																																										
<p>PVA PVD EZ-LIGHT TL30F</p>		<p>PVA PVD</p>																																																										
<p>Bracket-to-Bracket</p>	<p>Back Mount</p>	<p>Bracket-to-Bracket</p>																																																										
 <p>Used with</p>	 <p>Used with</p>	 <p>Used with</p>																																																										
<p>SMBPVA.. SMBPVA..A SMBPVA..AB</p>	<p>PVA (see chart)</p> <p>Bracket-to-Bracket</p>  <p>Used with</p>	<p>SMBPVA7* SMBPVA8* SMBPVA.. SMBPVA...A</p> <p>SMBPVA...AB SMBPVD...A SMBPVD...AB</p>																																																										
<p>SMBPVA..2 SMBPVA..7*</p>	<p>SMBPVA..8* SMBPVA..C bracket</p> <p>*Protective bracket must be mounted to a SMBPVA..C bracket.</p>	<p>*Sensor must be mounted to a SMBPVA..C bracket.</p>																																																										

- Accessories
- Brackets
- Cordsets
- Retroreflectors
- Miscellaneous
- Reference

More on next page