

4-Pin Threaded M12/Euro-Style Splitter Cordsets—Rounded Junction

Cable: PVC jacket, PUR (polyurethane) connector body, nickel-plated brass coupling nut

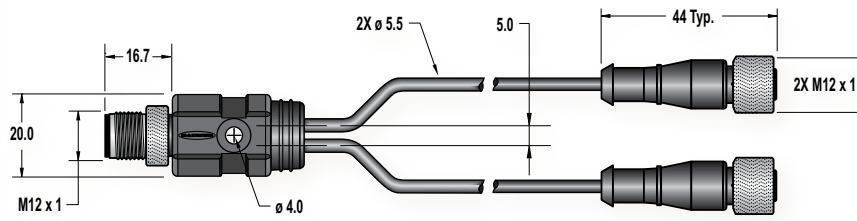
Conductors: 22 AWG, gold-plated contacts

Voltage/Current Rating: 60V ac/75V dc, 2.0A

Temperature: -40° to +105° C

Environmental Rating: IP67

Wiring: Parallel wired Y-cord

Connections					
Model	Branches (Female)	Trunk (Male)	Cable Diameter	Pinout	Used With
CSRB-M1240M1241	0.31 m	No Trunk	5.50 mm	Female  Male  1 = Brown 2 = White 3 = Blue 4 = Black	• Sensors w/4-Pin Euro QD • EZ-LIGHT
CSRB-M1240M1242	0.61 m				
CSRB-M1240M1243	0.91 m				
CSRB-M1240M1244	1.22 m				
Dimensions (mm)					
					

5-Pin Threaded M12/Euro-Style Cordsets





Cable: PVC jacket, PUR (polyurethane) connector body, nickel-plated brass coupling nut

Conductors: 22 AWG, gold-plated contacts

Voltage/Current Rating: 250V ac/dc, 4.0 A

Temperature: -40° to +105° C

Environmental Rating: IP67

Style	Length	Model	Cable Diameter	Dimensions (mm)	Pinout	Used With
Straight	0.50 m	MQDC1-501.5	5.60 mm		Female  1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray	- MINI-BEAM <i>Expert</i> - QS30 - PicoDot - Q45 Laser Retro - R55F - SL30 & SL30E - SL10 & SL10E - VTB (2-color) - QL56 - Q60 - PVD - STB - K50 - K80 - DX80 - DX81 - DX85 - EZ-LIGHT - STB w/em relay - High-Intensity Area Lights - High-Intensity Ring Lights - Sealed Backlights
	1.83 m	MQDC1-506				
	4.57 m	MQDC1-515				
	9.14 m	MQDC1-530				
Right-Angle	1.83 m	MQDC1-506RA	5.60 mm		Female  1 = Brown 2 = White 3 = Blue 4 = Black 5 = Gray	- MINI-BEAM <i>Expert</i> - QS30 - PicoDot - Q45 Laser Retro - R55F - SL30 & SL30E - SL10 & SL10E - VTB (2-color) - QL56 - Q60 - PVD - STB - K50 - K80 - DX80 - DX81 - DX85 - EZ-LIGHT - STB w/em relay - High-Intensity Area Lights - High-Intensity Ring Lights - Sealed Backlights
	4.57 m	MQDC1-515RA				
	9.14 m	MQDC1-530RA				