


# BI3-M08-AP6X


## Inductive Sensor – With Increased Switching Distance

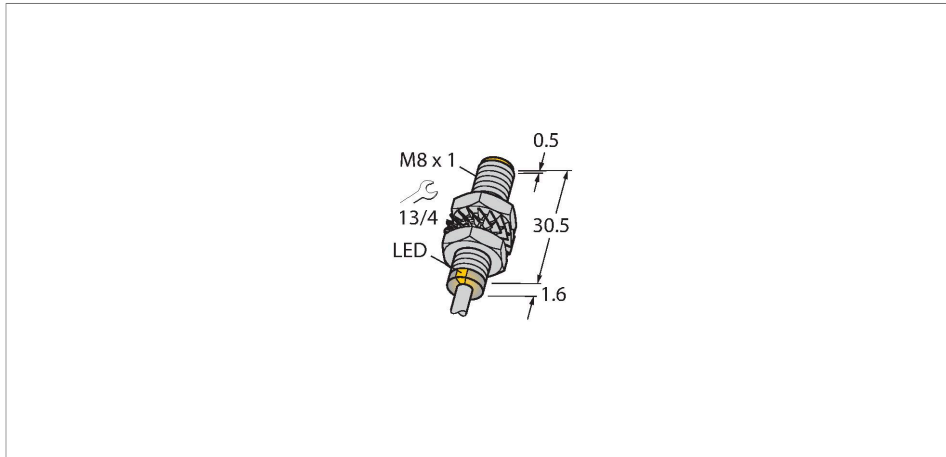

### Features

- Threaded barrel, M8 x 1
- Nickel-plated brass
- Large sensing range
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- Cable connection

### Wiring diagram

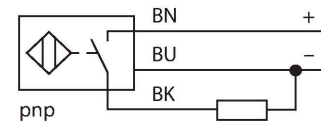

### Technical data

|   |   |
|---|---|
| Type                                      | BI3-M08-AP6X  |
| ID  | 4602910   |
| <b>General data</b>                       |   |
| Rated switching distance                  | 3 mm  |
| Mounting conditions                       | Flush   |
| Secured operating distance                | $\leq (0.81 \times S_n)$ mm                         |
| Correction factors                        | St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4 |
| Repeat accuracy                           | $\leq 2$ % of full scale                            |
| Temperature drift                         | $\leq \pm 10$ %                                     |
| Hysteresis                                | 3...15 %  |
| <b>Electrical data</b>                    |   |
| Operating voltage                         | 10...30 VDC   |
| Residual ripple                           | $\leq 10$ % $U_{ss}$                                |
| DC rated operational current              | $\leq 150$ mA                                       |
| No-load current                           | 15 mA   |
| Residual current                          | $\leq 0.1$ mA                                       |
| Isolation test voltage                    | $\leq 0.5$ kV                                       |
| Short-circuit protection                  | yes / Cyclic  |
| Voltage drop at $I_o$                     | $\leq 1.8$ V  |
| Wire breakage/Reverse polarity protection | yes / Complete                                      |
| Output function                           | 3-wire, NO contact, PNP                             |
| Switching frequency                       | 2.8 kHz   |

### Functional principle


Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.

## Technical data

| Mechanical data                       |   |
|---------------------------------------|---|
| Design                                | Threaded barrel, M8 x 1   |
| Dimensions                            | 32.1 mm   |
| Housing material                      | Metal, CuZn, Nickel Plated  |
| Active area material                  | Plastic, PP-GF20  |
| End cap                               | Plastic, PP-GF20  |
| Max. tightening torque of housing nut | 7 Nm  |
| Electrical connection                 | Cable   |
| Cable quality                         | Ø 3 mm, Gray, Lif9Y-11Y, PUR, 2 m                                   |
|                                       | Suited for E-ChainSystems® acc. to manufacturers declaration H1063M |
| Core cross-section                    | 3 x 0.14 mm <sup>2</sup>  |
| Environmental conditions              |   |
| Ambient temperature                   | -25...+70 °C  |
| Vibration resistance                  | 55 Hz (1 mm)  |
| Shock resistance                      | 30 g (11 ms)  |
| Protection class                      | IP67  |
| MTTF                                  | 2283 years acc. to SN 29500 (Ed. 99) 40 °C                          |
| Switching state                       | LED, Yellow   |

## Mounting instructions

### Mounting instructions/Description

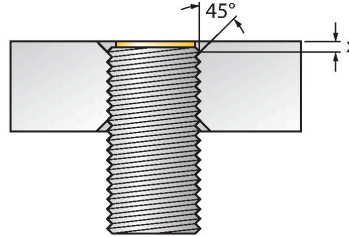

|                        |         |
|------------------------|---------|
| Distance D             | 2 x B   |
| Distance W             | 3 x Sn  |
| Distance T             | 3 x B   |
| Distance S             | 1.5 x B |
| Distance G             | 6 x Sn  |
| Diameter active area B | Ø 8 mm  |

Flush installation in brass, aluminium and stainless steel with the supplied nuts is possible without restrictions.


If installed flush in steel, a phase of 45° and min. depth of 1.7 mm (dimension X) must be observed.

## Accessories

MW-08

6945008


Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)

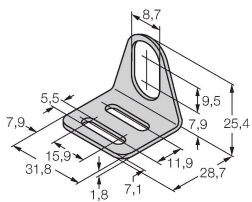

BSS-08

6901322

Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene



MBS80

69479

Mounting clamp for smooth barrel sensors; mounting block material: Anodized aluminum

