



**BRT-35DM**

Description: Round, acrylic target with mounting stud

Reflectivity Factor: 1.2

Temperature: -20° to +60° C


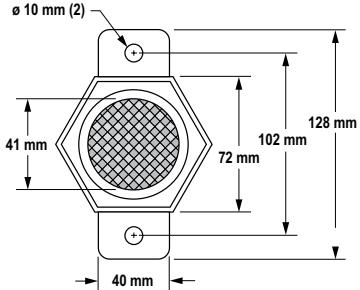
Other: This target has micro-prism geometry.

**BRT-41AHT**

Description: Round, borosilicate (Pyrex type) glass target

Reflectivity Factor: 1.0



Temperature: -20° to +200° C

**BRT-42**

Description: Round, acrylic target

Reflectivity Factor: 1.0


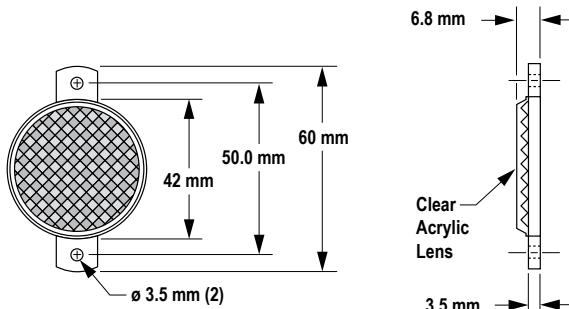
Max. Temperature: 65° C

**BRT-42A**

Description: Round, acrylic target

Reflectivity Factor: 1.0



Temperature: -20° to +60° C

**BRT-42D**

Description: Round, acrylic target with mounting stud

Reflectivity Factor: 1.0



Temperature: -20° to +60° C

**BRT-2A**

Description: Round, acrylic target

Reflectivity Factor: 1.0

Max. Temperature: 65° C



More  
on next  
page

Accessories

Brackets

Cordsets

Retroreflectors

Miscellaneous

Reference