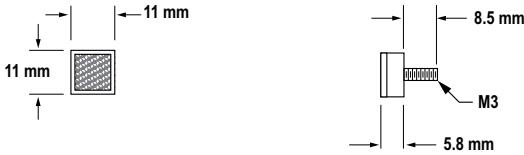


BRT-11X11M

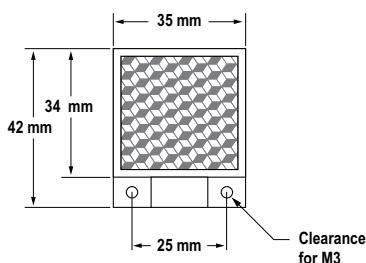
Description: Square, acrylic target
 Reflectivity Factor: 1.2
 Temperature: -20° to +60° C
 Other: This target has micro-prism geometry.

**BRT-11X11MD**

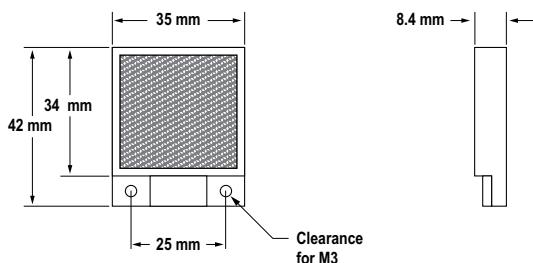
Description: Square, acrylic target with mounting stud
 Reflectivity Factor: 1.2
 Temperature: -20° to +60° C
 Other: This target has micro-prism geometry.

**BRT-35X35B**

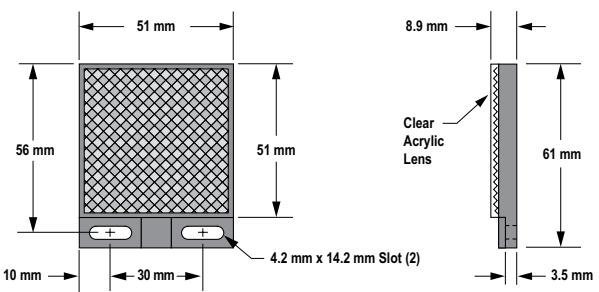
Description: Square, acrylic target
 Reflectivity Factor: 1.3
 Temperature: -20° to +60° C

**BRT-35X35BM**

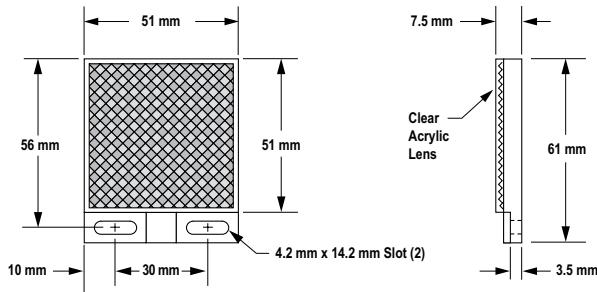
Description: Square, acrylic target
 Reflectivity Factor: 1.2
 Temperature: -20° to +60° C
 Other: This target has micro-prism geometry.

**BRT-2X2**

Description: Square, acrylic target
 Reflectivity Factor: 1.0
 Max. Temperature: 50° C
 Others: Optional brackets are available. See page 620.

**BRT-2X2LVC**

Description: Square, acrylic target
 Reflectivity Factor: 1.0
 Max. Temperature: -20° to +60° C
 Others: Optional brackets are available. See page 620.



More on next page

Accessories

Brackets

Cordsets

Retroreflectors

Miscellaneous

Reference