





WLS15 LED Strip Lights


- Low-profile design for easy installation in tight spaces
- 12 or 24 V dc operation in one model
- Completely sealed with an IP67 rating for use in wet or dusty environments
- The rugged construction and polycarbonate shell resists shock and vibration while remaining lightweight
- LED lighting technology saves energy and minimizes replacement costs
- Brackets and connectors are available to keep installation simple
- Draws half the current of other lights for a low power device and high energy savings
- Offers stability in the presence of line voltage fluctuations

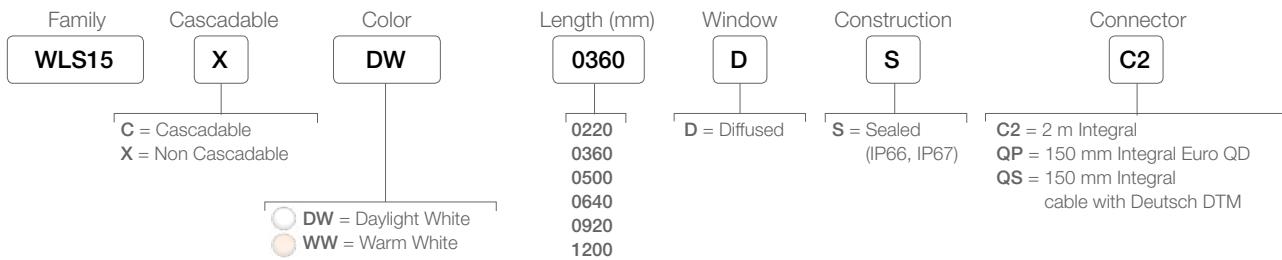

Supply Voltage and Current	12 V dc or 24 V dc nominal
Construction	Clear anodized aluminum inner housing; Polycarbonate outer housing, Polyamide end caps
Environmental Rating	Rated IEC IP66 and IEC IP67 Suitable for wet locations per UL 2108
Operating Conditions	Temperature: -40 to +60 °C Storage Temperature: -40 to +70 °C
Certifications	   

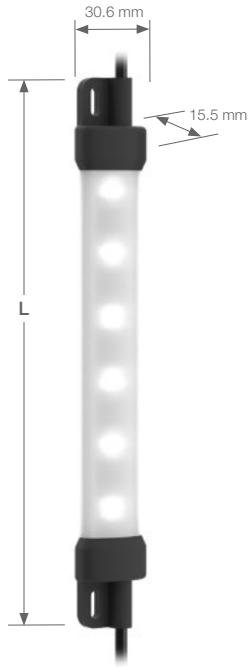

Length (mm)	Typical Current (A) at 25 °C		Maximum Current (A) at -40 °C		Lumens	
	12 V dc	24 V dc	12 V dc	24 V dc	Daylight White	Warm White
0220	0.19	0.10	0.24	0.12	175	170
0360	0.38	0.20	0.48	0.24	350	340
0500	0.57	0.30	0.72	0.36	525	510
0640	0.76	0.40	0.96	0.48	700	680
0920	1.14	0.60	1.44	0.72	1050	1020
1200	1.52	0.80	1.92	0.96	1400	1360

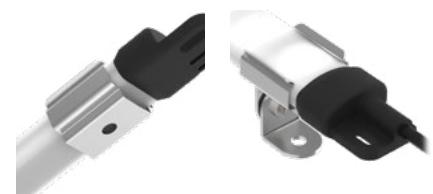

LMBWLS15

LMBWLS15-150S



LMBWLS15MAG



PSW-24-1
Power Supply

4-Pin M12/Euro-Style
Straight connector models listed; for right-angle, add RA to the end of the model number (example, MQDC-406RA)



MQDC-406
2 m (6.5')
MQDC-415
5 m (15')
MQDC-430
9 m (30')

4-Pin M12/Euro-Style
Splitter

CSB-M1241M1241
0.3 m (1') male trunk;
2 x 0.3 m (1') female branches

4-Pin M12/Euro-Style
Double-Ended (straight male/straight female connectors)

MQDEC-401SS
0.3 m (1')
MQDEC-403SS
1 m (3')
MQDEC-406SS
2 m (6.5')

Deutsch
Single-ended cordset with straight connectors

DTMC-206
2 m (6.5')
DTMC-215
5 m (15')
DTMC-230
9 m (30')

4-Pin M12/Euro-Style
Splitter

CSB-M1241M1241
0.3 m (1') male trunk;
2 x 0.3 m (1') female branches

Deutsch
Double-ended cordset with straight connectors

DTMEC-2005
0.16 m (0.5')
DTMEC-206
2 m (6')
DTMEC-230
9 m (30')

Additional cordset lengths and accessories are available at bannerengineering.com