

15, 20 & 30A 120/277V AC

LEVITON®

Industrial Grade, Back & Side Wired

10 YEAR LIMITED
WARRANTY

ELECTRICAL			
DIELECTRIC VOLTAGE	OVERLOAD UL 20 TEST	TEMP. RISE	ENDURANCE
Withstands 1500V for 1min	100 cycles of overload at 4.8 times rated current	30°C max at full rated current	UL 20/Fed Spec 50,000 cycles min., tungsten filament lamp load (Fed. Spec.) WS896E, SP, DP, 3-way, 4-way, Pilot Light, Illum., Key Lock

ENVIRONMENTAL	
FLAMMABILITY	OPERATING TEMP.
Rated V-2 per UL 94	-40°C to 65°C

MECHANICAL			
TERMINAL I.D.	TERMINAL ACCOMM.	PRODUCT I.D.	TORQUE RANGE
Brass-Hot, Black-Hot, White-Neutral, Green-Grounding	#14-#10 AWG back wired #14-#12 AWG side wired	Ratings are permanently stamped on device strap	12-14 inch pounds

STANDARDS & CERTIFICATION					
NEMA WD-1 & WD6	ANSI C-73	UL 20	UL Fed Spec WS896E	CSA C22.2 No. 111	NOM
✓	✓	#E7458	#E7458	#152105	#057



1201-PLG



1222-PLR



3031-LHI

AC HORSEPOWER RATINGS		
15 AMP	20 AMP	30 AMP
1/2@120V	1@120V	2@120V
12 AMP MAX	16 AMP MAX	24 AMP MAX

Pilot Light

Illuminated when load is ON. Requires neutral wire.

TOGGLE COLOR	SINGLE-POLE TOGGLE	DOUBLE-POLE TOGGLE	3-WAY TOGGLE
15 AMP 120V			
Clear	1201-PLC	—	1203-PLC
Red	1201-PLR	1202-PLR	1203-PLR
Green	1201-PLG	—	1203-PLG
20 AMP 120V			
Clear	1221-PLC	1222-PLC	1223-PLC
Red	1221-PLR	1222-PLR	1223-PLR
Green	1221-PLG	1222-PLG	1223-PLG
20 AMP 277V			
Clear	1221-7PC	—	—
Red	1221-7PR	1222-7PR	1223-7PR
30 AMP 120V			
Clear	3031-PLC	3032-PLC	—
Red	3031-PLR	3032-PLR	—


Lighted Handle

Illuminated when load is OFF. Does not require neutral wire.


TOGGLE COLOR	SINGLE-POLE TOGGLE	3-WAY TOGGLE
15 AMP 120V		
Clear	1201-LHC	1203-LHC
Ivory	1201-LHI	1203-LHI
White	1201-LHW	1203-LHW
20 AMP 120V		
Clear	1221-LHC	1223-LHC
Ivory	1221-LHI	1223-LHI
White	1221-LHW	1223-LHW
20 AMP 277V		
Clear	1221-7LC	1223-7LC
Ivory	1221-7LI	1223-7LI
White	1221-7LW	1223-7LW
30 AMP 120V		
Ivory	3031-LHI	—

NYLON WALLPLATES				302 STAINLESS STEEL WALLPLATES			
80701-I	80709-I	80711-I	80707-I	84001-40	84009-40	84011-40	84001-E40

FOR ADDITIONAL WALLPLATE OPTIONS SEE SECTION Q

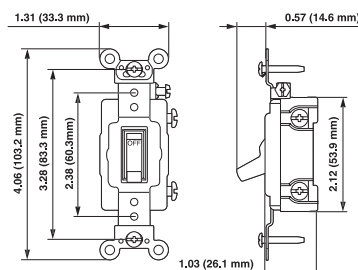

SINGLE POLE

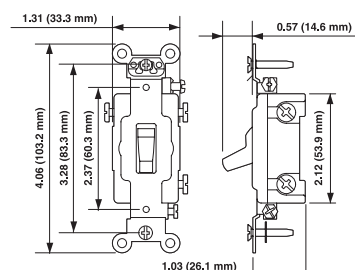

3-WAY

To learn more about Leviton devices or for answers to technical questions call our Techline at 1-800-824-3005 or visit us at www.leviton.com

Courtesy of Steven Engineering, Inc.-230 Ryan Way, South San Francisco, CA 94080-6370-Main Office: (650) 588-9200-Outside Local Area: (800) 258-9200-www.stevenengineering.com