

Straight Blade Receptacles



5262-I



5252-SI

Back and Side Wired (Basic Cat. No. Denotes Brown Device*)

DESCRIPTION	CAT. NO./COLOR 15A/125V	CAT. NO./COLOR 15A/250V	CAT. NO./COLOR 20A/125V	CAT. NO./COLOR 20A/250V
	5-15R 	6-15R 	5-20R 	6-20R 
Duplex Receptacle, Brass Strap	5262 I, W, GY, R, E	5662 I	5362 I, W, GY, R, E	5462 I, GY
Single Receptacle	5261 I, W, GY	5661 I	5361 I, W, GY, A, E	5461 I, A, GY
Narrow Body Duplex Receptacle	5252 I, W (No Brown)	—	5352 I, W (No Brown)	—
Single Receptacle, Clockhanger	5261-CH Stainless Steel	—	5361-CH Stainless Steel	—
Duplex Receptacle, Slim Body, Smooth Face	5262-S I, W, GY, R, BU, A	—	5362-S I, W, GY, R, BU, A	—

Note: Single Receptacles meet Federal Specifications WC-596 but have a different construction and design than Duplex Receptacles listed above.

Back and Side Wired — Isolated Ground Receptacles (-IG) (Basic Cat. No. Denotes Orange Device*)

DESCRIPTION	CAT. NO./COLOR 15A/125V	CAT. NO./COLOR 15A/250V	CAT. NO./COLOR 20A/125V	CAT. NO./COLOR 20A/250V
Slim Design Duplex Receptacle	5262-IG B, I, W, G, R	5662-IG —	5362-IG B, I, W, A, G, R	5462-IG —
Slim Design, Canadian Version Duplex Receptacle	5262-SIG —	—	5362-SIG —	—


Side Wired (Basic Cat. No. Denotes Brown Device*)

DESCRIPTION	CAT. NO./COLOR 15A/125V	CAT. NO./COLOR 15A/250V	CAT. NO./COLOR 20A/125V	CAT. NO./COLOR 20A/250V
Duplex Receptacle	5242 I, W, GY, R	—	5342 I, W, GY, R	—
Single Receptacle	5251 I	5651 I, W	5351 I	—

Back and Side Wired Dual Voltage (Basic Cat. No. Denotes Brown Device*)

DESCRIPTION	RATING	CAT. NO.	COLOR
Duplex Receptacle	15A 125V/15A 250V	5292	I

All devices are UL Listed and CSA Certified.

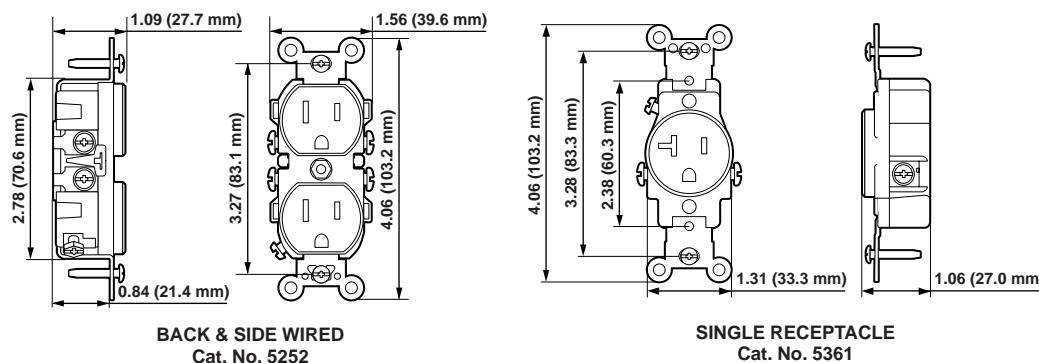

BACK & SIDE WIRED
Cat. No. 5252

SINGLE RECEPTACLE
Cat. No. 5361

To learn more about Leviton's outstanding offering of devices visit our Website at: www.leviton.comBuilding a Connected World