



15A 277V AC

LEVITON®

Industrial Grade



NEMA L7-15P



NEMA L7-15R



ELECTRICAL		
DIELECTRIC VOLTAGE	CURRENT INTERR.	TEMP. RISE
Withstands 2000V per UL 498	Full rated current	Max 30°C after 250 cycles of overload at 200% of rated current

MECHANICAL			
TERMINAL I.D.	TERMINAL ACCOMM.	PRODUCT I.D.	CORD GRIP RANGE
Brass, hot	#18 – #10 AWG	Ratings & NEMA I.D. permanently marked on device	.245" – .700"
Grounding			
White, neutral			
ENVIRONMENTAL			
FLAMMABILITY		OPERATING TEMP.	
Rated V-2 per UL 94		-40°C to 60°C	

STANDARDS & CERTIFICATIONS					
NEMA WD-6	ANSI C-73	UL 498	UL Fed Spec Listed WC-596	CSA C22.2 No.42	NOM
✓	✓	✓	#E13393 Plugs, Connectors & Flanged Inlets	#LR-406	#057
			#E13399 Receptacles & Flanged Outlets		



4750 (DUPEX)



4770-CY



4779-CY



4770-CA




4786-C



TYPE	PLUG	CONNECTOR	ANGLE PLUG	FLANGED INLET	FLANGED OUTLET
15A 277V, NEMA L7-15P AND L7-15R, 2-P 3-W, Grounding					
All Black — Bulk Packaged	4770-B	4779-B	—	—	—
Black & White	4770-C	4779-C	4770-CA	—	—
Yellow & White	4770-CY	4779-CY	—	—	—
All White	—	—	—	4786-C	4785-C
Power Indication Black & White	4770-PLC	4779-PLC	—	—	—

TYPE	DUPEX RECEPTACLE SELF-GROUNDING BACK & SIDE WIRED	DUPEX RECEPTACLE ISOLATED GROUND BACK & SIDE WIRED	SINGLE RECEPTACLE	SINGLE RECEPTACLE with SHORT STRAP	SINGLE RECEPTACLE ISOLATED GROUND
15A 277V, NEMA L7-15R, 2-P 3-W, Grounding					
Black	4750	—	4760	4760-SS	—
Orange	—	4750-IG	—	—	4760-IG

THERMOPLASTIC ELASTOMER BOOTS		GRAY LEXAN FLIP LID COVER		302 STAINLESS STEEL	302 STAINLESS STEEL
For Plugs	For Connectors	For Inlets and Outlets		Single Receptacles	Duplex Receptacles
<p>6017-L (Black) 6017-LY (Yellow)</p>	<p>6018-L (Black) 6018-LY (Yellow)</p>	<p>IP64 Rated Includes Gasket WP1</p>	<p>1.40" Dia. Hole 84004-40</p>	<p>84003-40</p>	
FOR DIMENSIONS SEE PAGE E42			FOR ADDITIONAL WALLPLATE OPTIONS SEE SECTION Q		

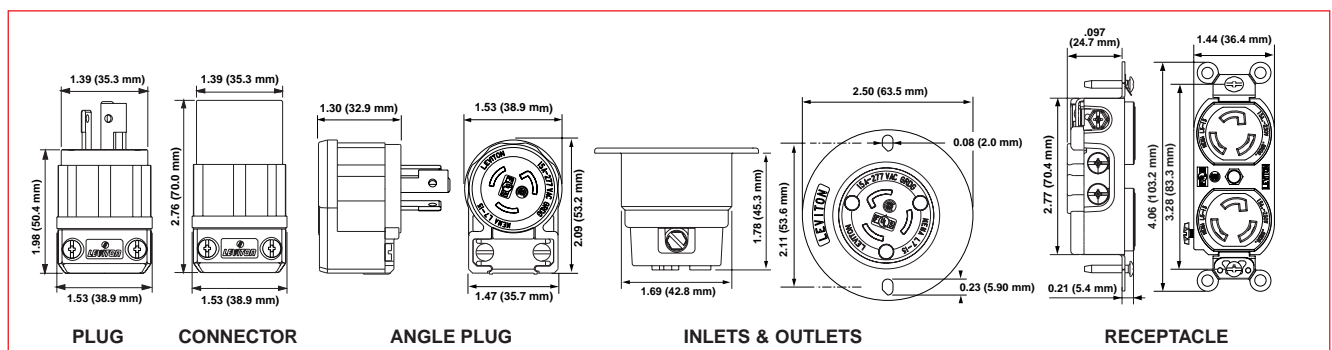

Industrial Grade Locking Devices

E

7

To learn more about Leviton devices or for answers to technical questions call our Techline at 1-800-824-3005 or visit us at www.leviton.com