

# Straight Blade Plugs and Connectors

## 10 AMP and 15 AMP Parallel Plugs and Connectors

10 AMP 125V w/18-2 SPT-1 Cord

3 AMP 125V w/20-2XT Cord

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Easy Wire Plug	123	Brown		No. 18-2SPT-1 or No. 20-2 XT Only	1-15P Non-Polarized 
	123-I	Ivory			
	123-W	White			
Same as No. 123, Polarized	123-P*	Brown			1-15P Polarized 
	123-PI*	Ivory			
	123-PW*	White			

\*Packed 500 Bulk



## 15 AMP 125V 2-Pole, 2-Wire

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
Polarized Light Duty Clamptite Plug	101	Brown	Up to .250"	No. 20, 18, 16 Flat or Round	
	101-W	White			
	101-E	Black			
Note: Consult factory for availability of non-polarized version					
Polarized Light Duty Clamptite Connector	102	Brown	Up to .250"	No. 20, 18, 16 Flat or Round	
	102-W	White			
	102-E	Black			
Non-Polarized Heavy-Duty PVC Plug	115PV	Yellow			
Non-Polarized Heavy-Duty TPE Rubber Plug	115PR	Black	.245-.655"	AWG 18-2 to 12-2 cable.	
Non-Polarized Short Flat Vinyl Plug★	48643	Brown	.375 max.	18-14	1-15P Polarized 
	48643-W	White			
	48643 E	Black			
Polarized Angle Vinyl Plug★	638	Black	.343 max.	16 max.	1-15R Polarized 
	638-B	Brown			
	638-W	White			
Non-Polarized Round Vinyl Handle Plug, w/Cord Clamp★	48646	Black	.437 max.	18-14	
Non-Polarized Vinyl Connector, w/Cord Clamp★	612†	Black	.437 max.	14 max.	
Non-Polarized Round Vinyl Handle Plug, w/Spring Blades★	48642	Black	.375 max.	18-14	

\*Packed 500 bulk. †Not UL Listed. For replacement use only.

All devices are UL Listed. Also CSA Certified except where indicated by★



## SPECIFICATIONS & FEATURES


- Brass plug blades and connector contacts for maximum conductivity
- Armed devices have heavily plated steel shields and cord clamps
- Vinyl devices resist chipping, cracking, oils, grease and acids
- Rubber devices resist cold, abrasion, grease, oils, acids and impact
- Plastic devices resist grease, oils and acids

## TESTING & CODE COMPLIANCE

- Meet NEMA requirements (1-15P)
- UL Listed (File #E-13393)
- CSA Certified
- NOM Certified (#057)
- Backed by a Limited Two-Year Warranty

## MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94  
Operating Temperature: -40°C to 65°C

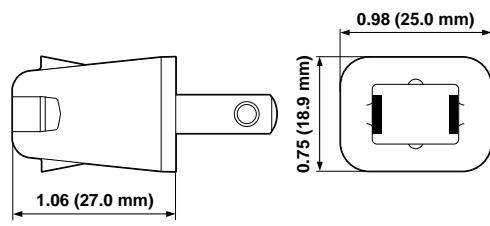

Cat. No. 123