

Classic - Pneumatic AirVal

MD
MEDIUM DUTY

Variable/Momentary Pneumatic Control

LONG TREADLE THROW DESIGN

Materials of Construction:

- Variable Flow design
- Internal Valve is constructed of a Non-Ferrous body, Stainless steel plunger and Teflon coated buna-N O-rings
- Air flows when plunger is depressed, stops flowing when plunger is released and exhausts back pressure on output side
- Air exhausts around plunger
- Versatility And Good Looks
- Cast Aluminum Housing



Features & Benefits:

- Nonskid Base Pad
- Designed for long life operation
- Two-Way models do not exhaust back pressure
- Plunger can be depressed flush with valve body without damage to valve
- Standard 1/8-27 N.P.T. input and output ports
- Filtered and lubricated air supply is required for best operation
- Line pressure up to 150 P.S.I.


Options:

- 2-way, 3-way & Variable
- Heavy gauge steel guard available (See "Accessories - Guards" on page 74 & 75 for details)

⚠ WARNING

COMPRESSED AIR IS POWERFUL – ALWAYS USE CARE.
MAXIMUM LINE PRESSURE UP TO 150 P.S.I.

Size (HxWxD):	1.68 x 3.25 x 5.39 In.
Weight:	Weight: 1.13 lbs.

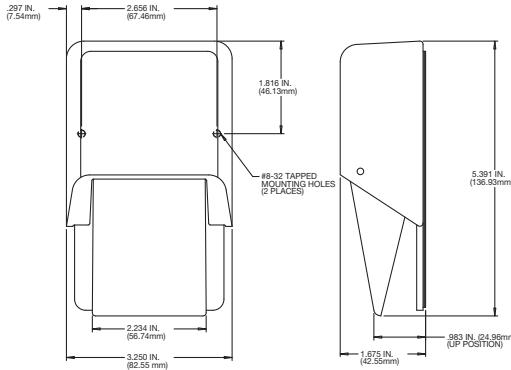

⚠ WARNING SEE PRODUCT WARNING ON PAGE 8

SPECIFICATIONS (Special variations are available to the O.E.M. on special order on the models listed below)

AGENCY APPROVALS	CATALOG NUMBER	DESCRIPTION	AIR FLOW AT 100 P.S.I.	EXHAUST AT 100 P.S.I.	OPERATING FORCE	PORTS 1/8-27 N.P.T.
N/A	2E-30A2-S	2-Way Momentary	30 C.F.M.	NONE	2 1/2 Pounds	Interior Housing
N/A	3E-30A2-S	3-Way Momentary	30 C.F.M.	25 C.F.M.	2 1/2 Pounds	Interior Housing
N/A	2E-20V2-S	2-Way Variable Momentary	20 C.F.M.	NONE	2 1/2 Pounds	Interior Housing
N/A	3E-20V2-S	3-Way Variable Momentary	20 C.F.M.	6 C.F.M.	2 1/2 Pounds	Interior Housing