

EN 60529 Degree of Protection IP20 (IP68 Upon Request)

Waterproof (Available)
LARGE LOW PROFILE ERGONOMIC DESIGN

Materials of Construction:

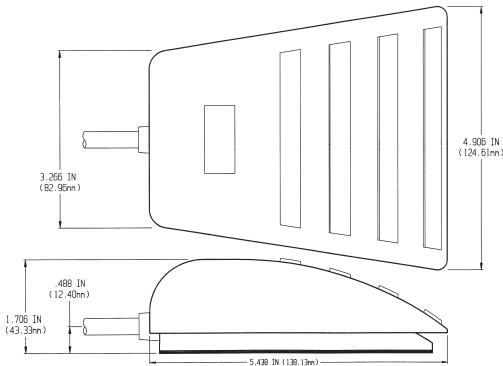
- Constructed of Cast Aluminum
- Painted gray

Features & Benefits:



- The parabolic curvature of the cover makes the Deluxe easy to operate without fatigue
- Full nonskid base pad

Options:

- Twin and triple models available - special order
- Guarding available for Twin & Triple models



Size (HxWxD):	1.75 x 4.75 x 5.50 In.
Weight:	1.00 lbs.

⚠ WARNING SEE PRODUCT WARNING ON PAGE 8						
SPECIFICATIONS (Special variations are available to the O.E.M. on special order on the models listed below)						
AGENCY APPROVALS	EN 60529 Degree of Protection	CATALOG NUMBER	DESCRIPTION	CIRCUIT	FORM	ELECTRICAL RATINGS
 US	IP20	81-S	Momentary	SPDT	C	10 A 125-250 VAC 1/2 H.P. 125-250 VAC
 US	IP20	85-S	Two Stage Momentary	Each Stage SPDT	C	