



TREADLITE II FOOT SWITCHES

EN 60529 Degree of Protection IP20




The T-91-SWANOS, T-91-SWANO3S and T-91-SWANO38S models have formed stainless steel housings. The three models also meet the requirements of IP68 as well as NEMA & U.L. Enclosure Types 1, 4X, 6 & 6P.



Stainless steel full guard (single), 522-K26 available. (4 lbs.)

WARNING SEE INSIDE FRONT COVER

SPECIFICATIONS (Special variations are available to the O.E.M. on special order on the models listed below)

TREADLITE II CATALOG NUMBER			DESCRIPTION	CIRCUIT	FORM	ELECTRICAL RATINGS
	T-91-SWANOS*	NEMA Type 1, 4X, 6, & 6P	Momentary	SPST-N.O.	A	3A 125-250 VAC
	T-91-SWANO3S**	IP68 & stainless steel	Momentary	SPST wired N.O.	A	3A 125 VAC
	T-91-SWANO38S***	UL Enclosure 1, 4X, 6, & 6P	Momentary	SPST wired N.O.	A	3A 125-250 VAC

* Supplied without cordset.
** Supplied with 8 ft. 18/3 cord and 3-prong series plug, green lead grounded.
*** Supplied with 8 ft. 18/3 cord without plug, green lead grounded.

EUROPEAN FOOT SWITCHES

EN 60529 Degree of Protection IP20

EN 60529 Degree of Protection IP21 for VK Models

Five standard European type foot switches are offered prewired with 3 conductor cordsets having brown, blue and green/yellow colored leads. All are momentary contact and wired normally open with green/yellow lead grounded to switch base.












TREADLITE II

GEM-V

WARNING SEE INSIDE FRONT COVER

SPECIFICATIONS (Special variations are available to the O.E.M. on special order on the models listed below)


EUROPEAN CATALOG NUMBER		SERIES	CIRCUIT	FORM	ELECTRICAL RATINGS	CORDSETS
 	T-91-SCEA*	Treadlite II	All models Momentary Contact & Wired SPST-NO & Grounded	A	10 A 125-250 VAC ½ H.P. 125-250 VAC	Complete with 2 meter 18/3 cord with brown, blue green/yellow leads
 	GEM-VCEA	Gem-V				
 	T-91-SCE*	Treadlite II	SPDT	C	16 A 125-250 VAC ½ H.P. 125-250 VAC	Complete with 2 meter 14/3 cord No Cord
  	T-91-SE*	Treadlite II				

*Full Guard #522-B14 supplied separately.

CE MARKING – see note on inside front cover.


Deluxe Model

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

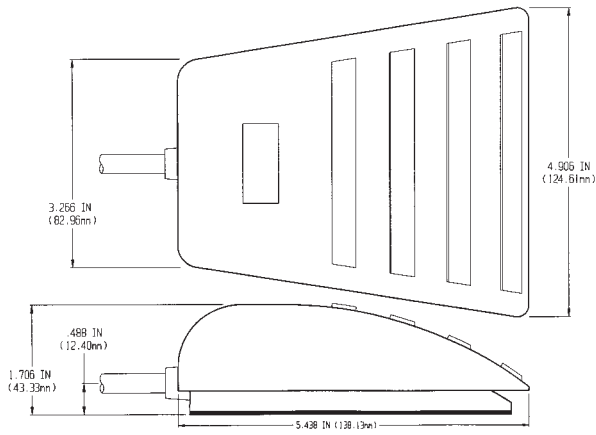



Deluxe II Model

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

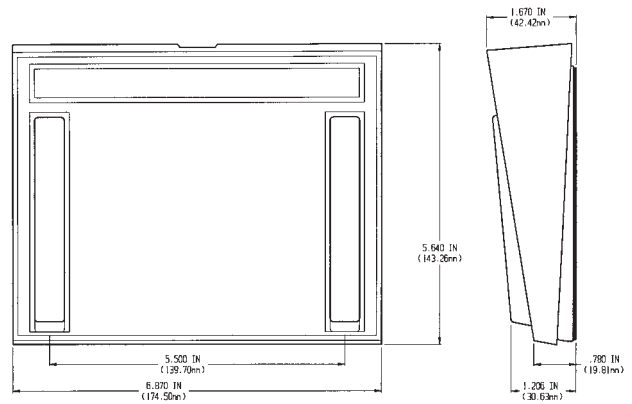



Compact Models

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

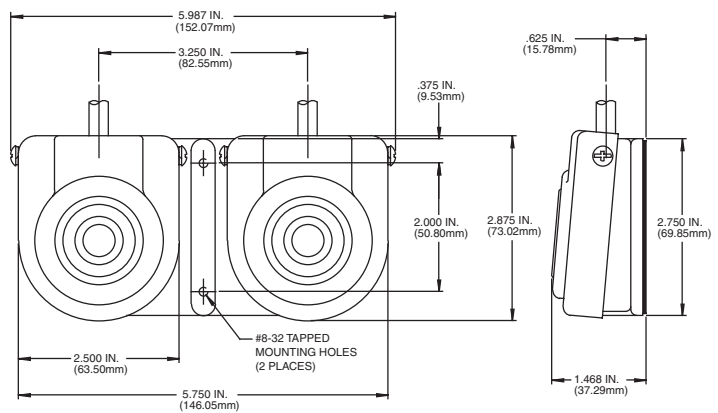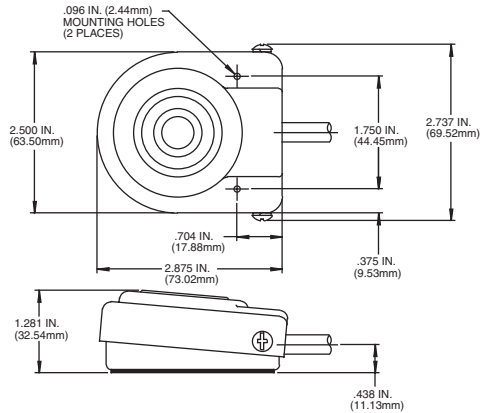



Hi-Treadlite Models

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

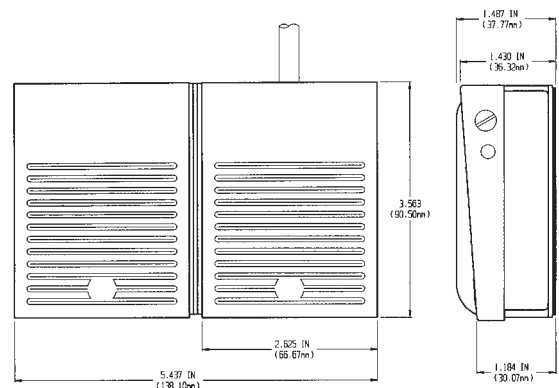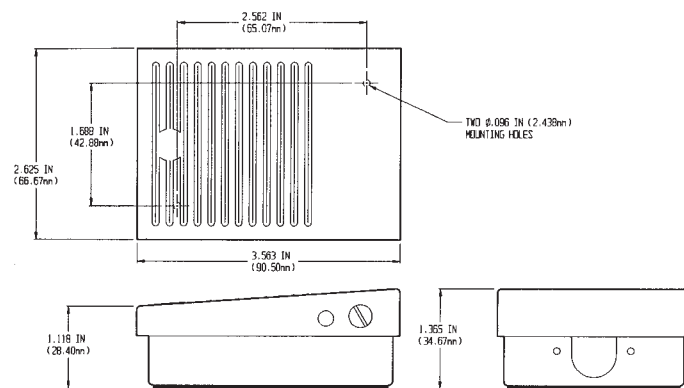


Treadlite II Models

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

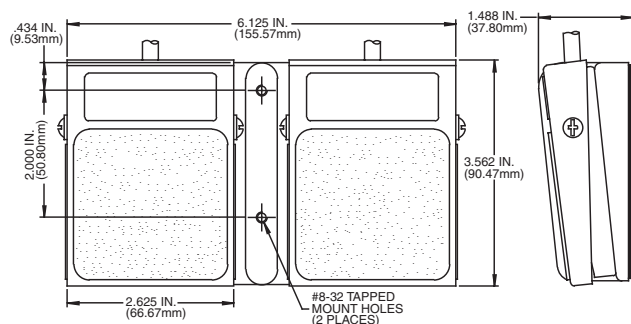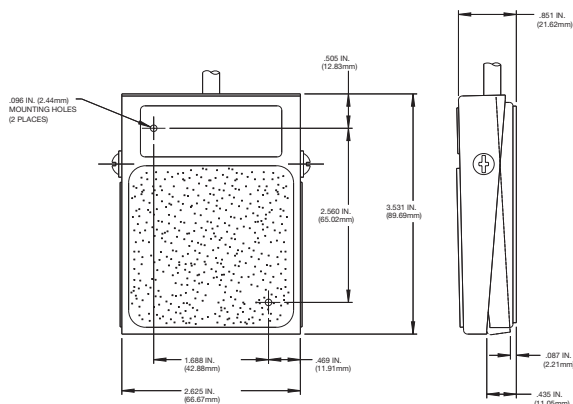


Premier Model

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

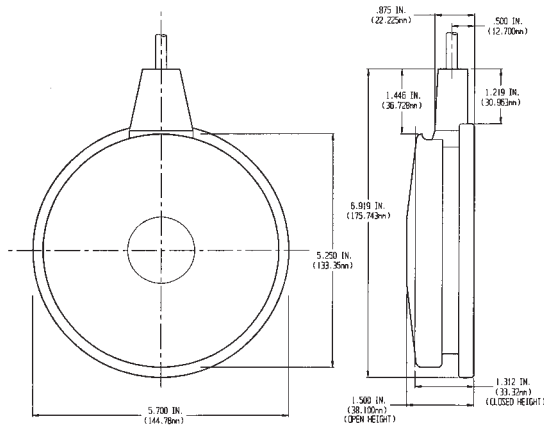



Dolphin Model

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

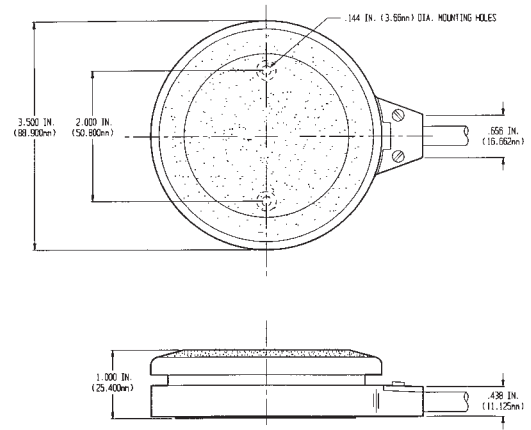

Gem-V and Gem-VK Models

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

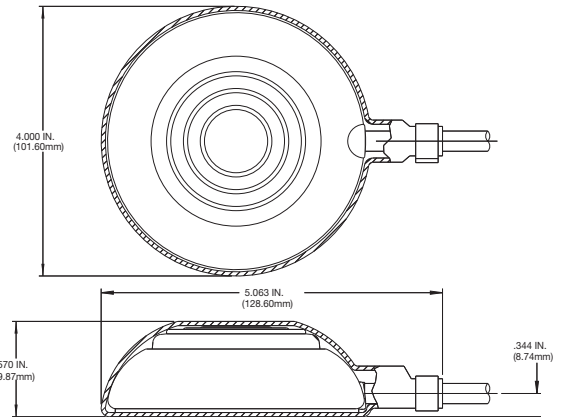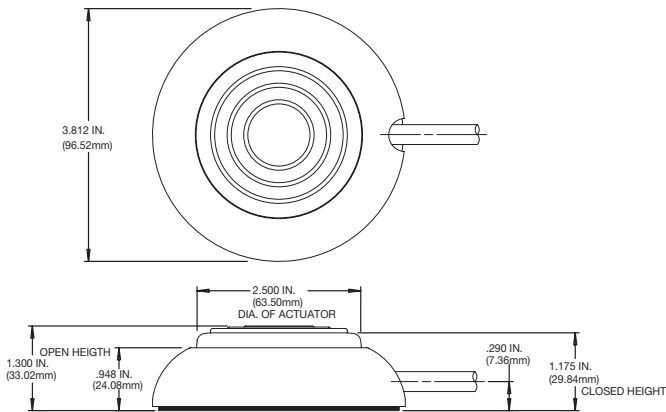

Full Guards

NOTE: DIMENSIONS ARE FOR REFERENCE ONLY

