

**NEMA Type 2 UL ENCLOSURE 2 (VK ONLY)**  
**EN 60529 Degree of Protection IP21 (IP68 Upon Request)**

**Driptight • Dusttight (VK ONLY) Corrosion Resistant**  
**COMPACT OMNI-DIRECTIONAL DESIGN**

**Materials of Construction:**

- Mounted in a chrome plated heavy zinc die cast housing
- A full nonskid base pad
- A special vinyl cover gives added environmental protection against limited amounts of water and dirt
- The dip molded cover is bonded to the vinyl base pad of the foot switch

**Features & Benefits:**


- Features a round black actuating cap
- Moderate pressure from any direction operates the switch
- Standard models supplied with cordset
- Wired normally open and grounded
- Ease of operation with foot or hand
- The cable entry boot is clinched tight to the cordset

**Options:**

- Special paint finish available
- Silk Screening available
- Special single wiring channel with or without side protectors available
- Twin version available
- European type foot switch is offered pre wired with 3 conductor cordset having brown, blue and green/yellow colored leads. It is a momentary contact and wired normally open with green/yellow lead grounded to switch base



V Series	
Size (Dia. x H):	3.81 x 1.22 In.
Weight:	1.00 lbs.
VK Series	
Size (Dia. x H):	4.00 x 1.38 In.
Weight:	1.5 lbs.

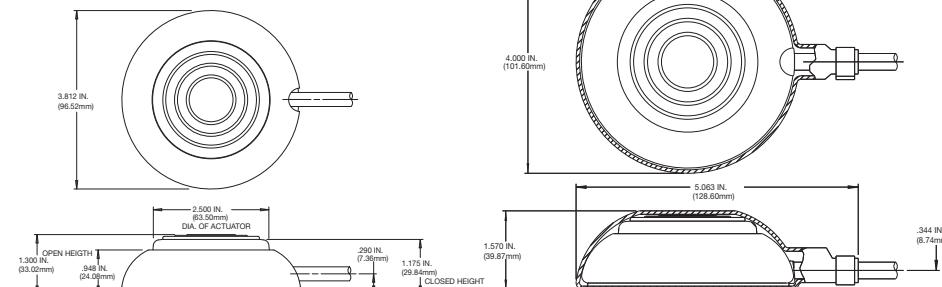

**WARNING SEE PRODUCT WARNING ON PAGE 8**

SPECIFICATIONS (Special variations are available to the O.E.M. on special order on the models listed below)

AGENCY APPROVALS	EN 60529 Degree of Protection	CATALOG NUMBER	DESCRIPTION	CIRCUIT	FORM	ELECTRICAL RATINGS
cUL us	IP21	GEM-VK3 <sup>1</sup>	Momentary / Vinyl Cover	SPST Wired N.O.	A	10 A 125 VAC 1/2 H.P. 125 VAC
cUL us CE	IP21	GEM-VK36 <sup>2</sup>	Momentary / Vinyl Cover	SPST Wired N.O.	A	10 A 125-250 VAC 1/2 H.P. 125-250 VAC
cUL us CE	IP20	GEM-VCEA <sup>3</sup>	Momentary	SPST Wired N.O.	A	10 A 125-250 VAC 1/2 H.P. 125-250 VAC
cUL us CE	IP20	GEM-V2	Momentary	SPDT	C	15 A 125-250 VAC 1/2 H.P. 125-250 VAC
cUL us	IP20	GEM-V3 <sup>1</sup>	Momentary	SPST Wired N.O.	A	10 A 125 VAC 1/2 H.P. 125 VAC
cUL us CE	IP20	GEM-V36 <sup>2</sup>	Momentary	SPST Wired N.O.	A	10 A 125-250 VAC 1/2 H.P. 125-250 VAC

<sup>1</sup>Supplied with 6 ft. 18/3 cord and 3 prong series plug. Green lead grounded. <sup>2</sup>Supplied with 6 ft. 18/3 cord without plug. Green lead grounded.

<sup>3</sup>Supplied with 2 meter 18/3 brown, blue & green/yellow leads.