

EN 60529 Degree of Protection IP20 (IP68 Upon Request)

**Splash Resistant (Available)
LOW PROFILE ERGONOMIC DESIGN**

Materials of Construction:

- Constructed of cast aluminum cover and base
- Provided with a reversible strain relief clamp that accommodates a wide range of cable sizes
- Painted black




Features & Benefits:

- The low, sleek styling of this model reduces operator fatigue
- Nonskid base pads

Options:

- 24" wide version available on special order
- AirVal Models available on special orders

Size (HxWxD):	1.25 x 3.25 x 5.50 in.
Weight:	1.00 lbs.

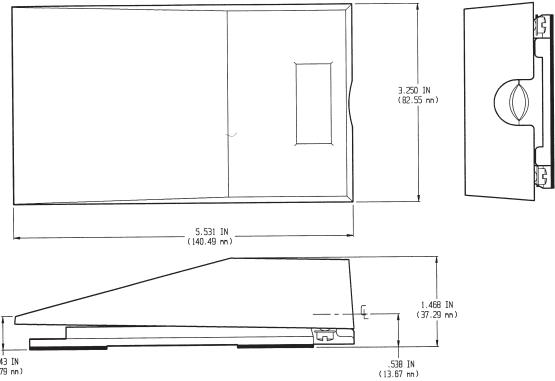

WARNING SEE PRODUCT WARNING ON PAGE 8

SPECIFICATIONS (Special variations are available to the O.E.M. on special order on the models listed below)

AGENCY APPROVALS	EN 60529 Degree of Protection	CATALOG NUMBER	DESCRIPTION	CIRCUIT	FORM	ELECTRICAL RATINGS
UL c UL us CE	IP20	121-S	Momentary	SPDT	C	20 A 125-250 VAC 1 H.P. 125-250 VAC
CSA c CSA us CE	IP20	124-S	Momentary	DPDT	C	15 A 125-250 VAC 1/2 H.P. 125-250 VAC