

A.  
System  
Overview

B1.  
Cable Ties

B2.  
Cable  
Accessories

B3.  
Stainless  
Steel Ties

C1.  
Wiring  
Duct

C2.  
Surface  
Raceway

C3.  
Abrasion  
Protection

C4.  
Cable  
Management

D1.  
Terminals

D2.  
Power  
Connectors

D3.  
Grounding  
Connectors

E1.  
Labeling  
Systems

E2.  
Labels

E3.  
Pre-Printed  
& Write-On  
Markers



E4.  
Permanent  
Identification

E5.  
Lockout/  
Tagout/  
& Safety  
Solutions


F.  
Index

## cUL® cSP® Pan-Ty® Wing Push Mount Ties – Nylon 6.6

- For indoor use
- Cable tie, mount, and fastener in a single part
- Used to attach bundles to another surface such as a flat panel
- Anchor is easily pressed into a pre-formed hole and locks in place
- Wings provide constant tension for a stable, secure, and rattle-free installation
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

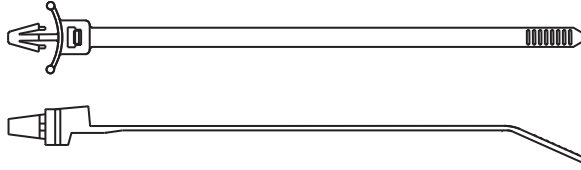

**PLWP\_SA  
Head Design**



**PLWP\_SB  
Head Design**



**PLWP\_H  
Head Design**



|                            | Length |     | Width |     | Thickness |     | Nominal Hole Dia. |     | Max. Panel Thickness |     | Max. Bundle Dia. |    | Min. Loop Tensile Str. |     | Recommended Installation Tool                          | Std. Pkg. Qty. | Std. Ctn. Qty. |
|----------------------------|--------|-----|-------|-----|-----------|-----|-------------------|-----|----------------------|-----|------------------|----|------------------------|-----|--------------------------------------------------------|----------------|----------------|
| Part Number                | In.    | mm  | In.   | mm  | In.       | mm  | In.               | mm  | In.                  | mm  | In.              | mm | Lbs.                   | N   |                                                        |                |                |
| Miniature Cross Section    |        |     |       |     |           |     |                   |     |                      |     |                  |    |                        |     |                                                        |                |                |
| PLWP1M-C                   | 4.3    | 109 | .098  | 2.5 | .044      | 1.1 | .187              | 4.7 | .093                 | 2.4 | .87              | 22 | 18                     | 80  | GTS, GTSL, GS2B, PTS, PPTS, STS2                       | 100            | 1000           |
| Intermediate Cross Section |        |     |       |     |           |     |                   |     |                      |     |                  |    |                        |     |                                                        |                |                |
| PLWP1.5I-C                 | 6.0    | 152 | .135  | 3.4 | .045      | 1.2 | .187              | 4.7 | .093                 | 2.4 | 1.25             | 32 | 40                     | 178 | GTS, GTSL, GS2B, PTS, PPTS, STS2                       | 100            | 1000           |
| Standard Cross Section     |        |     |       |     |           |     |                   |     |                      |     |                  |    |                        |     |                                                        |                |                |
| PLWP1S-C                   | 5.2    | 132 | .190  | 4.8 | .052      | 1.3 | .250              | 6.4 | .105                 | 2.7 | 1.00             | 25 | 50                     | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 100            | 1000           |
| PLWP1SA-D                  | 5.1    | 130 | .190  | 4.8 | .052      | 1.3 | .187              | 4.7 | .093                 | 2.4 | 1.00             | 25 | 50                     | 222 |                                                        | 500            | 5000           |
| PLWP1SB-D                  | 5.2    | 132 | .190  | 4.8 | .052      | 1.3 | .187              | 4.7 | .157                 | 4.0 | 1.00             | 25 | 50                     | 222 |                                                        | 500            | 5000           |
| PLWP1.5S-D                 | 6.8    | 173 | .190  | 4.8 | .052      | 1.3 | .250              | 6.4 | .105                 | 2.7 | 1.50             | 38 | 50                     | 222 |                                                        | 500            | 5000           |
| PLWP1.5SA-D                | 6.7    | 170 | .190  | 4.8 | .052      | 1.3 | .187              | 4.7 | .093                 | 2.4 | 1.50             | 38 | 50                     | 222 |                                                        | 500            | 5000           |
| PLWP2S-C                   | 7.8    | 198 | .190  | 4.8 | .052      | 1.3 | .250              | 6.4 | .105                 | 2.7 | 1.75             | 45 | 50                     | 222 |                                                        | 100            | 1000           |
| PLWP2SA-D                  | 7.7    | 196 | .190  | 4.8 | .052      | 1.3 | .187              | 4.7 | .093                 | 2.4 | 1.75             | 45 | 50                     | 222 |                                                        | 500            | 5000           |
| PLWP2SB-D                  | 7.8    | 198 | .190  | 4.8 | .052      | 1.3 | .187              | 4.7 | .157                 | 4.0 | 1.75             | 45 | 50                     | 222 |                                                        | 500            | 5000           |
| Light-Heavy Cross Section  |        |     |       |     |           |     |                   |     |                      |     |                  |    |                        |     |                                                        |                |                |
| PLWP2H-TL                  | 8.9    | 226 | .300  | 7.6 | .075      | 1.9 | .266              | 6.8 | .105                 | 2.7 | 2.00             | 51 | 120                    | 534 | GTH, GS4H, GS4EH, PTH, STH2, ST3EH                     | 250            | 2500           |
| PLWP3H-TL                  | 12.0   | 305 | .300  | 7.6 | .075      | 1.9 | .266              | 6.8 | .105                 | 2.7 | 3.00             | 76 | 120                    | 534 |                                                        | 250            | 2500           |


Note: UL Recognized and CSA Certified except PLWP2H/3H.



## Pan-Ty® Wing Push Mount Ties – Weather Resistant and Heat Stabilized Nylon 6.6

- Weather resistant material has greater resistance to damage caused by ultraviolet light – indoor or outdoor use
- Heat stabilized material for high temperature applications up to 239°F (115°C) – indoor use
- Cable tie, mount, and fastener in a single part
- Used to attach bundles to another surface such as a flat panel

- Anchor is easily pressed into a pre-formed hole and locks in place
- Wings provide constant tension for a stable, secure, and rattle-free installation
- Curved tip is easy to pick up from flat surfaces and allows faster initial threading to speed installation

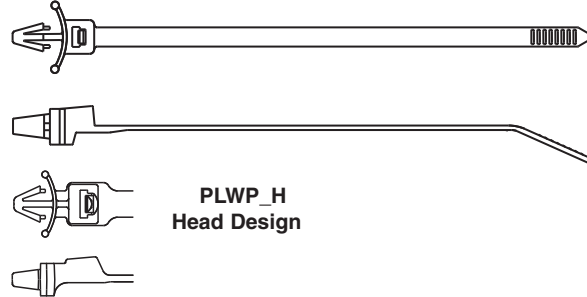

| Part Number | Length |    | Width |    | Thickness |    | Nominal Hole Dia. |    | Max. Panel Thickness |    | Max. Bundle Dia. |    | Min. Loop Tensile Str. |   | Recommended Installation Tool | Std. Pkg. Qty. | Std. Ctn. Qty. |
|-------------|--------|----|-------|----|-----------|----|-------------------|----|----------------------|----|------------------|----|------------------------|---|-------------------------------|----------------|----------------|
|             | In.    | mm | In.   | mm | In.       | mm | In.               | mm | In.                  | mm | In.              | mm | Lbs.                   | N |                               |                |                |

### Weather Resistant Nylon 6.6

#### Miniature Cross Section

|                  |     |     |      |     |      |     |      |     |      |     |     |    |    |    |                                  |     |      |
|------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|-----|----|----|----|----------------------------------|-----|------|
| <b>PLWP1M-D0</b> | 4.3 | 109 | .098 | 2.5 | .044 | 1.1 | .187 | 4.7 | .093 | 2.4 | .87 | 22 | 18 | 80 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 500 | 5000 |
|------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|-----|----|----|----|----------------------------------|-----|------|

#### Standard Cross Section

|                  |     |     |      |     |      |     |      |     |      |     |      |    |    |     |                                                        |     |      |
|------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|--------------------------------------------------------|-----|------|
| <b>PLWP1S-C0</b> | 5.2 | 132 | .190 | 4.8 | .052 | 1.3 | .250 | 6.4 | .105 | 2.7 | 1.00 | 25 | 50 | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 100 | 1000 |
| <b>PLWP2S-C0</b> | 7.8 | 198 | .190 | 4.8 | .052 | 1.3 | .250 | 6.4 | .105 | 2.7 | 1.75 | 45 | 50 | 222 |                                                        | 100 | 1000 |

#### Light-Heavy Cross Section

|                   |      |     |      |     |      |     |      |     |      |     |      |    |     |     |                                    |     |      |
|-------------------|------|-----|------|-----|------|-----|------|-----|------|-----|------|----|-----|-----|------------------------------------|-----|------|
| <b>PLWP2H-TL0</b> | 8.9  | 226 | .300 | 7.6 | .075 | 1.9 | .266 | 6.8 | .105 | 2.7 | 2.00 | 51 | 120 | 534 | GTH, GS4H, GS4EH, PTH, STH2, ST3EH | 250 | 2500 |
| <b>PLWP3H-TL0</b> | 12.0 | 305 | .300 | 7.6 | .075 | 1.9 | .266 | 6.8 | .105 | 2.7 | 3.00 | 76 | 120 | 534 |                                    | 250 | 2500 |

### Heat Stabilized Nylon 6.6

#### Miniature Cross Section

|                   |     |     |      |     |      |     |      |     |      |     |     |    |    |    |                                  |     |      |
|-------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|-----|----|----|----|----------------------------------|-----|------|
| <b>PLWP1M-D30</b> | 4.3 | 109 | .098 | 2.5 | .044 | 1.1 | .187 | 4.7 | .093 | 2.4 | .87 | 22 | 18 | 80 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 500 | 5000 |
|-------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|-----|----|----|----|----------------------------------|-----|------|

#### Intermediate Cross Section

|                     |     |     |      |     |      |     |      |     |      |     |      |    |    |     |                                  |     |      |
|---------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|----------------------------------|-----|------|
| <b>PLWP1.5I-D30</b> | 6.0 | 152 | .135 | 3.4 | .045 | 1.2 | .187 | 4.7 | .093 | 2.4 | 1.25 | 32 | 40 | 178 | GTS, GTSL, GS2B, PTS, PPTS, STS2 | 500 | 5000 |
|---------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|----------------------------------|-----|------|

#### Standard Cross Section

|                     |     |     |      |     |      |     |      |     |      |     |      |    |    |     |                                                        |     |      |
|---------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|----|-----|--------------------------------------------------------|-----|------|
| <b>PLWP1S-D30</b>   | 5.2 | 132 | .190 | 4.8 | .052 | 1.3 | .250 | 6.4 | .105 | 2.7 | 1.00 | 25 | 50 | 222 | GTS, GTSL, GS2B, GTH, GS4H, PTS, PTH, PPTS, STS2, STH2 | 500 | 5000 |
| <b>PLWP1.5S-D30</b> | 6.8 | 173 | .190 | 4.8 | .052 | 1.3 | .250 | 6.4 | .105 | 2.7 | 1.50 | 38 | 50 | 222 |                                                        | 500 | 5000 |
| <b>PLWP2S-D30</b>   | 7.8 | 198 | .190 | 4.8 | .052 | 1.3 | .250 | 6.4 | .105 | 2.7 | 1.75 | 45 | 50 | 222 |                                                        | 500 | 5000 |

#### Light-Heavy Cross Section

|                    |     |     |      |     |      |     |      |     |      |     |      |    |     |     |                                    |     |      |
|--------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|-----|-----|------------------------------------|-----|------|
| <b>PLWP2H-TL30</b> | 8.9 | 226 | .300 | 7.6 | .075 | 1.9 | .266 | 6.8 | .105 | 2.7 | 2.00 | 51 | 120 | 534 | GTH, GS4H, GS4EH, PTH, STH2, ST3EH | 250 | 2500 |
|--------------------|-----|-----|------|-----|------|-----|------|-----|------|-----|------|----|-----|-----|------------------------------------|-----|------|

Note: UL Recognized and CSA Certified except PLWP2H/3H.

A.  
System  
Overview

B1.  
Cable Ties

B2.  
Cable  
Accessories

B3.  
Stainless  
Steel Ties

C1.  
Wiring  
Duct

C2.  
Surface  
Raceway

C3.  
Abrasion  
Protection

C4.  
Cable  
Management

D1.  
Terminals

D2.  
Power  
Connectors

D3.  
Grounding  
Connectors

E1.  
Labeling  
Systems

E2.  
Labels

E3.  
Pre-Printed  
& Write-On  
Markers

E4.  
Permanent  
Identification

E5.  
Lockout/  
Tagout  
& Safety  
Solutions

F.  
Index