


7/8" Single-Ended

- Mini connector
- Gold-plated contacts
- Heavy-gauge wire


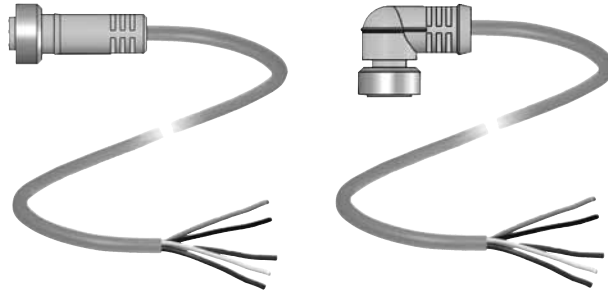


Technical Specifications

Number of poles	3	4	5
Electrical data			
Operating voltage maximum	600 V AC/DC	600 V AC/DC	600 V AC/DC
Operating current maximum	13 A	10 A	8 A
Ambient conditions			
Ambient temperature	-40 ... 105 °C for body, Information on cable quality see "Raw cable" on page 1088		
Mechanical data			
Contact elements	Spring-loaded contact sockets		
Degree of protection	IP67		
Material			
Contacts	CuZn		
Contact surface	Au		
Body	PVC, yellow		
Coupling nut	Aluminium anodized		




Dimensions

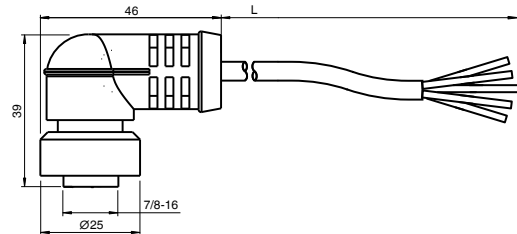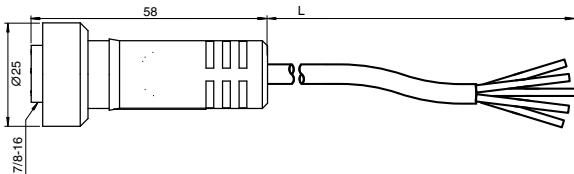

Model Number

Single-ended

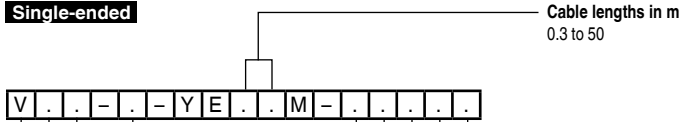

Cable lengths in m
0.3 to 50

STOOW
Cable quality
PVC, yellow (AWG16)

Orientation
G Straight
W Angled




Number of poles

- V93 3-pin
- V94 4-pin
- V95 5-pin

V93 V94 V95

- Standard, cable lengths of 2 m, 5 m and 10 m available in stock
- Available, minimum order quantity applies in some cases
- Not available

Wiring Diagrams



Subject to modifications without notice

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411
fa-info@de.pepperl-fuchs.com

Copyright Pepperl+Fuchs
Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS
SENSING YOUR NEEDS