



### Model Number


#### V15-G-BK10M-PUR-U/ABG

Female cordset, M12, 5-pin, shielded, PUR cable

### Features

- UL Recognized Component
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Flame resistant cable
- Halogen-free
- Appropriate for conveyor chains

### Dimensions

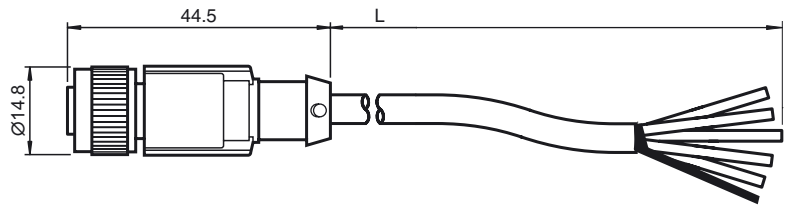

### Technical data

#### General specifications

Number of pins	5 + shield
Connection 1	female connector
Construction type 1	straight
Threading 1	M12
Connection 2	cable end

#### Electrical specifications

Operating voltage	$U_B$	max. 60 V AC/DC
Operating current		max. 4 A
Volume resistance		< 5 m $\Omega$

#### Ambient conditions

Ambient temperature	Body: -25 ... 90 °C (-13 ... 194 °F) cable, flexing: -25 ... 80 °C (-13 ... 176 °F) cable, fixed: -40 ... 80 °C (-40 ... 176 °F)
Pollution Degree	3

#### Mechanical specifications

Protection degree	IP65 / IP67 / IP69K	
Material		
Contacts	CuSn	
Contact surface	Ni/Au	
Body	TPU	
Cable	PUR	
Slotted nut	Zinc die-casting, nickel-plated	
Seal	NBR	
Core insulation	PP	
Cable	extra-fine wire, flexible	
Sheath diameter	Ø 5.9 mm	
Bending radius	> 10 x cable diameter, moving > 5 x cable diameter, fixed	
Color	black	
Cores	5 x 0.34 mm <sup>2</sup> ; 22 AWG	
Conductor construction	42 x 0.1 mm Ø	
Shield	grid Tin-plated copper wires, 85% coverage	
Length	L	10 m
Flammability		
Cable	FT2	

#### Compliance with standards and directives

Standard conformity	
Protection degree	EN 60529:2000
Standards	IEC 61076-2-101:2008

#### Approvals and certificates

UL approval	UL Recognized General purpose
-------------	-------------------------------

### Electrical connection

