


Marker for terminal blocks - UC-TM 10 CUS - 0824605

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 10.2 mm, lettering field size: 9.6 x 10.5 mm, Number of individual labels: 48



Your advantages

- ✓ The UC-TM ... UniCard labeling range includes markers for products with tall marker grooves
- ✓ The markers, which are supplied in uniform sheets, can be labeled quickly and easily using the BLUEMARK LED
- ✓ Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- ✓ The multi-section marking strips are easy to fit and can be easily separated if required
- ✓ The sheets provide space for including function texts
- ✓ The markers support multi-line labeling
- ✓ The format automatically ensures printing with a high degree of positioning accuracy



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 046356 359375 |
| GTIN | 4046356359375 |
| Weight per Piece (excluding packing) | 8.700 g |
| Custom tariff number | 49119900 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|-----------|-------|
| Width (a) | 10 mm |
|-----------|-------|

Ambient conditions

Marker for terminal blocks - UC-TM 10 CUS - 0824605

Technical data

Ambient conditions

| | |
|---------------------------------|---|
| Ambient temperature (operation) | -40 °C ... 120 °C |
| Recommended storage conditions | 23 °C/50 % relative humidity. Storage in a dry and dark place in the original packaging is recommended. |

General


| | |
|-------------------------------------|--------------------------------|
| Color | white |
| Type | high |
| Components | free from silicone and halogen |
| Material | PA |
| Wipe resistance | DIN EN 61010-1 (VDE 0411-1) |
| Number of individual labels | 48 |
| Number of individual labels per row | 6 |
| Marking mounting type | snap into tall marker groove |
| R22 | HL 1 - HL 2 |
| R23 | HL 1 - HL 2 |
| R24 | HL 1 - HL 2 |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V2 |
|--|----|

Drawings

Schematic diagram

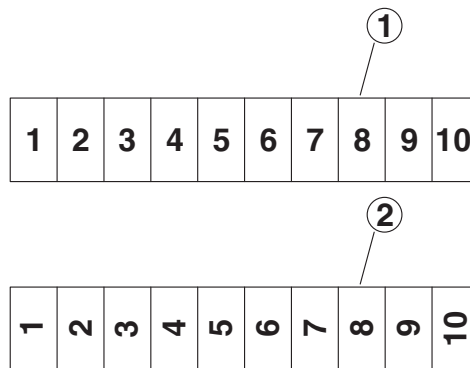

- ① Horizontal
- ② Vertical

Marker for terminal blocks - UC-TM 10 CUS - 0824605

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27141137 |
| eCl@ss 11.0 | 27281101 |
| eCl@ss 4.0 | 24190200 |
| eCl@ss 4.1 | 24190200 |
| eCl@ss 5.0 | 27141100 |
| eCl@ss 5.1 | 27141100 |
| eCl@ss 6.0 | 27141100 |
| eCl@ss 7.0 | 27141137 |
| eCl@ss 9.0 | 27141137 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000761 |
| ETIM 3.0 | EC000761 |
| ETIM 4.0 | EC000761 |
| ETIM 6.0 | EC000761 |
| ETIM 7.0 | EC000761 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39131505 |
| UNSPSC 18.0 | 39131505 |
| UNSPSC 19.0 | 39131505 |
| UNSPSC 20.0 | 39131505 |
| UNSPSC 21.0 | 39131505 |