


Wiring bridge - TMC 7 B2 80 56 C - 1022236

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus bar for TMC 72... circuit breakers (two phase) 17.8 mm pitch, up to 56 positions. Rated for 80 A (end feed) 600 V AC/DC. UL 508 Listed for connection of UL 1077 rated circuit breakers.



Key Commercial Data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 694.000 g |
| Country of origin | Germany |

Technical data

General

| | |
|-----------------------|--|
| Nominal voltage U_N | 600 V AC/DC |
| Nominal current I_N | 80 A (End feed) |
| | 160 A (Center feed with two 115 A TMC 7 B2/3TERM PIN terminals required per phase) |
| Number of positions | 56 |
| Color | gray |
| Type | Comb bridge |


Environmental Product Compliance

| | |
|------------|-------------------------|
| REACH SVHC | Lead 7439-92-1 |
| | Cadmium oxide 1306-19-0 |

Drawings

Wiring bridge - TMC 7 B2 80 56 C - 1022236

Dimensional drawing

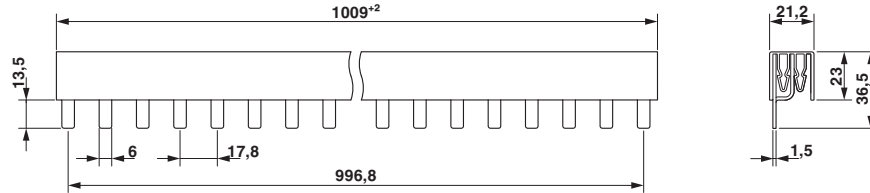

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27371306 |
| eCl@ss 11.0 | 27371306 |
| eCl@ss 9.0 | 27371306 |

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

| | | | |
|-----------|--|---|---------------|
| UL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
|-----------|--|---|---------------|

| | | | |
|------------|--|---|---------------|
| cUL Listed | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
|------------|--|---|---------------|

| | | | |
|--------------|--|--|--|
| cULus Listed | | | |
|--------------|--|--|--|

