


Wiring bridge - TMC 7 B1 80 37 CA - 1022237

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus bar for TMC 71... circuit breakers (single phase) with auxilliary switch module. 27.0 mm pitch, up to 37 positions. Rated for 80 A (end feed) 600 V AC/1000 V DC. UL508 Listed for connection of UL1077 rated circuit breakers.

Image shows ...C version



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	340.000 g
Country of origin	Germany

Technical data

General

Nominal voltage U_N	600 V AC (1000 V DC)
Nominal current I_N	80 A (End feed)
	160 A (Center feed with two 115 A TMC 7 B TERM PIN terminals required per phase)
Number of positions	37
Color	gray
Type	Comb bridge


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
	Cadmium oxide 1306-19-0

Drawings

Wiring bridge - TMC 7 B1 80 37 CA - 1022237

Dimensional drawing

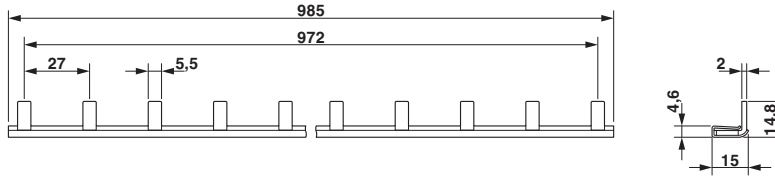

Classifications

eCl@ss

eCl@ss 10.0.1	27371306
eCl@ss 11.0	27371306
eCl@ss 9.0	27371306

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
-----------	--	---	---------------

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
------------	--	---	---------------

cULus Listed			
--------------	--	--	--