


PCB terminal block - MKDSN 2,5/ 4 HT BK R44 - 1050595

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB terminal block, Number of positions per row: 4, product range: MKDSN 2,5/..-HT, pitch: 5 mm, screw head form: H1L Philipps recess with slotted Torx, color: black, Solder pin [P]: 3.5 mm, type of packaging: 44 mm wide tape

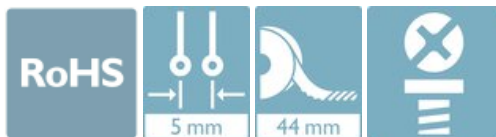

Key Commercial Data

Packing unit	1 pc
Minimum order quantity	140 pc
GTIN	 4 0 5 5 6 2 6 6 6 9 3 1 1
GTIN	4055626669311
Custom tariff number	85369010
Country of origin	Germany

Technical data

Product type	Printed circuit board terminal
Approval	VDE report with production monitoring
	IECEE CB Scheme
	SEV
	EAC
	cULus Recognized
Number of positions	4
Pitch	5 mm
Product family	MKDSN 2,5/..-HT
Color	black (9005)
Packaging	44 mm wide tape
Height	15 mm

PCB terminal block - MKDSN 2,5/ 4 HT BK R44 - 1050595

Classifications

eCl@ss

eCl@ss 10.0.1	27440401
eCl@ss 11.0	27460101
eCl@ss 5.1	27261100
eCl@ss 6.0	27261100
eCl@ss 7.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 6.0	EC002643
ETIM 7.0	EC002643

Approvals

Approvals

Approvals

VDE Gutachten mit Fertigungsüberwachung / IECEx CB Scheme / SEV / EAC / cULus Recognized

Ex Approvals

Approval details

VDE Gutachten mit Fertigungsüberwachung		http://www2.vde.com/de/Institut/Online-Service/ VDE-gepruefteProdukte/Seiten/Online-Suche.aspx	40018557
Nominal voltage UN	250 V		
Nominal current IN	24 A		
mm²/AWG/kcmil	0.2-2.5		

IECEE CB Scheme		http://www.iecee.org/	DE1-58859
Nominal voltage UN	250 V		
Nominal current IN	24 A		

PCB terminal block - MKDSN 2,5/ 4 HT BK R44 - 1050595

Approvals

mm²/AWG/kcmil	0.2-2.5

SEV		https://www.eurofins.ch/de/	IK-4486-A1
Nominal voltage UN		250 V	
Nominal current IN		24 A	
mm²/AWG/kcmil		2.5	

EAC		B.01687
-----	---	---------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-19770427
	B	D	
Nominal voltage UN	300 V	150 V	
Nominal current IN	20 A	15 A	
mm²/AWG/kcmil	30-12	30-12	