

Sensor/actuator cable - SAC-8P-M12MR/40,0-680 FDP - 1095804


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/actuator cable, 8-position, PVC, gray, shielded, Plug angled M12, coding: A, on free cable end, cable length: 40 m, Foil shielding plus drain wire



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 927558
GTIN	4055626927558
Country of origin	United States

Technical data

Dimensions

Length of cable	40 m
-----------------	------

Ambient conditions

Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-25 °C ... 90 °C (Plug / socket)
Degree of protection	IP65
	IP67
	IP68

General

Rated current at 40°C	2 A
Rated voltage	30 V AC
	30 V DC
Number of positions	8

Sensor/actuator cable - SAC-8P-M12MR/40,0-680 FDP - 1095804

Technical data

General

Insulation resistance	≥ 100 MΩ
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
Status display	No
Protective circuit/component	unwired
Overvoltage category	II
Degree of pollution	3
Insertion/withdrawal cycles	≥ 100
Torque	0.4 Nm (M12 connector)

Material

Flammability rating according to UL 94	HB
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, nickel-plated

Standards and Regulations

Standards/specifications	M12 connector IEC 61076-2-101
Flammability rating according to UL 94	HB

Cable

Cable type	PVC, gray, 105°C
Cable type (abbreviation)	680
UL AWM style	2517 (105 °C / 300 V)
AWG signal line	24
Core diameter including insulation	1.12 mm ±0.03 mm
Wire colors	white, brown, green, yellow, gray, pink, blue
Type of pair shielding	Plastic-coated aluminum foil, aluminum side inside
Overall twist	Conductors, fillers, and drain wire are twisted with left-hand lay
Shielding	Plastic-coated aluminum foil connection with a drain wire
External sheath, color	gray
External cable diameter D	5.11 mm ±0.2 mm
Minimum bending radius, flexible installation	8 x D
Cable weight	40.55 kg/km
Outer sheath, material	PVC
Material conductor insulation	PVC (Signal line)
Conductor material	Tin-plated Cu litz wires

Sensor/actuator cable - SAC-8P-M12MR/40,0-680 FDP - 1095804

Technical data

Cable


Insulation resistance	≥ (550 M Ohms/m @ 500V)
Conductor resistance	max. 80.2 Ω/km (20 °C)
Nominal voltage, cable	300 V
Other resistance	UV resistant
Flame resistance	FT4
Ambient temperature (operation)	-30 °C ... 105 °C (cable, fixed installation)

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------


Drawings

Schematic diagram




Pin assignment M12 plug, 8-pos., A-coded, view plug side

Circuit diagram

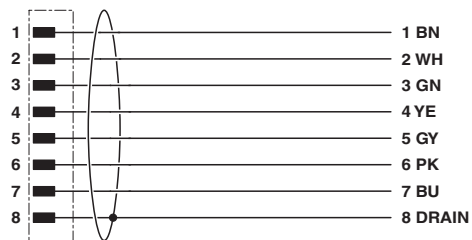

Contact assignment of the M12 plug and the M12 socket


Dimensional drawing



M12 x 1 male plug, angled

Sensor/actuator cable - SAC-8P-M12MR/40,0-680 FDP - 1095804

Cable cross section

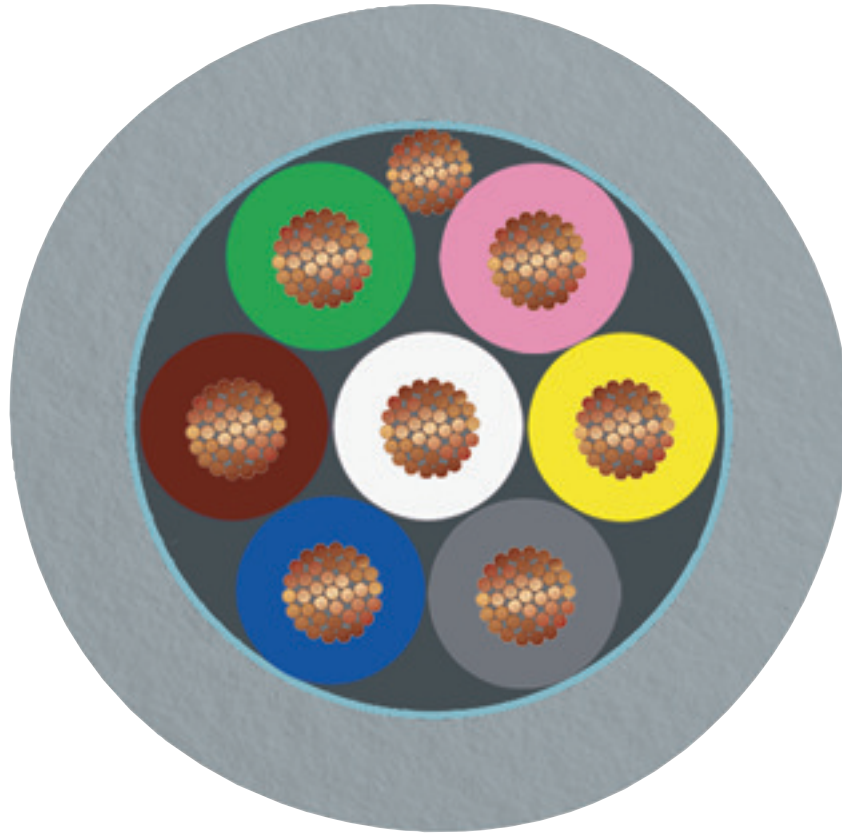

Classifications

eCl@ss

eCl@ss 10.0.1	27060311
eCl@ss 11.0	27060311
eCl@ss 9.0	27060311

Approvals

Approvals

Sensor/actuator cable - SAC-8P-M12MR/40,0-680 FDP - 1095804


Approvals


Approvals


UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm	FILE E 221474
Nominal voltage UN		30 V	
Nominal current IN		2 A	

cUL Listed		http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm	FILE E 221474
Nominal voltage UN		30 V	
Nominal current IN		2 A	

cULus Listed			
--------------	-------------------------------------------------------------------------------------	--	--