

## PCB terminal block - MKDS 1/12-3,81 - 1727117

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB terminal block, nominal current: 13.5 A, rated voltage (III/2): 200 V, pitch: 3.81 mm, number of positions: 12, connection method: Screw connection with tension sleeve, mounting: Wave soldering, conductor/PCB connection direction: 0 °, color: green, Solder pin [P]: 3.5 mm



The figure shows a 10-position version of the product

### Your advantages

- ✓ Well-known connection principle allows worldwide use
- ✓ Low temperature rise, thanks to maximum contact force
- ✓ Allows connection of two conductors
- ✓ Extremely small design for the respective conductor cross section



### Key Commercial Data

|                                      |                                                                                      |
|--------------------------------------|--------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                 |
| Minimum order quantity               | 50 pc                                                                                |
| GTIN                                 |  |
| GTIN                                 | 4017918025588                                                                        |
| Weight per Piece (excluding packing) | 6.310 g                                                                              |
| Custom tariff number                 | 85369010                                                                             |
| Country of origin                    | Germany                                                                              |

### Technical data

#### Item properties

|                           |                    |
|---------------------------|--------------------|
| Brief article description | PCB terminal block |
| Range of articles         | MKDS 1             |
| Pitch                     | 3.81 mm            |
| Number of positions       | 12                 |

# PCB terminal block - MKDS 1/12-3,81 - 1727117

## Technical data

### Item properties

|                       |                                      |
|-----------------------|--------------------------------------|
| Connection method     | Screw connection with tension sleeve |
| Drive form screw head | Slotted (L)                          |
| Screw thread          | M2                                   |
| Mounting type         | Wave soldering                       |
| Pin layout            | Linear pinning                       |
| Number of levels      | 1                                    |
| Number of connections | 12                                   |
| Number of potentials  | 12                                   |

### Connection capacity

|                                                                       |                       |
|-----------------------------------------------------------------------|-----------------------|
| Conductor cross section solid                                         | 0.14 mm² ... 1.5 mm²  |
| Conductor cross section flexible                                      | 0.14 mm² ... 1.5 mm²  |
| Conductor cross section AWG / kcmil                                   | 26 ... 16             |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.25 mm² ... 0.5 mm²  |
| Conductor cross section, flexible, with ferrule, with plastic sleeve  | 0.25 mm² ... 0.5 mm²  |
| 2 conductors with same cross section, solid                           | 0.14 mm² ... 0.5 mm²  |
| 2 conductors with same cross section, flexible                        | 0.14 mm² ... 0.34 mm² |
| Cylindrical gauge a x b / diameter                                    | - / 1.6 mm            |
| Stripping length                                                      | 5 mm                  |
| Torque                                                                | 0.22 Nm ... 0.25 Nm   |

### Material data - contact

|                                             |                                                                                   |
|---------------------------------------------|-----------------------------------------------------------------------------------|
| Note                                        | WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/ JEDEC JESD 201 |
| Contact material                            | Cu alloy                                                                          |
| Surface characteristics                     | Tin-plated                                                                        |
| Metal surface terminal point (top layer)    | Tin (5 - 7 µm Sn)                                                                 |
| Metal surface terminal point (middle layer) | Nickel (2 - 3 µm Ni)                                                              |
| Metal surface soldering area (top layer)    | Tin (5 - 7 µm Sn)                                                                 |
| Metal surface soldering area (middle layer) | Nickel (2 - 3 µm Ni)                                                              |

### Material data - housing

|                                                                   |        |
|-------------------------------------------------------------------|--------|
| Insulating material                                               | PA     |
| Insulating material group                                         | I      |
| CTI according to IEC 60112                                        | 600    |
| Flammability rating according to UL 94                            | V0     |
| Glow wire flammability index GWFI according to EN 60695-2-12      | 850    |
| Glow wire ignition temperature GWIT according to EN 60695-2-13    | 775    |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C |

# PCB terminal block - MKDS 1/12-3,81 - 1727117

## Technical data

### Dimensions for the product

|                             |                                                                                                         |
|-----------------------------|---------------------------------------------------------------------------------------------------------|
| Caption                     | Schematic representation – for additional information, see product range drawing in the Download Center |
| Length [ l ]                | 7.3 mm                                                                                                  |
| Width [ w ]                 | 45.71 mm                                                                                                |
| Height [ h ]                | 12 mm                                                                                                   |
| Pitch                       | 3.81 mm                                                                                                 |
| Height (without solder pin) | 8.5 mm                                                                                                  |
| Solder pin [P]              | 3.5 mm                                                                                                  |
| Pin dimensions              | 0.5 x 0.9 mm                                                                                            |
| Dimension a                 | 41.91 mm                                                                                                |

### Dimensions for PCB design

|               |        |
|---------------|--------|
| Hole diameter | 1.1 mm |
|---------------|--------|

### Packaging information

|                            |                     |
|----------------------------|---------------------|
| Type of packaging          | packed in cardboard |
| Pieces per package         | 50                  |
| Denomination packing units | Pcs.                |

### General product information

|              |                                                                                                                                                                                                                                                                                                                                                                    |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type of note | Note on application                                                                                                                                                                                                                                                                                                                                                |
| Note         | For safe conductor connection, always adhere to a defined tightening torque. Particularly in the case of PCB terminal blocks with two or three positions, the individual solder pin for each contact point cannot compensate for this. That is why the terminal blocks must be supported during conductor connection (held with one hand, support on the housing). |

### Ambient conditions

|                                         |                                                                               |
|-----------------------------------------|-------------------------------------------------------------------------------|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C                                                              |
| Ambient temperature (assembly)          | -5 °C ... 100 °C                                                              |
| Ambient temperature (operation)         | -40 °C ... 100 °C (Depending on the current carrying capacity/derating curve) |

### Termination and connection method

|                                          |                       |
|------------------------------------------|-----------------------|
| Connection test                          | IEC 60998-2-2:2002-12 |
| Test for conductor damage and slackening | IEC 60998-2-1:2002-12 |
|                                          | Test passed           |

### Pull-out test

|                                                          |                              |
|----------------------------------------------------------|------------------------------|
| Pull-out test                                            | IEC 60998-2-1:2002-12        |
|                                                          | Test passed                  |
| Conductor cross section / conductor type / tensile force | 0.14 mm² / solid / > 10 N    |
|                                                          | 0.14 mm² / flexible / > 10 N |

# PCB terminal block - MKDS 1/12-3,81 - 1727117

## Technical data

### Pull-out test

|  |                                         |
|--|-----------------------------------------|
|  | 1.5 mm <sup>2</sup> / solid / > 40 N    |
|  | 1.5 mm <sup>2</sup> / flexible / > 40 N |

### Electrical tests

|                             |                     |
|-----------------------------|---------------------|
| Rated current               | 13.5 A              |
| Conductor cross section     | 1.5 mm <sup>2</sup> |
| Rated voltage (III/2)       | 200 V               |
| Rated surge voltage (III/2) | 2.5 kV              |

### Air clearances and creepage distances

|                                                 |                                                          |
|-------------------------------------------------|----------------------------------------------------------|
| Specification                                   | IEC 60664-1:1992-10 + A1:2000-02 + A2:2002-05            |
| Rated insulation voltage (III/3)                | 160 V                                                    |
| Rated insulation voltage (III/2)                | 200 V                                                    |
| Rated insulation voltage (II/2)                 | 400 V                                                    |
| Rated surge voltage (III/3)                     | 2.5 kV                                                   |
| Rated surge voltage (III/2)                     | 2.5 kV                                                   |
| Rated surge voltage (II/2)                      | 2.5 kV                                                   |
| Minimum clearance - inhomogeneous field (III/3) | 1.5 mm                                                   |
| Minimum clearance - inhomogeneous field (III/2) | 1.5 mm                                                   |
| Minimum clearance - inhomogeneous field (II/2)  | 1.5 mm                                                   |
| Minimum creepage distance value (III/3)         | 2 mm                                                     |
| Minimum creepage distance value (III/2)         | 1 mm                                                     |
| Minimum creepage distance value (II/2)          | 2 mm                                                     |
| Note on connection cross section                | With connected conductor 1.5 mm <sup>2</sup> (stranded). |

### Current carrying capacity / derating curves

### Vibration test

|                        |                        |
|------------------------|------------------------|
| Specification          | IEC 60068-2-6:1995-03  |
| Result                 | Test passed            |
| Frequency              | 10 - 150 - 10 Hz       |
| Sweep speed            | 1 octave/min           |
| Amplitude              | 0.35 mm (10 - 60.1 Hz) |
| Acceleration           | 5 g (60.1 - 150 Hz)    |
| Test duration per axis | 2.5 h                  |

### Resistance to ageing, humidity and penetration of solids

|            |                 |
|------------|-----------------|
| Dry heat   | 168 h/100°C     |
| Humid heat | 48 h/30 °C/92 % |

### Standards and Regulations

PCB terminal block - MKDS 1/12-3,81 - 1727117

Technical data

Standards and Regulations


|                                        |        |
|----------------------------------------|--------|
| Connection in acc. with standard       | EN-VDE |
|                                        | CSA    |
| Flammability rating according to UL 94 | V0     |

Environmental Product Compliance

|            |                                                                                                     |
|------------|-----------------------------------------------------------------------------------------------------|
|            | Lead 7439-92-1                                                                                      |
| China RoHS | Environmentally Friendly Use Period = 50                                                            |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


Drawings

Drilling diagram

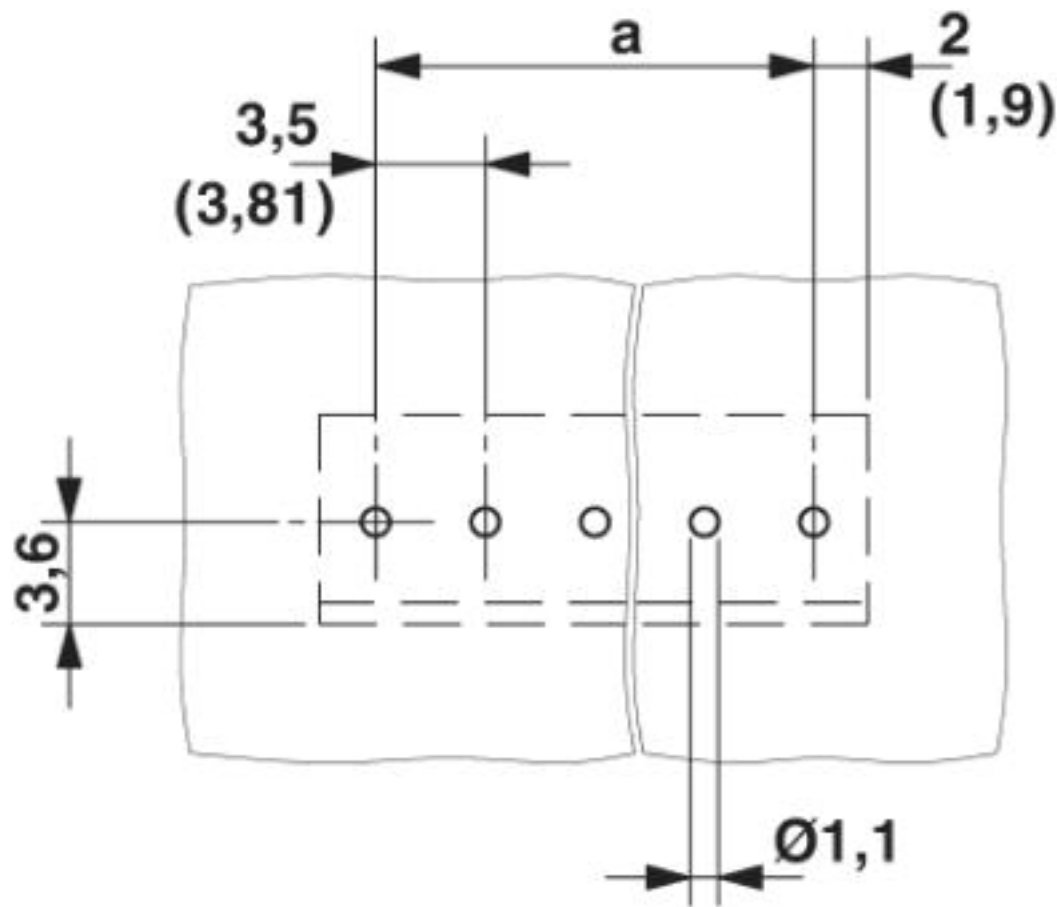


## PCB terminal block - MKDS 1/12-3,81 - 1727117

Diagram

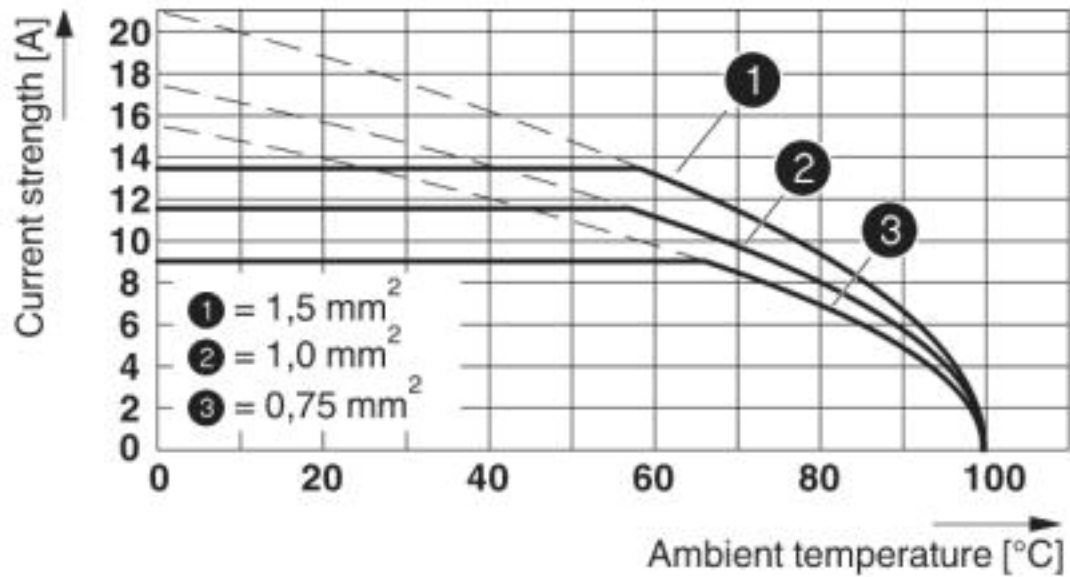

Type: MKDS 1/...-3,81  
 Tested according to DIN EN 60512-5-2:2003-01  
 Reduction factor = 1  
 Number of positions = 5

Dimensional drawing

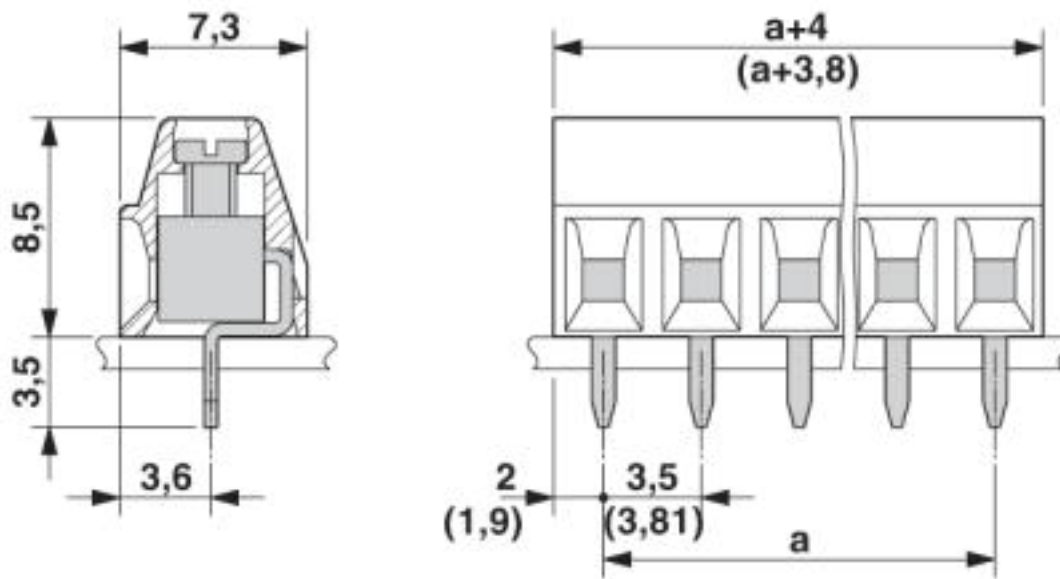

## PCB terminal block - MKDS 1/12-3,81 - 1727117

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141100 |
| eCl@ss 4.1 | 27141100 |
| eCl@ss 5.0 | 27141100 |
| eCl@ss 5.1 | 27261100 |
| eCl@ss 6.0 | 27261100 |
| eCl@ss 7.0 | 27440401 |
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC002643 |
| ETIM 5.0 | EC002643 |
| ETIM 6.0 | EC002643 |
| ETIM 7.0 | EC002643 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211801 |
| UNSPSC 7.0901 | 39121432 |
| UNSPSC 11     | 39121432 |
| UNSPSC 12.01  | 39121432 |
| UNSPSC 13.2   | 39121432 |

### Approvals

#### Approvals

---

#### Approvals

IECEE CB Scheme / SEV / EAC / cULus Recognized

---

#### Ex Approvals

---

#### Approval details

## PCB terminal block - MKDS 1/12-3,81 - 1727117

### Approvals

|                    |                     |                                                           |         |
|--------------------|---------------------|-----------------------------------------------------------|---------|
| IECEE CB Scheme    | <b>CB</b><br>scheme | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | CH-8225 |
| Nominal voltage UN | 125 V               |                                                           |         |
| Nominal current IN | 12 A                |                                                           |         |
| mm²/AWG/kcmil      | 1.5                 |                                                           |         |

|                    |                                                                                   |                                                                                                                                                     |            |
|--------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| SEV                |  | <a href="https://www.electrosuisse.ch/de/meta/shop/produktezertifikate.html">https://www.electrosuisse.ch/de/meta/shop/produktezertifikate.html</a> | IK-3542-M1 |
| Nominal voltage UN | 125 V                                                                             |                                                                                                                                                     |            |
| Nominal current IN | 12 A                                                                              |                                                                                                                                                     |            |
| mm²/AWG/kcmil      | 1.5                                                                               |                                                                                                                                                     |            |

|     |                                                                                     |         |  |
|-----|-------------------------------------------------------------------------------------|---------|--|
| EAC |  | B.01742 |  |
|-----|-------------------------------------------------------------------------------------|---------|--|

|                    |                                                                                     |                                                                                                                                                       |                 |
|--------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19770427 |
|                    | B                                                                                   | D                                                                                                                                                     |                 |
| Nominal voltage UN | 300 V                                                                               | 300 V                                                                                                                                                 |                 |
| Nominal current IN | 10 A                                                                                | 10 A                                                                                                                                                  |                 |
| mm²/AWG/kcmil      | 30-16                                                                               | 30-16                                                                                                                                                 |                 |

### Accessories

#### Accessories

#### Labeled terminal marker

Marker card - SK 3,81/2,8:FORTL.ZAHLEN - 0804109



Marker card, Card, white, labeled, Horizontal: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... (99)100, mounting type: adhesive, for terminal block width: 3.81 mm, lettering field size: 3.81 x 2.8 mm

## PCB terminal block - MKDS 1/12-3,81 - 1727117

### Accessories

---

#### Marker pen

Marker pen - B-STIFT - 1051993



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

---

#### Screwdriver tools

Screwdriver - SZS 0,4X2,5 VDE - 1205037



Screwdriver, slot-headed, VDE insulated, size: 0.4 x 2.5 x 80 mm, 2-component grip, with non-slip grip

---