

Acoustic element - PSD-S AE BM2-1 85DB - 2700136

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Buzzer element, continuous/pulse tone, 24 V AC/DC, max. 85 dB(A), black

Your advantages

- Multi-tone siren signaling depending on the situation
- Tone function can be set via DIP switches



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 491280
GTIN	4046356491280
Weight per Piece (excluding packing)	100.000 g
Custom tariff number	85318070
Country of origin	Germany

Technical data

Dimensions

Diameter	70 mm
Height	72 mm

Ambient conditions

Ambient temperature (operation)	-30 °C ... 50 °C
Degree of protection	IP65, when installed

General

Material	Polycarbonate PC
----------	------------------

Acoustic element - PSD-S AE BM2-1 85DB - 2700136

Technical data

General

Color	black
Weight	73 g
Mounting position	any

Electrical data

Input voltage	24 V AC/DC ± 10 %
Nominal input voltage range	21.6 V AC/DC ... 26.4 V AC/DC
Maximum inrush current	max. 200 mA
Current consumption	25 mA
Service life, electrical	min. 5,000 h
Operating time	100 %
Type of acoustic signal	Continuous/pulse tone
Signal frequency	approx. 1 Hz
Tone frequency	approx. 3.5 kHz
Volume	85

Approvals / conformities

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Acoustic element - PSD-S AE BM2-1 85DB - 2700136

Dimensional drawing

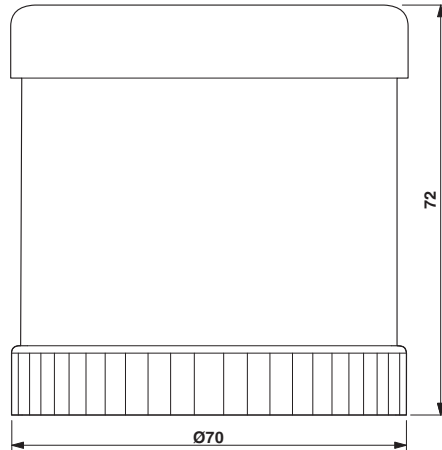

Classifications

eCl@ss

eCl@ss 10.0.1	27371214
eCl@ss 11.0	27371214
eCl@ss 4.0	27240200
eCl@ss 4.1	27240200
eCl@ss 5.0	27371200
eCl@ss 5.1	27371200
eCl@ss 6.0	27371200
eCl@ss 7.0	27371214
eCl@ss 9.0	27371214

ETIM

ETIM 3.0	EC001026
ETIM 4.0	EC001026
ETIM 6.0	EC001026
ETIM 7.0	EC001026

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	39121311
UNSPSC 12.01	39121311
UNSPSC 13.2	39121311

Acoustic element - PSD-S AE BM2-1 85DB - 2700136

Approvals

Approvals

Approvals

UL Listed / cUL Listed / EAC / EAC / UL Listed / cUL Listed / EAC / EAC

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
EAC			EAC-Zulassung
EAC			EAC-Zulassung
UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
EAC			RU *- DE.A*30.B.00237

Acoustic element - PSD-S AE BM2-1 85DB - 2700136

Approvals

EAC



RU *-
DE.A*30.B.00237