

Acoustic element - PSD-S AE SM7-4 100DB/3 - 2700141

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Siren element, 7 tones, 24 V DC, max. 100 dB(A), tone range over 3 signal lines, black

Your advantages

- Multi-tone siren signaling depending on the situation
- Remote control of tone selection via three signal cables
- Adjustable volume
- Minimum volume of 86 dB(A)



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 491334
GTIN	4046356491334
Weight per Piece (excluding packing)	80.000 g
Custom tariff number	85318070
Country of origin	Germany

Technical data

Dimensions

Diameter	70 mm
Height	72 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 50 °C
Degree of protection	IP65, when installed

Acoustic element - PSD-S AE SM7-4 100DB/3 - 2700141

Technical data

General

Material	Polycarbonate PC
Color	black
Weight	80 g
Mounting position	any

Electrical data

Input voltage	24 V DC \pm 10 %
Nominal input voltage range	21.6 V DC ... 26.4 V DC
Maximum inrush current	max. 500 mA
Current consumption	80 mA
Service life, electrical	min. 5,000 h
Operating time	100 %
Type of acoustic signal	7 tones, remotely controlled
Signal frequency	approx. 1 Hz (Pulse tone)
	approx. 20 Hz (Trill tone)
	approx. 420 Hz (Hum tone)
Tone frequency	approx. 1.6 kHz
	approx. 3.4 kHz
Volume	max. 100 (for continuous and pulse tone of 3.4 kHz)

Approvals / conformities

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Acoustic element - PSD-S AE SM7-4 100DB/3 - 2700141

Dimensional drawing

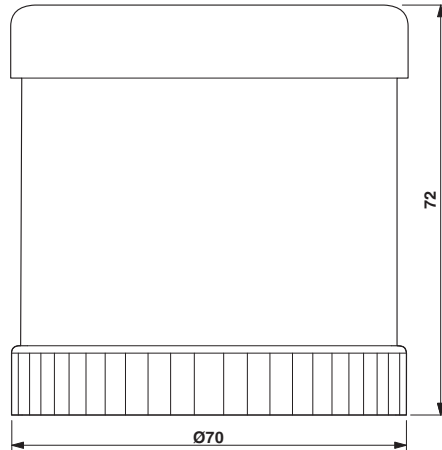

Classifications

eCl@ss

eCl@ss 10.0.1	27371214
eCl@ss 11.0	27371214
eCl@ss 4.0	27240200
eCl@ss 4.1	27240200
eCl@ss 5.0	27371200
eCl@ss 5.1	27371200
eCl@ss 6.0	27371200
eCl@ss 7.0	27371214
eCl@ss 9.0	27371214

ETIM

ETIM 3.0	EC001026
ETIM 4.0	EC001026
ETIM 6.0	EC001026
ETIM 7.0	EC001026

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	39121311
UNSPSC 12.01	39121311
UNSPSC 13.2	39121311

Acoustic element - PSD-S AE SM7-4 100DB/3 - 2700141

Approvals


Approvals


Approvals

UL Listed / cUL Listed / EAC / EAC / cULus Listed


Ex Approvals


Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
-----------	---	---	---------------

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 123528
------------	--	---	---------------

EAC			EAC-Zulassung
-----	---	--	---------------

EAC			RU *- DE.A*30.B.00237
-----	---	--	--------------------------

cULus Listed			
--------------	---	--	--
