

## Relay Module - PR2-RSC3-LDP-24DC/4X21AU - 2834724

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Pre-assembled relay modules with screw connection, consisting of: relay base, industrial relay with integrated LED, freewheeling diode and engage/disengage manual actuate lever, and retaining bracket. Input voltage: 24 V DC, 4 changeover contacts with gold-plated contacts, 5 A

The figure shows the 24 V DC version

### Your advantages

- With DC types, freewheeling diode is integrated in relay
- Relay with detectable manual operation and status LED
- Mechanical switch position indicator
- 4-changeover contact types with multi-layer gold contacts
- Logical contact arrangement thanks to 1/3-level relay base



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	5 pc
GTIN	 4 046356 044554
GTIN	4046356044554
Weight per Piece (excluding packing)	115.680 g
Custom tariff number	85364900
Country of origin	Japan

### Technical data

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

# Relay Module - PR2-RSC3-LDP-24DC/4X21AU - 2834724

## Technical data

### Coil side

Nominal input voltage $U_N$	24 V DC
Input voltage range in reference to $U_N$	see diagram
Typical input current at $U_N$	38 mA
Typical response time	13 ms
Typical release time	14 ms
Protective circuit	Damping diode
Operating voltage display	Green LED
Power dissipation for nominal condition	0.91 W

### Contact side

Contact type	4 changeover contacts
Type of switch contact	Single contact
Contact material	AgNi, hard gold-plated
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	1 V
Min. switching current	1 mA
Maximum inrush current	12 A (15 ms)
Limiting continuous current	5 A
Interrupting rating (ohmic load) max.	1250 VA (for 250 V AC)
	120 W (at 24 V DC)
	110 W (at 48 V DC)
	78 W (at 60 V DC)
	55 W (at 110 V DC)
	77 W (at 220 V DC)

### General

Test voltage	2 kV AC (50 Hz, 1 min., winding/contact)
	2 kV AC (50 Hz, 1 min., contact/contact)
Operating mode	100% operating factor
Mechanical service life	$5 \times 10^7$ cycles
Service life, electrical	see diagram
Mounting position	any
Assembly instructions	In rows with zero spacing

### Connection data input side

Connection name	Coil side
Connection method	Screw connection
Stripping length	7 mm
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>

## Relay Module - PR2-RSC3-LDP-24DC/4X21AU - 2834724

### Technical data

#### Connection data input side

Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 14

#### Connection data output side

Connection name	Contact side
Connection method	Screw connection
Stripping length	7 mm
Conductor cross section solid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section AWG	26 ... 14

#### Standards and Regulations


Standards/regulations	IEC 60664
	EN 50178
Pollution degree	2
Overvoltage category	II

#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values


### Drawings

Circuit diagram



DC coils


Diagram

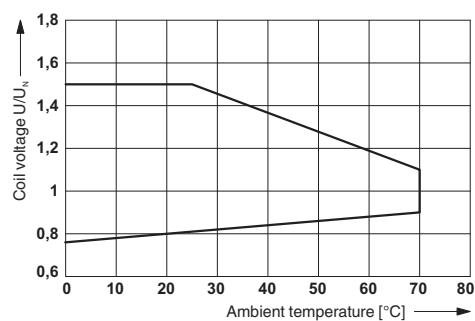

Operating voltage range of relay  $T_u = T_{coil}$


## Relay Module - PR2-RSC3-LDP-24DC/4X21AU - 2834724

Diagram

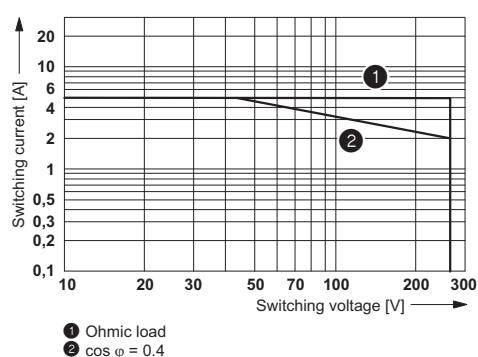


AC interrupting rating

Diagram

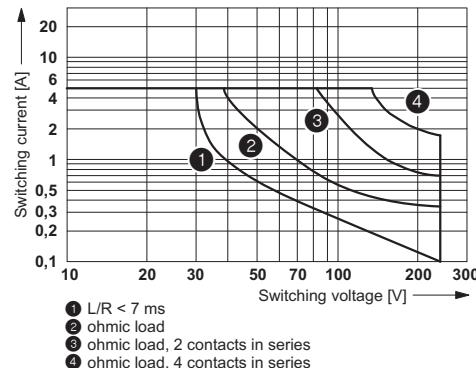

DC interrupting rating

Diagram

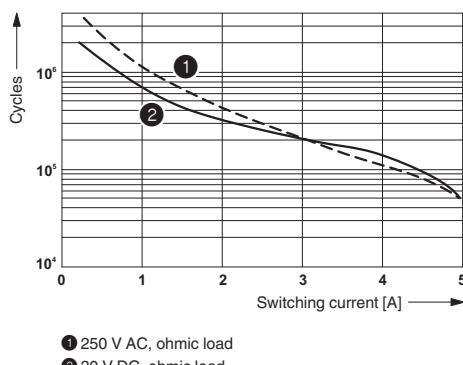

Electrical service life

### Articles in set

Relay base - PR2-BSC3/4X21 - 2833576



Relay base PR2-B, for industrial relay REL-IR with 2 or 4 changeover contacts, 1/3-level design, screw connection, plug-in option for input/interference suppression modules, for mounting on NS 35/7,5

## Relay Module - PR2-RSC3-LDP-24DC/4X21AU - 2834724

### Articles in set

Single relay - REL-IR/LDP- 24DC/4X21AU - 2834096



Plug-in industrial relay with power contacts and additional hard gold plating, 4 changeover contacts, test button, status LED, freewheeling diode, mechanical switching position indicator, polarity: A1+, A2-, coil voltage: 24 V DC

---

Retaining bracket - EL2-P35 - 2833592



Relay retaining bracket, with eject function and integrated equipment marking area (8 x 25 mm), to suit relay base PR2, for 35 mm high industrial relay

---

Marker labels - MP 2 - 2833644



Equipment marker, labeling surface 9 x 25 mm

---

### Classifications

eCl@ss

eCl@ss 4.0	27371100
eCl@ss 4.1	27371100
eCl@ss 5.0	27371600
eCl@ss 5.1	27371600
eCl@ss 6.0	27371600
eCl@ss 7.0	27371601
eCl@ss 9.0	27371601

ETIM

ETIM 2.0	EC001437
ETIM 3.0	EC001437
ETIM 4.0	EC001437
ETIM 6.0	EC001437

## Relay Module - PR2-RSC3-LDP-24DC/4X21AU - 2834724

### Classifications

#### ETIM

ETIM 7.0	EC001437
----------	----------

#### UNSPSC

UNSPSC 6.01	30211916
UNSPSC 7.0901	39121515
UNSPSC 11	39121515
UNSPSC 12.01	39121515
UNSPSC 13.2	39122334
UNSPSC 18.0	39122334
UNSPSC 19.0	39122334
UNSPSC 20.0	39122334
UNSPSC 21.0	39122334