

DC/DC converters - MINI-PS- 12- 24DC/24DC/1 - 2866284

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Primary-switched MINI DC/DC converter for DIN rail mounting, input: 12 - 24 V DC, output: 24 V DC/1 A

Product Description

MINI DC/DC converter for MCR technology.


DC/DC converters alter the voltage level, regenerate the voltage at the end of long cables or enable the creation of independent supply systems by means of electrical isolation.

Your advantages

- ✓ Electrical isolation: for setting up independent supply systems
- ✓ Support conversion to various voltage levels
- ✓ Constant voltage: output voltage regenerated even at the end of long cables



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 960902 |
| GTIN | 4017918960902 |
| Weight per Piece (excluding packing) | 240.000 g |
| Custom tariff number | 85044030 |
| Country of origin | China |

Technical data

Dimensions

| | |
|--------|---------|
| Width | 22.5 mm |
| Height | 99 mm |
| Depth | 107 mm |

DC/DC converters - MINI-PS- 12- 24DC/24DC/1 - 2866284

Technical data

Dimensions

| | |
|----------------------------------|---|
| Installation distance right/left | 0 mm / 0 mm ($\leq 70\text{ }^{\circ}\text{C}$) |
| Installation distance top/bottom | 50 mm / 50 mm ($\leq 70\text{ }^{\circ}\text{C}$) |

Ambient conditions

| | |
|--|--|
| Degree of protection | IP20 |
| Ambient temperature (operation) | -25 °C ... 70 °C (> 60 °C Derating: 2.5 %/K) |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Max. permissible relative humidity (operation) | $\leq 95\%$ (at 25 °C, non-condensing) |

Input data

| | |
|-----------------------------|---|
| Nominal input voltage range | 12 V DC ... 24 V DC |
| Input voltage range | 10 V DC ... 32 V DC |
| Frequency range DC | 0 Hz |
| Current consumption | 2.6 A (12 V DC) 1.3 A (24 V DC) |
| Inrush current | < 15 A (typical) |
| Mains buffering time | typ. 3 ms (12 V DC) typ. 20 ms (24 V DC) |
| Input fuse | 6.3 A (slow-blow, internal) |

Output data

| | |
|---|---|
| Nominal output voltage | 24 V DC $\pm 1\%$ |
| Setting range of the output voltage (U_{Set}) | 22.5 V DC ... 28.5 V DC (> 24 V DC, constant capacity restricted) |
| Nominal output current (I_N) | 1 A (-25 °C ... 60 °C) |
| Derating | 60 °C ... 70 °C (2.5%/K) |
| Connection in parallel | Yes, for assembling redundant systems and increasing efficiency |
| Connection in series | yes |
| Residual ripple | < 30 mV _{PP} (20 MHz) |
| Output power | 24 W |
| Typical response time | < 0.5 s |
| Peak switching voltages nominal load | < 100 mV _{PP} (20 MHz) |
| Maximum power dissipation in no-load condition | < 1.2 W |
| Power loss nominal load max. | < 5 W |

General

| | |
|---------------------------|--|
| Net weight | 0.2 kg |
| Operating voltage display | Green LED |
| Efficiency | > 83 % (at 24 V DC and nominal values) |
| | > 2569000 h (40 °C) |

DC/DC converters - MINI-PS- 12- 24DC/24DC/1 - 2866284

Technical data

General

| | |
|---------------------------------|--|
| Insulation voltage input/output | 1.5 kV (type test) |
| | 1 kV (routine test) |
| Degree of protection | IP20 |
| Protection class | III |
| Mounting position | horizontal DIN rail NS 35, EN 60715 |
| Assembly instructions | alignable: horizontally 0 mm, vertically 50 mm |

Connection data, input

| | |
|---------------------------------------|----------------------------|
| Connection method | Pluggable screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 7 mm |
| Screw thread | M3 |

Connection data, output

| | |
|---------------------------------------|----------------------------|
| Connection method | Pluggable screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Stripping length | 7 mm |
| Screw thread | M3 |

Signaling

| | |
|---------------------------------------|--|
| Output name | DC OK active |
| Output description | U _{OUT} > 21.5 V: High signal |
| Maximum switching voltage | ≤ 24 V DC |
| Output voltage | + 24 V (Signal) |
| Continuous load current | ≤ 20 mA |
| Status display | "DC OK" LED green |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |

DC/DC converters - MINI-PS- 12- 24DC/24DC/1 - 2866284

Technical data

Signaling

| | |
|---------------------------------------|---------------------|
| Conductor cross section flexible max. | 2.5 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 14 |
| Tightening torque, min | 0.5 Nm |
| Tightening torque max | 0.6 Nm |
| Screw thread | M3 |

Standards

| | |
|--|----------------------------|
| EMC requirements for noise immunity | EN 61000-6-1 |
| | EN 61000-6-2 |
| EMC requirements for noise emission | EN 61000-6-3 |
| | EN 61000-6-4 |
| Standard - Electrical safety | EN 60950-1/VDE 0805 (SELV) |
| Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations | EN 50178/VDE 0160 (PELV) |
| Standard - Safe isolation | DIN VDE 0100-410 |
| Rail applications | EN 50121-4 |

Conformance/approvals

| | |
|-----------------------|--|
| UL approvals | UL/C-UL listed UL 508 |
| | UL/C-UL Recognized UL 60950-1 |
| | UL ANSI/ISA-12.12.01 Class I, Division 2, Groups A, B, C, D (Hazardous Location) |
| Shipbuilding approval | DNV GL (EMC A) |

EMC data

| | |
|-------------------------------|---|
| Electromagnetic compatibility | Conformance with EMC Directive 2014/30/EU |
| Low Voltage Directive | Conformance with Low Voltage Directive 2014/35/EC |
| Electrostatic discharge | EN 61000-4-2 |
| Electromagnetic HF field | EN 61000-4-3 |
| Fast transients (burst) | EN 61000-4-4 |
| Surge voltage load (surge) | EN 61000-4-5 |
| Conducted interference | EN 61000-4-6 |
| Voltage dips | EN 61000-4-11 |


Environmental Product Compliance

| | |
|------------|---|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 25; |
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

DC/DC converters - MINI-PS- 12- 24DC/24DC/1 - 2866284

Drawings

Block diagram

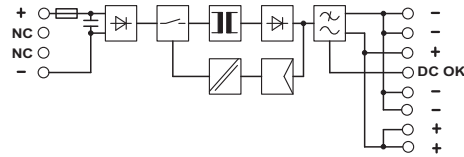

Classifications

eCl@ss

| | |
|---------------|----------|
| eCl@ss 10.0.1 | 27210901 |
| eCl@ss 11.0 | 27210901 |
| eCl@ss 4.0 | 27210900 |
| eCl@ss 4.1 | 27210900 |
| eCl@ss 5.0 | 27210900 |
| eCl@ss 5.1 | 27210900 |
| eCl@ss 6.0 | 27210900 |
| eCl@ss 7.0 | 27210901 |
| eCl@ss 9.0 | 27210901 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001039 |
| ETIM 3.0 | EC001039 |
| ETIM 4.0 | EC000599 |
| ETIM 6.0 | EC002046 |
| ETIM 7.0 | EC002046 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211502 |
| UNSPSC 7.0901 | 39121004 |
| UNSPSC 11 | 39121004 |
| UNSPSC 12.01 | 39121004 |
| UNSPSC 13.2 | 39121041 |
| UNSPSC 18.0 | 39121041 |
| UNSPSC 19.0 | 39121041 |
| UNSPSC 20.0 | 39121041 |
| UNSPSC 21.0 | 39121041 |

DC/DC converters - MINI-PS- 12- 24DC/24DC/1 - 2866284

Approvals

Approvals








Approvals

DNV GL / UL Listed / UL Recognized / cUL Recognized / cUL Listed / EAC / EAC / cULus Recognized / cULus Listed

Ex Approvals

UL Listed / cUL Listed / cULus Listed

Approval details

| | | | |
|----------------|---|---|---------------------|
| DNV GL |  | https://approvalfinder.dnvgl.com/ | TAA00001AX |
| UL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
| UL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 211944 |
| cUL Recognized |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 211944 |
| cUL Listed |  | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 123528 |
| EAC |  | | EAC-Zulassung |
| EAC |  | | RU*DE*08.B.01873/19 |

DC/DC converters - MINI-PS- 12- 24DC/24DC/1 - 2866284

Approvals

cULus Recognized



cULus Listed

