

Industrial Ethernet Switch - FL SWITCH SFN 5TX-PN - 2891151

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Ethernet switch, five TP RJ45 ports, automatic detection of data transmission speed of 10 or 100 Mbps (RJ45), autocrossing function. The multicast filter will block PROFINET PTCP-Delay traffic

Product Description

FL SWITCH SFN... Factoryline switches with standard functions can be used for quick and cost-effective Ethernet network expansion to the field level. The narrow housing design makes them suitable for universal remote use in control cabinets and junction boxes. FL SWITCH SFN...-PN switches have a unique multicast filter that blocks PROFINET PTCP-Delay traffic.

Switching properties

- Multi-address function

The switch independently learns the addresses of termination devices connected to a port by evaluating the source addresses in the data. Only packets with unknown addresses, with a source address of this port or with a multicast/broadcast address in the destination address field are forwarded via the corresponding port. Up to 2048 MAC addresses can be stored.

- Quality of service

In cases of heavy traffic, packets with an 802.1Q priority level between 4 and 7 or with an IPv4 Type of Service Precedence value of one or more are considered high priority and are processed before packets with an 802.1Q priority level between 0 and 3 or an IPv4 Type of Service Precedence value of 0.

- Multicast filtering

The multicast filter will block PROFINET PTCP-Delay traffic by filtering frames with the destination MAC address in the range 01-80-C2-00-00-02 through 01-80-C2-00-00-0F. Note that the filter blocks LLDP traffic because PTCP-Delay uses the same MAC address (01-80-C2-00-00-0E).

- Security

Low cost, low complexity security (optional) elements are available to restrict access or tampering.

- Wiring

Power connection is via a removable COMBICON connector. US is +24 V DC and GND is 0 V DC. FE is via a separate screw.


Your advantages

- ✓ Auto negotiation and autocrossing detection simplifies installation and setup
- ✓ Local diagnostic indicators with LEDs
- ✓ Multicast filter to block PROFINET PTCP-Delay traffic
- ✓ The switch also offers cable locking and port blocking
- ✓ QoS-prioritized (Quality of Service) messages
- ✓ RJ45 ports support a transmission speed of 10/100 Mbps



Key Commercial Data

Industrial Ethernet Switch - FL SWITCH SFN 5TX-PN - 2891151

Packing unit	1 pc
GTIN	 4 046356 997294
GTIN	4046356997294
Weight per Piece (excluding packing)	480.000 g
Custom tariff number	85176200
Country of origin	Taiwan

Technical data

Dimensions

Width	30 mm
Height	130 mm
Depth	100 mm

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	0 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)
Air pressure (operation)	86 kPa ... 108 kPa (up to 1500 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (up to 3500 m above sea level)

Interfaces

Interface	Ethernet (RJ45)
No. of ports	5 (RJ45 ports)
Note on the connection method	Auto negotiation and autocrossing
Transmission physics	Ethernet in RJ45 twisted pair
Transmission speed	10/100 Mbps

Function

Basic functions	Unmanaged switch / auto negotiation, complies with IEEE 802.3, store and forward switching mode
Additional functions	Autonegotiation
PROFINET conformance class	Conformance-Class A
Status and diagnostic indicators	LEDs: U _s , link and activity per port

Network expansion parameters

Cascading depth	Network, linear, and star structure: any
-----------------	--

Supply voltage

Supply voltage	24 V DC
----------------	---------

Industrial Ethernet Switch - FL SWITCH SFN 5TX-PN - 2891151

Technical data

Supply voltage

Residual ripple	3.6 V _{pp} (within the permitted voltage range)
Supply voltage range	9 V DC ... 32 V DC
Typical current consumption	90 mA (at U _S = 24 V DC)

General

Mounting type	DIN rail
Type AX	Block design
Net weight	466.9 g
Housing material	Aluminum
MTTF	192.9 Years

Standards and Regulations


Noise emission	EN 61000-6-4
Noise immunity	EN 61000-6-2:2005

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 10;
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Connection diagram

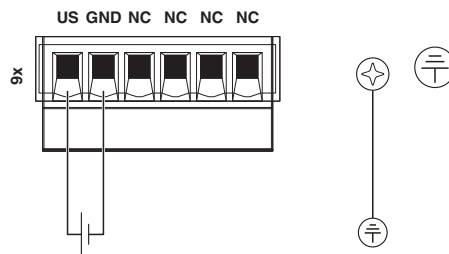

Classifications

eCl@ss

eCl@ss 10.0.1	19170402
eCl@ss 11.0	19170402
eCl@ss 5.0	19030100
eCl@ss 5.1	19030100
eCl@ss 6.0	19170100

Industrial Ethernet Switch - FL SWITCH SFN 5TX-PN - 2891151

Classifications

eCl@ss

eCl@ss 7.0	19170106
eCl@ss 9.0	19170106

ETIM

ETIM 4.0	EC000734
ETIM 6.0	EC000734
ETIM 7.0	EC000734

UNSPSC

UNSPSC 13.2	43222612
UNSPSC 18.0	43222612
UNSPSC 19.0	43222612
UNSPSC 20.0	43222612
UNSPSC 21.0	43222612

Approvals


Approvals


Approvals


EAC / UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

EAC		RU*-DE.*.B.00741/19
-----	---	---------------------

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 140324
-----------	---	---	---------------

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 140324
------------	---	---	---------------

Industrial Ethernet Switch - FL SWITCH SFN 5TX-PN - 2891151

Approvals

cULus Listed

