

Antenna barrier - RAD-PIG-RSMA-N-EX/ATEX - 2904788

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Antenna barrier, type of protection: Ex d, Ex mb, Ex i, barrier installation: zone 1, antenna installation: zone 0, 1 or 2, frequency range: 0.3 GHz ... 6 GHz, connection: RSMA (male) -> N (female), incl. 0.7 m / 2.3 ft. connection cable, ATEX and IECEx approval




Your advantages

- Universal use (frequency range of 0.3 ... 6 GHz)
- Use of standard antennas in the hazardous area of zone 0, 1, and 2



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 889278
GTIN	4046356889278
Weight per Piece (excluding packing)	200.000 g
Custom tariff number	85177000
Country of origin	United States

Technical data

Dimensions

Fixed cable length	0.76 m
--------------------	--------

Ambient conditions

Degree of protection	IP66
Ambient temperature (operation)	-40 °C ... 75 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C

General

Connection method	Type N (female)
-------------------	-----------------

Antenna barrier - RAD-PIG-RSMA-N-EX/ATEX - 2904788

Technical data

General

	RSMA (male)
Mounting	Bulkhead, M25 thread
Material for screw connection	Stainless steel
Frequency range	0.3 GHz ... 6 GHz
Impedance	50 Ω
Maximum HF output power P	2 W
Maximum error voltage U_m	250 V DC
Maximum capacity	5.64 nF

Attenuation

Cable, attenuation	0.6 dB @ 900 MHz
	1.3 dB @ 2.4 GHz
	4.8 dB @ 5.8 GHz

Standards and Regulations


ATEX	# II 2(1)G, Ex d mb [ia] IIC
------	------------------------------

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Dimensional drawing

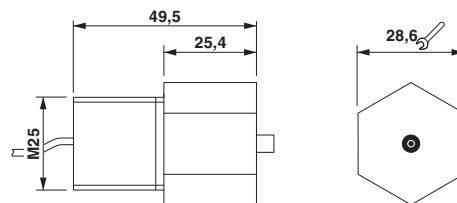

Antenna barrier - RAD-PIG-RSMA-N-EX/ATEX - 2904788

Application drawing

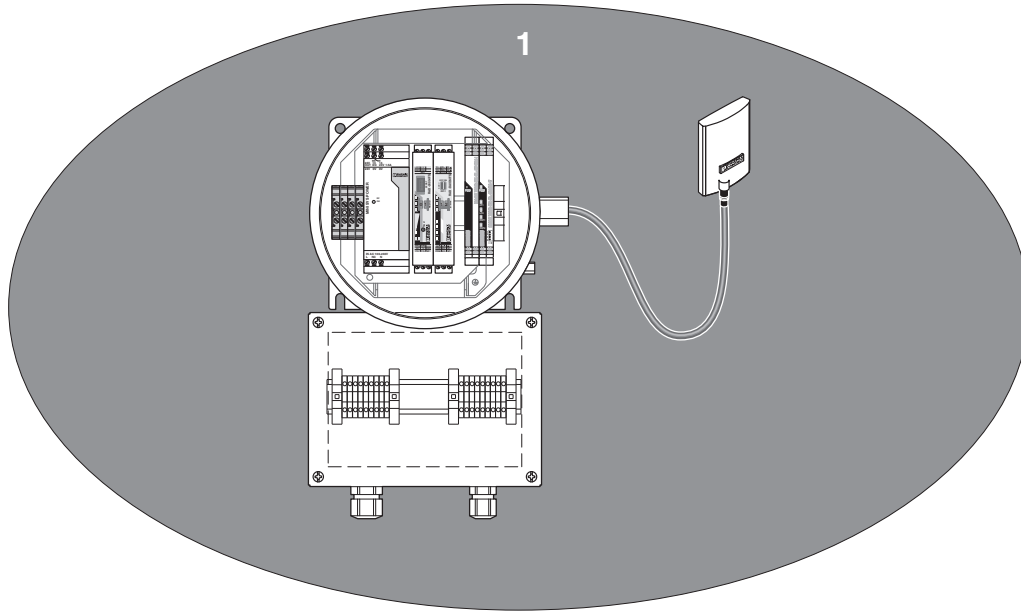

Classifications

eCl@ss

eCl@ss 4.0	27060800
eCl@ss 4.1	27060800
eCl@ss 5.0	27061800
eCl@ss 5.1	19070100
eCl@ss 6.0	27061800
eCl@ss 7.0	27061802
eCl@ss 9.0	27060310

ETIM

ETIM 4.0	EC001698
ETIM 6.0	EC001682
ETIM 7.0	EC001682

UNSPSC

UNSPSC 6.01	43171611
UNSPSC 7.0901	43221706

Antenna barrier - RAD-PIG-RSMA-N-EX/ATEX - 2904788

Classifications

UNSPSC

UNSPSC 11	43171611
UNSPSC 12.01	43221706
UNSPSC 13.2	26121606
UNSPSC 18.0	26121606
UNSPSC 19.0	26121606
UNSPSC 20.0	26121606
UNSPSC 21.0	26121606