

Antenna - RAD-900-ANT-OMNI-2-2-RSMA - 2904801

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Omnidirectional antenna, 900 MHz, gain: 2 dBi, polarization: linear, degree of protection: IP65, connection: RSMA (male), incl. 1.8 m / 6 ft. connecting cable and mounting bracket for wall mounting

Your advantages

- For freely mobile applications
- For multipoint or mesh connections



Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 902113
GTIN	4046356902113
Weight per Piece (excluding packing)	100.000 g
Custom tariff number	85177000
Country of origin	United States

Technical data

Dimensions

Width	0.3 cm
Height	8.9 cm

Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 75 °C

General

With connecting cable	yes
-----------------------	-----

Antenna - RAD-900-ANT-OMNI-2-2-RSMA - 2904801

Technical data

General


Frequency range	900 MHz
	900 MHz
Horizontal beamwidth	360 °
Vertical beamwidth	N/A
Polarization	Linear vertical
Impedance	50 Ω
Gain	2.15 dBi
Connection method	RSMA (male)
Material	V2A (Antenna housing)
	V2A (Bracket)
Mounting type	Wall mounting

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Schematic diagram

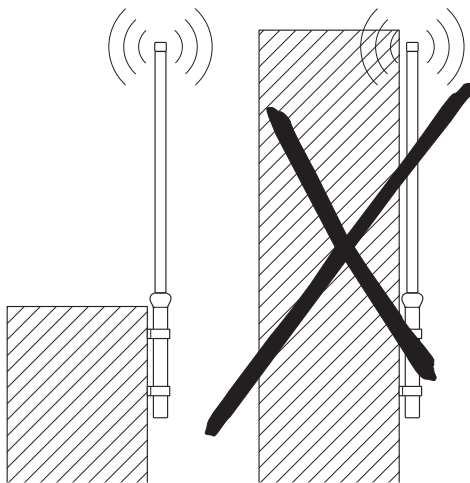

Schematic diagram

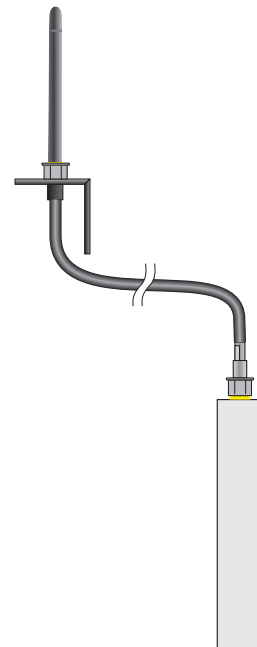

Installation example

Antenna - RAD-900-ANT-OMNI-2-2-RSMA - 2904801

Classifications

eCl@ss

eCl@ss 10.0.1	19070105
eCl@ss 11.0	19070105
eCl@ss 4.1	27230200
eCl@ss 5.0	27061800
eCl@ss 5.1	19070100
eCl@ss 6.0	27061800
eCl@ss 7.0	19070105
eCl@ss 9.0	19070105

ETIM

ETIM 4.0	EC000416
ETIM 6.0	EC001698
ETIM 7.0	EC001698

UNSPSC

UNSPSC 13.2	43221715
UNSPSC 18.0	43221715
UNSPSC 19.0	43221715
UNSPSC 20.0	43221715
UNSPSC 21.0	43221715