

Connector - C-SCM 1,5/6,3X0,8 - 3240161

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Flat connector, non-insulated, 0.5 - 1.5 mm², 6.3 x 0.8

Your advantages

- ✓ They round out the product range in terms of connectors
- ✓ The uninsulated slip-on sleeves and flat plugs are made from electrolytically tin-plated brass



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	100 pc
GTIN	 4 046356 453783
GTIN	4046356453783
Weight per Piece (excluding packing)	0.600 g
Custom tariff number	85369010
Country of origin	Czech Republic

Technical data

Dimensions

Length (b)	20 mm
Width (a)	6.3 mm
Maximum stripping length	7 mm
Material thickness (g)	0.8 mm

Ambient conditions

Ambient temperature (operation)	110 °C
---------------------------------	--------

Connector - C-SCM 1,5/6,3X0,8 - 3240161

Technical data

General


Color	silver
Stripping length	7 mm
Material	Brass
Insulating material	nicht zutreffend
Coating	tin-plated

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

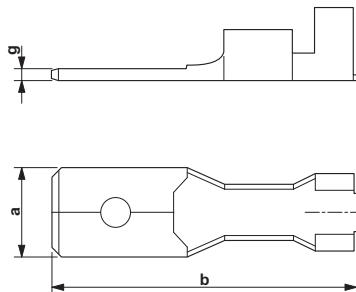

Classifications

eCl@ss

eCl@ss 10.0.1	27400212
eCl@ss 11.0	27400212
eCl@ss 4.0	27060700
eCl@ss 4.1	27060700
eCl@ss 5.0	27400200
eCl@ss 5.1	27400200
eCl@ss 6.0	27400200
eCl@ss 7.0	27400204
eCl@ss 9.0	27400212

ETIM

ETIM 2.0	EC000005
ETIM 3.0	EC000005
ETIM 4.0	EC001052

Connector - C-SCM 1,5/6,3X0,8 - 3240161

Classifications

ETIM

ETIM 6.0	EC001059
ETIM 7.0	EC001059

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	27121703
UNSPSC 11	27121703
UNSPSC 12.01	27121703
UNSPSC 13.2	27121707
UNSPSC 19.0	27121707