


Rittal – The System.

Faster – better – everywhere.

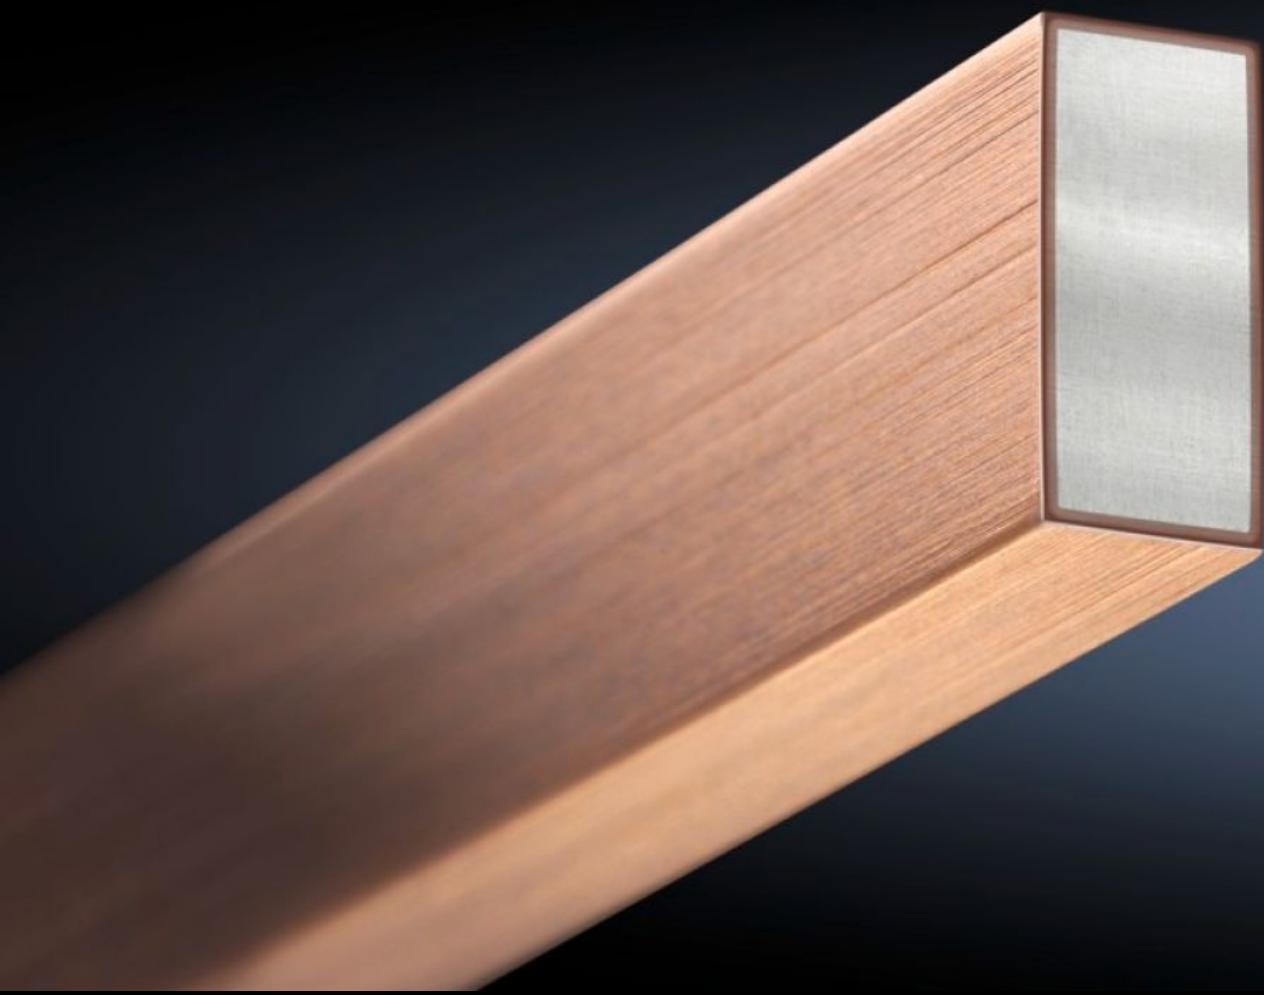

SV 3582.020

Busbars CUPONAL

State: 3/14/2022 (Source: rittal.com/us-en)



FRIEDHELM LOH GROUP

SV 3582.020 - Busbars CUPONAL

Copper-coated aluminum busbars.

Features

Product description	Copper-coated aluminum busbars, suitable for configuring busbar systems with busbar supports SV 9340.000/SV 9340.050.
Material	Aluminum Copper
Length	2,400 mm 94.5 "
Rated current max.	235 A
Note	The rated current is generated at 65°C rail temperature and 35°C ambient temperature Correction factor diagram according to DIN EN 43 671 May be cut to length as required
Standards	DIN EN 13 601
Cross-section	Flat copper bar width: 20 mm Flat copper bar thickness: 5 mm Flat copper bar width: 0.79 " Flat copper bar thickness: 0.2 "
Weight/packaging unit	39 kg 86 lb.
Packaging unit	6 Stück
ETIM 7.0	EC001522
ECLASS 8.0	27370303

Approvals

Explanations	Declaration of conformity
--------------	---------------------------