


# Rittal – The System.

Faster – better – everywhere.

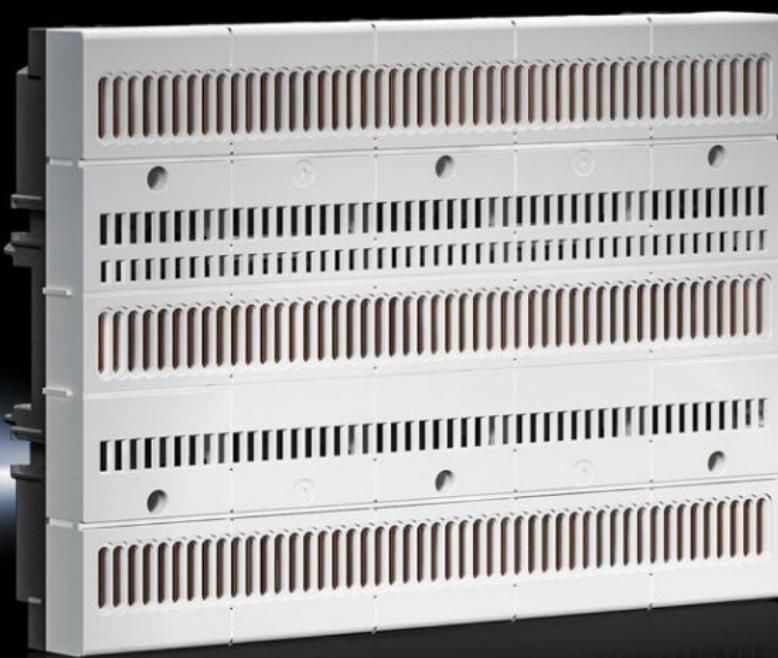

## SV 9635.000

## Board

State: 3/14/2022 (Source: [rittal.com/us-en](https://rittal.com/us-en))

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# SV 9635.000 - Board RiLine Compact

Board with integrated busbars.

## Features

Function principle	Contact-protected busbar board for the safe accommodation and contacting of components, due to simple plug-in mounting Pre-punched pitch units in the board allow secure, fast positioning of components Reduction of wiring effort due to direct contact on the board For snap-on mounting onto 35 x 7.5/15 mm support rails or for direct attachment on mounting plate
Material	Polyamide Polycarbonate E-Cu Fire behavior corresponding to UL 94
Color	RAL 7035
Supply includes	Including integrated busbars
Protection category IP to IEC 60 529	IP 20
Rated current max.	125 A
Rated operating voltage	690 V (AC) 600 V (DC)
Rated current (UL)	100 A
Max. pitch units @ 45 mm	5
Note	The technical data may vary for UL applications.
Standards	UL 508 IEC 61 439

# Features

---

Dimensions	Width: 225 mm Height: 160 mm Depth: 45.1 mm Width: 8.86 “ Height: 6.3 “ Depth: 1.78 “
Rated operating voltage (max.) UL	600 V AC 600 V (DC)
Weight/packaging unit	0.808 kg 1.8 lb.
Packaging unit	1 Stück
ETIM 7.0	EC001522
ECLASS 8.0	27370303

# Approvals

---

Approvals	UL + C-UL
Explanations	Declaration of conformity