
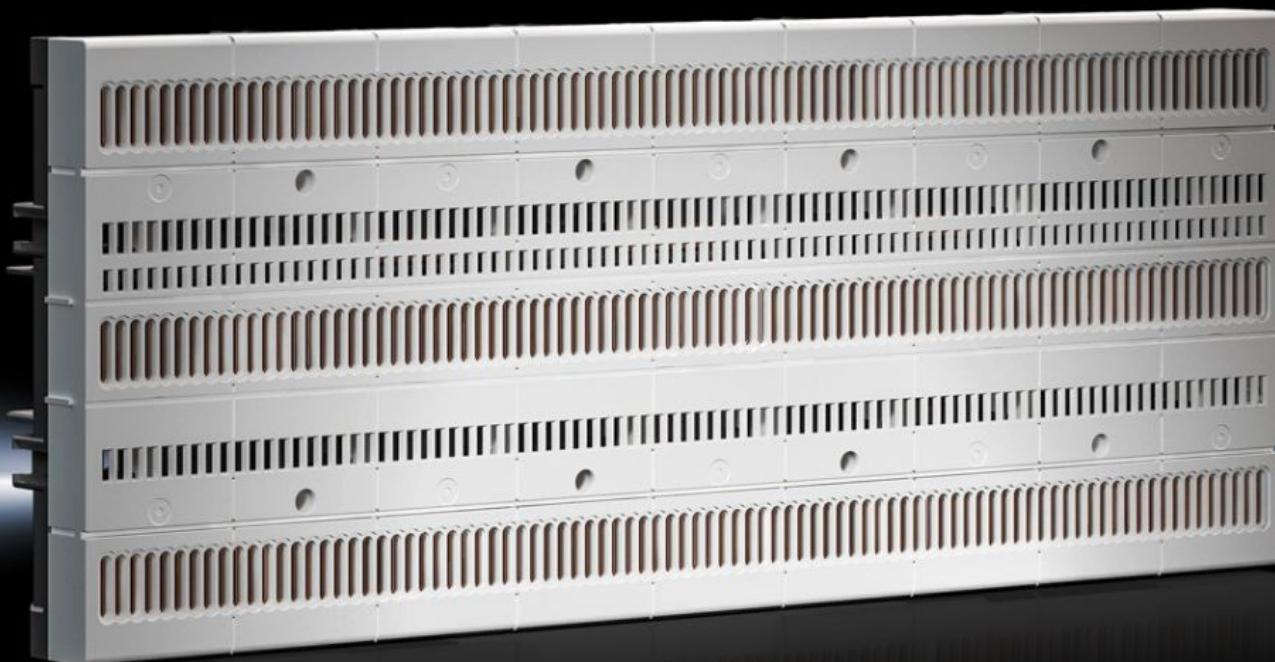


Rittal – The System.


Faster – better – everywhere.



SV 9635.010

Board

State: 3/14/2022 (Source: ittal.com/us-en)

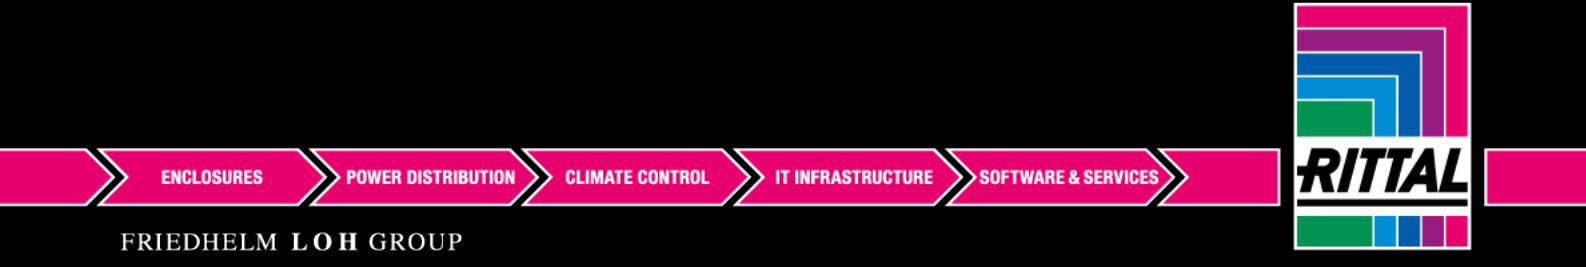

SV 9635.010 - Board RiLine Compact

Board with integrated busbars.

Features

Function principle	Contact-protected busbar board for the safe accommodation and contacting of components, due to simple plug-in mounting Pre-punched pitch units in the board allow secure, fast positioning of components Reduction of wiring effort due to direct contact on the board For snap-on mounting onto 35 x 7.5/15 mm support rails or for direct attachment on mounting plate
Material	Polyamide Polycarbonate E-Cu Fire protection corresponding to UL 94-V0
Color	RAL 7035
Supply includes	Including integrated busbars
Protection category IP to IEC 60 529	IP 20
Rated current max.	125 A
Rated operating voltage	690 V (AC) 600 V (DC)
Rated current (UL)	100 A
Max. pitch units @ 45 mm	9
Note	The technical data may vary for UL applications.
Standards	UL 508 IEC 61 439

Features

Dimensions	Width: 405 mm Height: 160 mm Depth: 45.1 mm Width: 15.9 " Height: 6.3 " Depth: 1.78 "
Rated operating voltage (max.) UL	600 V AC 600 V (DC)
Weight/packaging unit	1.377 kg 3 lb.
Packaging unit	1 Stück
ETIM 7.0	EC001522
ECLASS 8.0	27370303

Approvals

Approvals	UL + C-UL
Explanations	Declaration of conformity