

Rittal – The System.

Faster – better – everywhere.

▶ LED system light - 2500100

Date : Apr 30 , 2021

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



LED system light - 2500100

created: 04.30.2021 build on <https://www.rittal.us/>

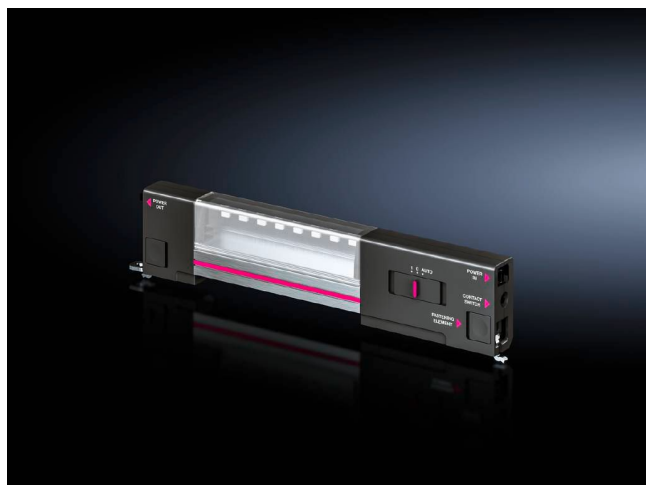

Product Description

Version	without socket
Description	LED system light - the first light designed especially for enclosures! Advanced LED technology provides even more light into the last recess.
Benefits	A configuration to suit every application Optimum illumination of the entire enclosure Option of clip-on screw or magnetic attachment
Fittings	without socket
Material	Light body: Extruded aluminum Light cover: Polycarbonate (halogen-free) Light ends: PC-ABS (halogen-free)
Color	Enclosure: RAL 7016
Protection category IP to IEC 60 529	IP 20
Supply includes	Assembly screws
Dimensions	Height: 55 mm (2.2 ") Width: 262 mm (10 ") Depth: 23 mm (0.91 ")
Installation options	AE CM TP: with universal bracket AE: with rail for interior installation
Rated operating voltage	100V - 240V 1~ 50Hz/60Hz

Rated power Pel	5 W
Luminous flux	400 lm
Light color	4000 K (neutral white)
Protection category	II (total insulation)
Connection options	Door-operated switch Power Supply 2-pole Through-wiring 2-pole
Light – installation type	Screw fastening Clip fastening Magnetic fastener (accessories)
Operating temperature	-20°C...+55°C
Packaging unit	1 pc(s).
Weight/packaging unit	0.29 kg (0.6 lb.)
EAN	4028177806931
Customs tariff number	94054099
Product description (long)	SZ System Light LED 400 Lumen L: 262 mm 100-240 V