

Product availability : Stock - Normally stocked in distribution facility



Price\*\* : 5,765.00 USD



### Main

|                              |                                         |
|------------------------------|-----------------------------------------|
| Product                      | Single Throw Safety Switch              |
| Current Rating               | 400 A                                   |
| Certifications               | UL listed file E2875                    |
| Enclosure Rating             | NEMA 3R galvanized steel                |
| Factory Installed Neutral    | Neutral (factory installed)             |
| Disconnect Type              | Fusible disconnect                      |
| Short Circuit Current Rating | 10 kA H or K<br>200 kA R, J or L        |
| Mounting Type                | Surface                                 |
| Number of Poles              | 3                                       |
| Electrical Connection        | Lugs                                    |
| Duty Rating                  | Heavy duty                              |
| Voltage Rating               | 600 V AC/DC                             |
| Wire Size                    | AWG 1/0...750 kcmil copper or aluminium |

### Complementary

|                   |                                             |
|-------------------|---------------------------------------------|
| Width             | 708.15 mm (27.88 in)                        |
| Height            | 1277.87 mm (50.31 in)                       |
| Depth             | 257.30 mm (10.13 in)                        |
| Tightening torque | 62.14 N.m (550 lbf.in) AWG 1/0...750 kcmil) |

### Ordering and shipping details

|                     |                                  |
|---------------------|----------------------------------|
| Category            | 00054 - H&HU SW,NEMA3R,400-1200A |
| Discount Schedule   | DE1                              |
| GTIN                | 00785901026686                   |
| Package weight(Lbs) | 84.37 kg (186 lb(US))            |
| Returnability       | Yes                              |

|                   |    |
|-------------------|----|
| Country of origin | MX |
|-------------------|----|


## Offer Sustainability

|                            |                                                                                                                        |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Sustainable offer status   | Green Premium product                                                                                                  |
| REACH Regulation           | <a href="#">REACH Declaration</a>                                                                                      |
| REACH free of SVHC         | Yes                                                                                                                    |
| EU RoHS Directive          | Compliant<br><a href="#">EU RoHS Declaration</a>                                                                       |
| Mercury free               | Yes                                                                                                                    |
| RoHS exemption information | <a href="#">Yes</a>                                                                                                    |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a><br>Product out of China RoHS scope. Substance declaration for your information. |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>                                                                          |
| Circularity Profile        | No need of specific recycling operations                                                                               |


## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Approximate Dimensions

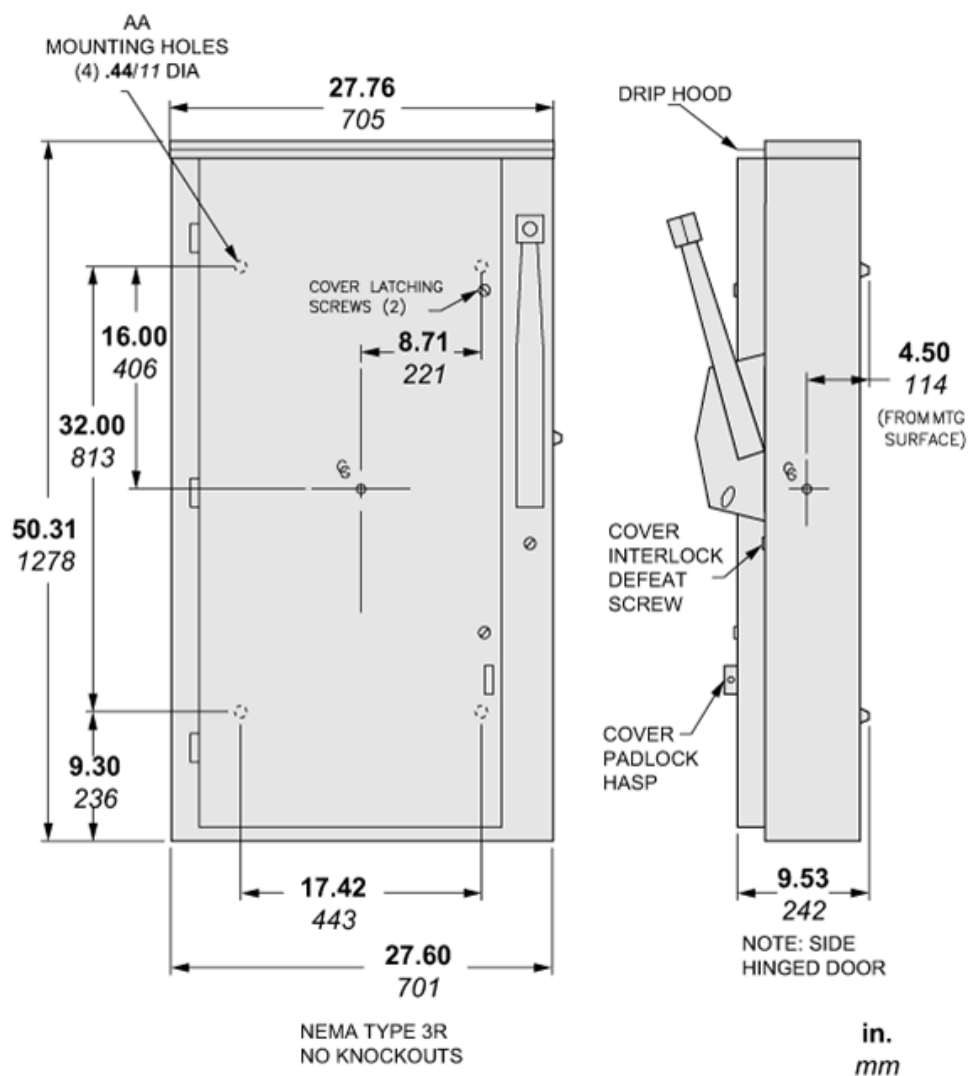

Wiring Diagrams

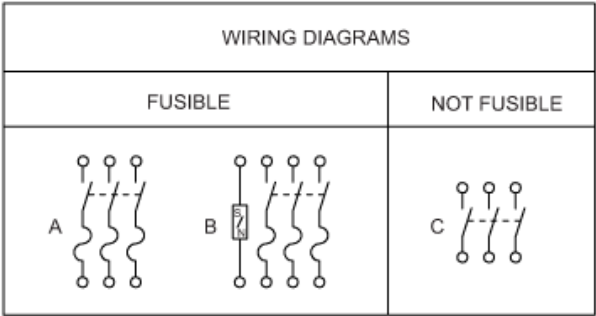

| TERMINAL LUGS DATA |                     |                    |          |
|--------------------|---------------------|--------------------|----------|
| AMPERE             | MAX WIRE            | MIN WIRE           | TYPE     |
| 400                | (1) 750 KCMIL       | (1) #1/0 AWG       | AL OR CU |
|                    | OR<br>(2) 300 KCMIL | OR<br>(2) #1/0 AWG |          |