

HU365R

SWITCH NONFUSIBLE HD 600V 400A 3P NEMA3R

Product availability : Stock - Normally stocked in distribution facility



Price** : 3,840.00 USD



Main

Product	Single Throw Safety Switch
Current Rating	400 A
Certifications	UL listed file E2875
Enclosure Rating	NEMA 3R galvanized steel
Factory Installed Neutral	None
Disconnect Type	Non-fusible disconnect
Short Circuit Current Rating	200 kA maximum
Mounting Type	Surface
Number of Poles	3
Electrical Connection	Lugs
Duty Rating	Heavy duty
Voltage Rating	600 V AC/DC
Wire Size	AWG 1/0...750 kcmil copper or aluminium

Complementary

Width	708.15 mm (27.88 in)
Height	1277.87 mm (50.31 in)
Depth	257.30 mm (10.13 in)
Tightening torque	62.14 N.m (550 lbf.in) AWG 1/0...750 kcmil)

Ordering and shipping details

Category	00054 - H&HU SW,NEMA3R,400-1200A
Discount Schedule	DE1
GTIN	00785901450481
Package weight(Lbs)	84.82 kg (187 lb(US))

Returnability	Yes
Country of origin	MX


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Environmental Disclosure	Product Environmental Profile


Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

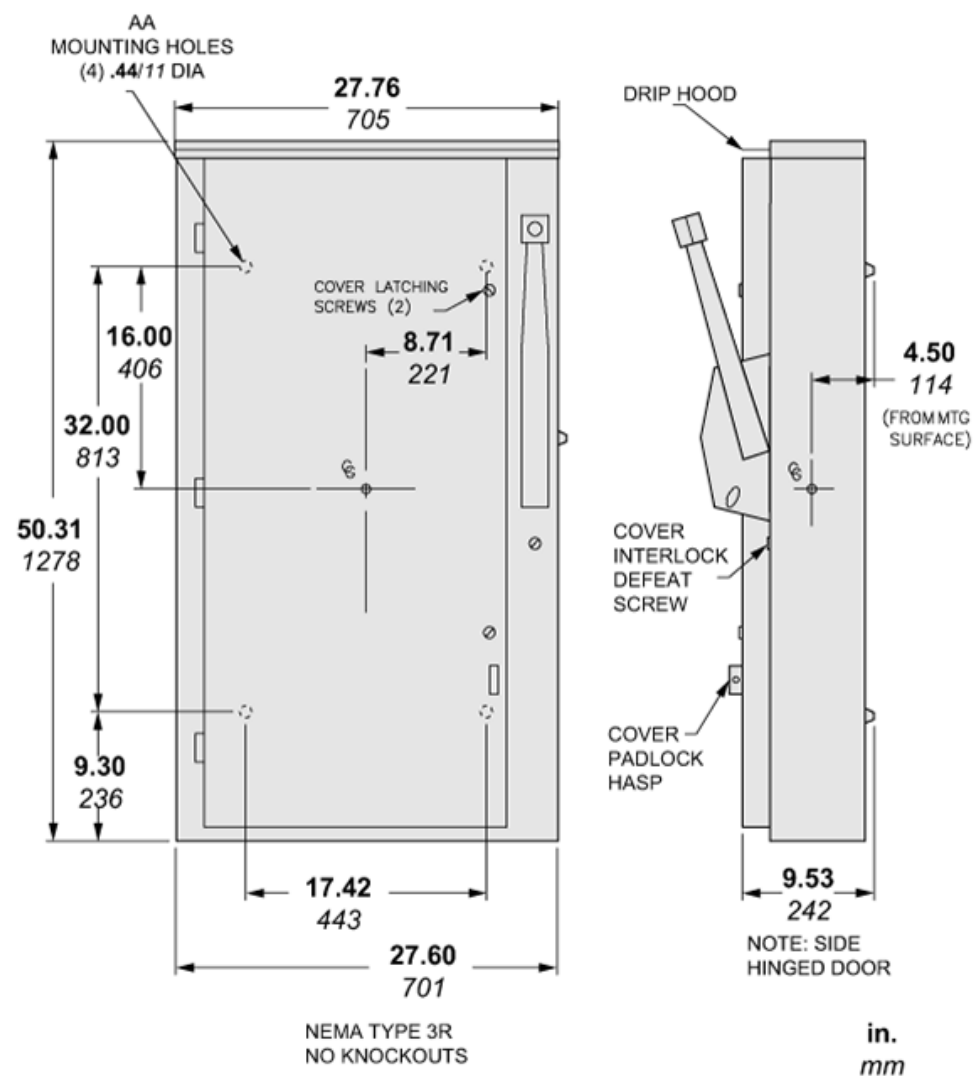

Wiring Diagrams

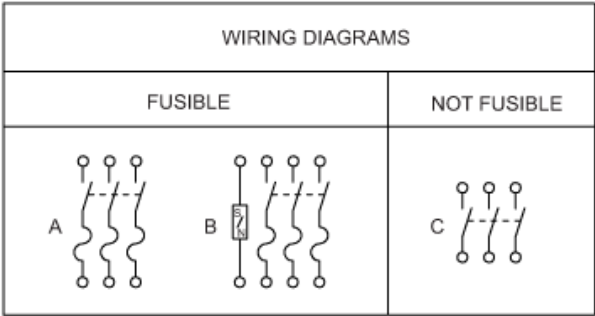

TERMINAL LUGS DATA			
AMPERE	MAX WIRE	MIN WIRE	TYPE
400	(1) 750 KCMIL	(1) #1/0 AWG	AL OR CU
	OR (2) 300 KCMIL	OR (2) #1/0 AWG	