



Price\*\* : 231.00 USD



## Main

Range of product	Zelio Control
Product or component type	Modular measurement and control relays
Relay type	Motor temperature control relay
Product specific application	For 3-phase supply
Relay name	RM35TM
Relay monitored parameters	Phase failure detection Phase sequence Test/reset button Motor temperature via PTC probe Selection (with or without memory)
Time delay	Fixed 0.3 s
Switching capacity in VA	1250 VA
Measurement range	208...480 V voltage AC 0...20 Ohm short-circuit detection

## Complementary

Reset time	10000 ms output
Maximum switching voltage	250 V AC 250 V DC
Minimum switching current	10 mA 5 V DC
Maximum switching current	5 A AC 5 A DC
Supply voltage limits	20.4...264 V AC 20.4...264 V DC
Power consumption in VA	0...4 VA 24...240 V AC
Power consumption	0.5 W DC
Control circuit frequency	50...60 Hz +/- 10 %
Resistance across terminals	602 mOhm

Output contacts	2 NO
Nominal output current	5 A
Measurement voltage limits	176...528 V AC
Delay at power up	500 ms
Voltage range	176...528 V
Response time	> 50 ms input Y1 (contact Y1-T1) and push-button)
[Uc] control circuit voltage	<= 3.6 V temperature control circuit T1-T2 terminals open)
Short-circuit current	0.007 A temperature sensing circuit T1-T2 terminals short circuited)
Maximum resistance	1500 Ohm temperature sensor 68 °F (20 °C)
Tripping threshold	3100 Ohm +/- 10 % temperature control circuit
Reset threshold	1650 Ohm +/- 10 % temperature control circuit
Marking	CE
Overvoltage category	III IEC 60664-1
Insulation resistance	> 500 MOhm 500 V DC between supply and relay output IEC 60255-5 > 500 MOhm 500 V DC between measurement and relay output IEC 60664-1 > 1 MOhm 500 V DC between supply and measurement IEC 60255-5 > 500 MOhm 500 V DC between supply and relay output IEC 60664-1 > 500 MOhm 500 V DC between measurement and relay output IEC 60255-5 > 1 MOhm 500 V DC between supply and measurement IEC 60664-1
[Ui] rated insulation voltage	400 V IEC 60664-1
Supply frequency	50/60 Hz +/- 10 %
Operating position	Any position without
Connections - terminals	Screw terminals, 1 x 0.5...1 x 4 mm <sup>2</sup> AWG 20...AWG 11) solid without cable end Screw terminals, 2 x 0.5...2 x 2.5 mm <sup>2</sup> AWG 20...AWG 14) solid without cable end Screw terminals, 1 x 0.2...1 x 2.5 mm <sup>2</sup> AWG 24...AWG 12) flexible with cable end Screw terminals, 2 x 0.2...2 x 1.5 mm <sup>2</sup> AWG 24...AWG 16) flexible with cable end
Tightening torque	5.31...8.85 lbf.in (0.6...1 N.m) IEC 60947-1
Housing material	Self-extinguishing plastic
Local signalling	Power ON LED green) Phase of relay (R2) LED yellow) Temperature of relay (R1) LED yellow)
Mounting support	35 mm symmetrical DIN rail EN/IEC 60715
Electrical durability	10000 cycles
Mechanical durability	30000000 cycles
Operating rate	<= 360 operations/hour full load
Utilisation category	AC-12 IEC 60947-5-1 AC-13 IEC 60947-5-1 AC-14 IEC 60947-5-1 AC-15 IEC 60947-5-1 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1
Width	1.38 in (35 mm)
Net weight	0.29 lb(US) (0.13 kg)

## Environment

Immunity to microbreaks	20 ms 20.4 V
Electromagnetic compatibility	Emission standard for industrial environments EN/IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments EN/IEC 61000-6-3 Immunity for industrial environments EN/IEC 61000-6-2
Standards	EN/IEC 60255-6 IEC 60034-11-2
Product certifications	CSA C-Tick GOST UL GL
Directives	73/23/EEC - low voltage directive 89/336/EEC - electromagnetic compatibility
Ambient air temperature for storage	-40...158 °F (-40...70 °C)

Ambient air temperature for operation	-4...122 °F (-20...50 °C)
Relative humidity	95 % 131 °F (55 °C) IEC 60068-2-30
Vibration resistance	0.35 mm 5...57.6 Hz)IEC 60068-2-6 1 gn 57.6...150 Hz)IEC 60255-21-1
Shock resistance	15 gn 11 ms IEC 60255-21-1
IP degree of protection	IP20 IEC 60529 terminals) IP30 IEC 60529 casing)
Pollution degree	3 IEC 60664-1
Dielectric test voltage	2 kV AC 50 Hz, 1 min
Non-dissipating shock wave	4 kV

### Ordering and shipping details

Category	22380 - RELAYS-MEASUREMENT (RM17-RM35)
Discount Schedule	CP2
GTIN	00785901869498
Package weight(Lbs)	0.13 kg (0.29 lb(US))
Returnability	No
Country of origin	ID

### Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

### Contractual warranty

Warranty	18 months
----------	-----------

3-Phase Supply and Motor Temperature Control Relays

Dimensions and Mounting

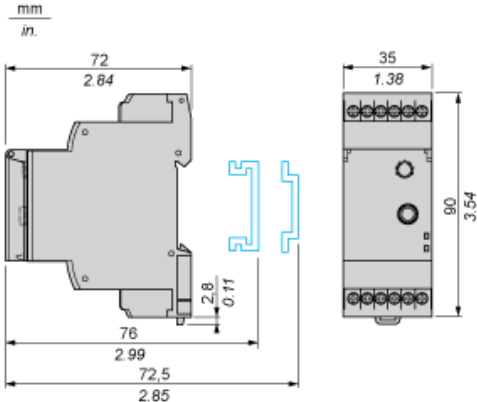


---

3-Phase Supply and Motor Temperature Control Relays

---

Wiring Diagram




---


## Function Diagrams

---

### Phase Sequence Control and Phase Failure Detection (U measured < 0.7 x nominal supply voltage)

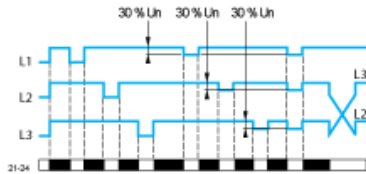

### Motor Temperature Control via PTC Probe

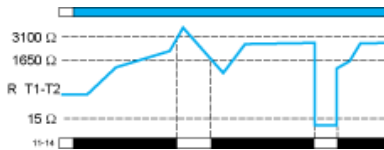

### Legend

Un Nominal 3-phase supply voltage

R T1-T2 Resistance between terminals T1 and T2

11-14 R1 output relay connections

Relay status: black color = energized.


NOTE: The temperature control relay can take up to 6 PTC (positive temperature coefficient) probes wired in series between terminals T1 and T2.

Function Diagrams

Motor Temperature Control via PTC Probe

As soon as the temperature returns to the correct value, the relay can be unlocked (reset), either by pressing the “Test/Reset” button (for at least 200 ms), or by closing a volt-free contact (for at least 200 ms) between terminal Y1 and T1 (without a parallel load). When a fault is detected, the “temperature” output relay locks in the open position, even if the “Test/Reset” button is pressed.


With memory (“Memory” mode)

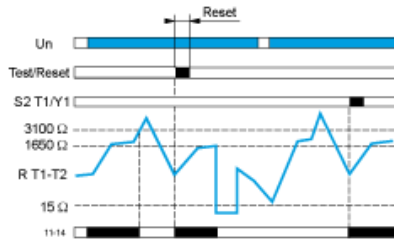


Use of the “Test/Reset” Button

When the temperature is normal, pressing the “Test/Reset” button simulates overheating, the “temperature” output relay contact is open.

Without memory (“No Memory” mode).

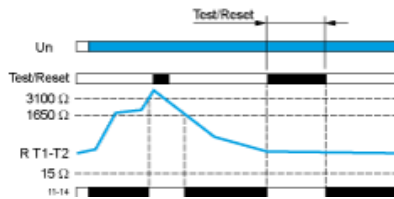

With memory (“Memory” mode)

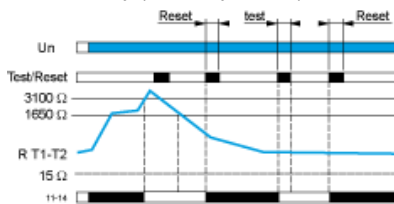

Legend

- Un Nominal 3-phase supply voltage
- R T1-T2 Resistance between terminals T1 and T2
- 11-14 R1 output relay connections
- Relay status: black color = energized.

In “Memory” mode, “fault” indication is locked and the button must be released then pressed again to reset the function. When a fault has been detected and the temperature has returned to normal, the “temperature” control relay can be unlocked (reset) by pressing the “Test/Reset” button.