

Product data sheet

Characteristics

2510MBG2

Manual Starter, integral horsepower, NEMA M0, 600 VAC, 3 pole, 5 HP at 380/575 VAC, three phase, no indicator, NEMA 1



Product availability: Stock - Normally stocked in distribution facility

Price*: 323.40 USD



Main

Product or component type	Manual Starter
Range of product	M
NEMA size	M-0

Complementary

Control type	Push-button
Local signalling	No indicator
Maximum Horse Power Rating	3 Hp 200...230 V AC, 3 phase 5 Hp 380...575 V AC, 3 phase
[Ue] rated operational voltage	600 V AC
Poles description	3P
Motor starter type	Non reversing
Electrical connection	Pressure wire clamp
Thermal overload type	Melting alloy
Number of thermal units required	3
AWG gauge	AWG 14...AWG 8 copper
Auxiliary contact composition	Without
Height	8.63 In (219.20 mm)
Width	5 In (127.00 mm)
Depth	4.13 In (104.90 mm)
Net weight	4.14 Lb(US) (1.88 kg)

Environment

Product certifications	CSA LR60905 class 3211 05 UL listed file E42243 CCN NLRV
NEMA degree of protection	NEMA 1 painted sheet steel

Ordering and shipping details

Category	21103 - 2510,2511,2512 M,T
Discount Schedule	CP1
GTIN	00785901792536
Nbr. of units in pkg.	1
Package weight(Lbs)	4.15 Lb(US) (1.882 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	4.60 In (11.684 cm)
Package 1 width	5.70 In (14.478 cm)
Package 1 Length	9.10 In (23.114 cm)
Unit Type of Package 2	PAL
Number of Units in Package 2	126
Package 2 Weight	535.00 Lb(US) (242.672 kg)
Package 2 Height	40.00 In (101.6 cm)
Package 2 width	40.00 In (101.6 cm)
Package 2 Length	48.00 In (121.92 cm)


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
PVC free	Yes

Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

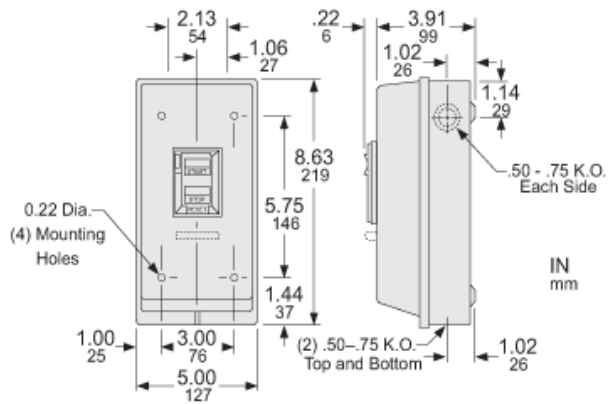

Product Life Status : Commercialised