

Product data sheet

Characteristics

5S1F

TRANSFORMER DRY 5KVA

240X480V-120/240V



Product availability: Stock - Normally stocked in distribution facility

Price*: 1556.00 USD



Main

Product or Component Type	Dry Sealed Transformer
Primary voltage	240 x 480 V 120/240 V
Number of tap-offs	0

Complementary

Box number	13B
Phase	1 phase
Rated power in VA	5 KVA
Temperature rise	115 °C
Maximum Height	14.75 In (374.65 mm)
Maximum Width	9.75 In (247.65 mm)
Maximum Depth	11.75 In (298.45 mm)
Enclosure mounting	Wall mounted
Net Weight	115 Lb(US) (52.16 kg) 114.91 Lb(US) (52.12 kg)
Enclosure Material	Painted sheet steel

Environment

NEMA Degree of Protection	NEMA 3R
Insulation temperature	356 °F (180 °C)
Product Certifications	UL Listed CSA CULus

Ordering and shipping details

Category	16277 - RESIN LVGP XFMR
Discount Schedule	PE2
GTIN	00785901359425
Nbr. of units in pkg.	1
Package weight(Lbs)	115.00 Lb(US) (52.163 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	14.75 In (37.465 cm)
Package 1 width	9.75 In (24.765 cm)
Package 1 Length	11.75 In (29.845 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
PVC free	Yes




Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

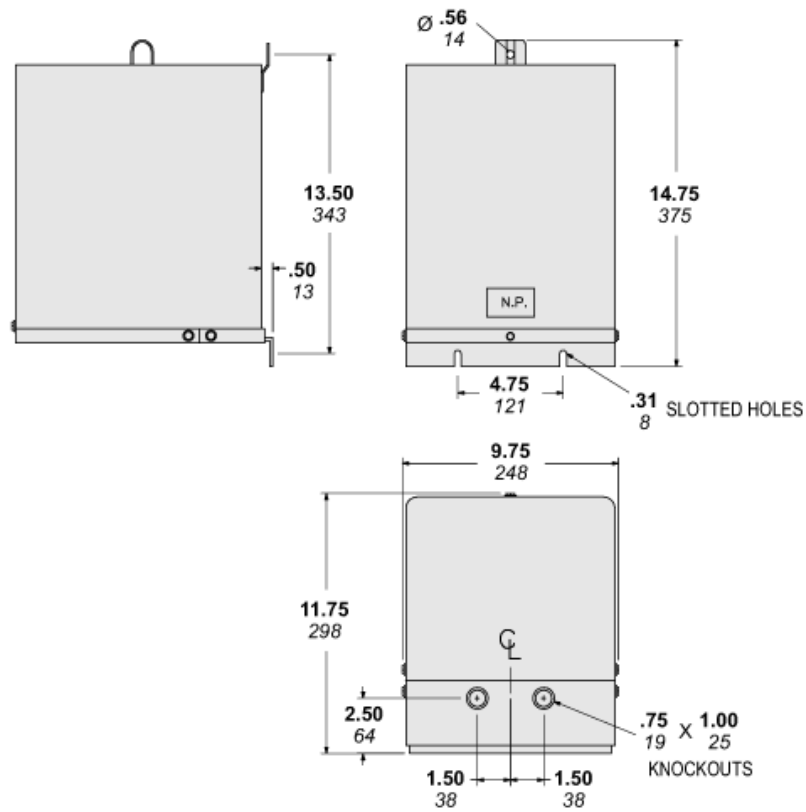

Wiring

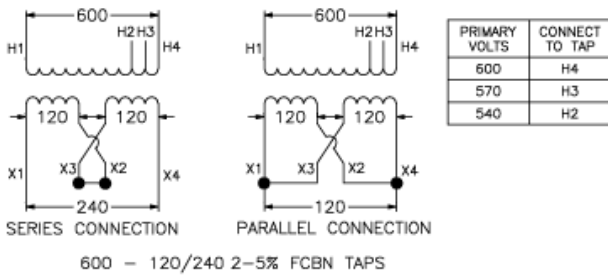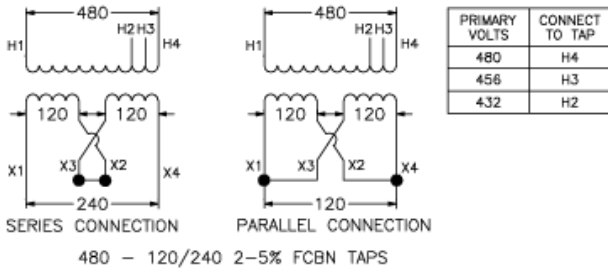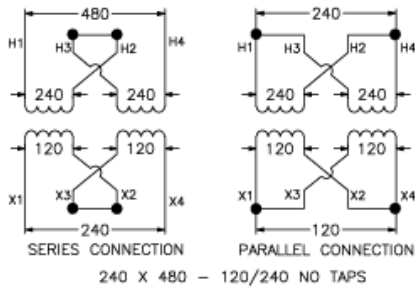

KVA	CATALOG NUMBERS			TEMP. RISE	GUAR. SOUND LEVEL	WGT LBS
	PRIMARY					
	240X480	480	600			
5	5S1F	5S40F	5S4F	115°C	40 DB	115
7.5	7S1F	7S40F	7S4F	115°C	40 DB	135
10	10S1F	10S40F	10S4F	115°C	45 DB	165

Product Life Status : Commercialised