

# Product data sheet

## Characteristics

# 8536SBO2V03

NEMA Motor Starter, Type S, nonreversing, Size 0, 18A, 5 HP at 460 VAC, 5 kA SCCR, 3 phase, 3 pole, melting alloy, 240 VAC coil, open



Product availability: Non-Stock - Not normally stocked in distribution facility

Price\*: 485.00 USD



### Main

Product or Component Type	Motor starter
Range of Product	S
Motor starter type	Non reversing

### Complementary

NEMA size	0
Line Rated Current	18 A
Poles description	3P
[Ue] rated operational voltage	600 V AC
Phase	3 phase
Thermal overload type	Melting alloy 3
Rated power in HP	3 HP 200 V AC 3 HP 230 V AC 5 HP 460 V AC 5 HP 575 V AC
Product compatibility	Circuit-breaker: 5 kA at 600 V AC Fuse: 5 kA at 600 V AC
[Uc] control circuit voltage	220 V AC 50 Hz 240 V AC 60 Hz
Control circuit	Common control circuit
Control type	No control units
Local signalling	Without pilot light
Auxiliary contact composition	Without
Electrical Connection	Screw clamp terminals
Maximum Height	6.81 In (172.96 mm)
Maximum Width	3.50 In (88.90 mm)
Maximum Depth	4.22 In (107.19 mm)

## Environment

NEMA degree of protection	Not rated (open device)
Product Certifications	UL Listed CSA NEMA

## Ordering and shipping details

Category	21191 - 8502,36 SA,SB(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	00785901871828
Nbr. of units in pkg.	1
Package weight(Lbs)	4.06 Lb(US) (1.842 kg)
Returnability	No
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	4.50 In (11.43 cm)
Package 1 width	5.90 In (14.986 cm)
Package 1 Length	8.00 In (20.32 cm)


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

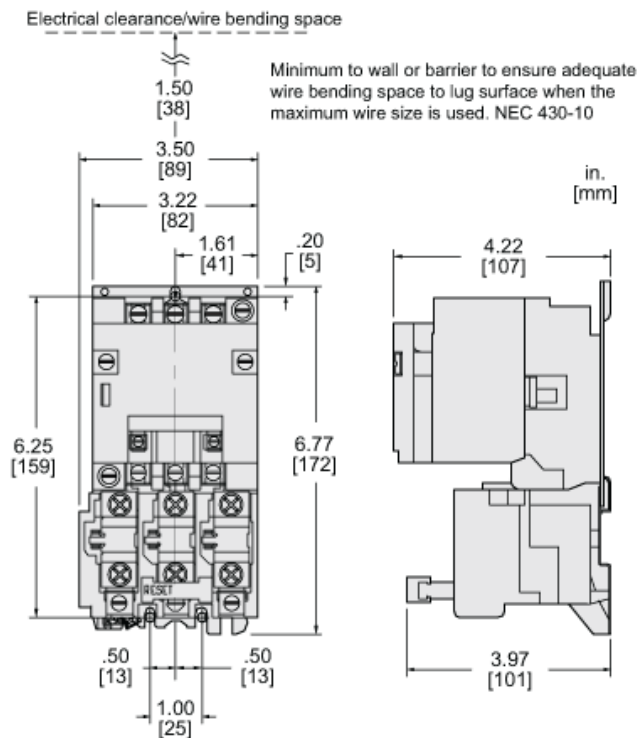

Product Life Status : Commercialised