

# Product data sheet


## Characteristics

# 8903LXO20V02

8903LX mechanically held lighting contactor, 2 P, 2 NO, 30 A, 600 V, 110/120 V 50/60 Hz coil, open



Product availability: Non-Stock - Not normally stocked in distribution facility

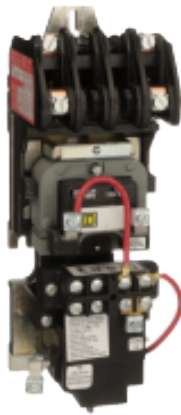

### Main

Product or Component Type	Mechanically Held Lighting Contactor
Range of Product	8903LX
Control circuit	Separate control circuit

### Complementary

[Uc] control circuit voltage	110 V AC 50 Hz 120 V AC 60 Hz
Inrush power in VA	150 VA 60 Hz 140 VA 50 Hz 25 VA 50/60 Hz
Line Rated Current	20 A tungsten 30 A fluorescent
Poles description	2P 2 NO
Control type	No control units
Local signalling	No indicator
Additional included device	None
Electrical Connection	Screw-clamp terminals
Maximum Height	8.82 In (224 mm)
Maximum Depth	3.27 In (83 mm)
Maximum Width	2.87 In (73 mm)

### Environment

NEMA degree of protection	Not rated (open device)
Product Certifications	UL Listed CSA

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Ordering and shipping details

Category	21322 - 8903 LX (NOT L)
Discount Schedule	CP1
GTIN	00785901057239
Nbr. of units in pkg.	1
Package weight(Lbs)	4.60 Lb(US) (2.087 kg)
Returnability	No
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	4.50 In (11.43 cm)
Package 1 width	7.40 In (18.796 cm)
Package 1 Length	10.50 In (26.67 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

## Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status : **Commercialised**