

# Product data sheet


## Characteristics

# 8903LXO20V03

8903LX mechanically held lighting contactor, 2 P, 2 NO, 30 A, 600 V, 220/240 V 50/60 Hz coil, open



Product availability: Non-Stock - Not normally stocked in distribution facility

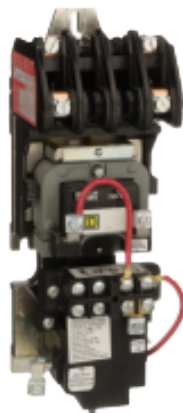

### Main

Product or Component Type	Mechanically Held Lighting Contactor
Range of Product	8903LX
Control circuit	Separate control circuit

### Complementary

[Uc] control circuit voltage	220 V AC 50 Hz 240 V AC 60 Hz
Inrush power in VA	150 VA 60 Hz 140 VA 50 Hz 25 VA 50/60 Hz
Line Rated Current	20 A tungsten 30 A fluorescent
Poles description	2P 2 NO
Control type	No control units
Local signalling	No indicator
Additional included device	None
Electrical Connection	Screw-clamp terminals
Maximum Height	8.82 In (224 mm)
Maximum Depth	3.27 In (83 mm)
Maximum Width	2.87 In (73 mm)

### Environment

NEMA degree of protection	Not rated (open device)
Product Certifications	UL Listed CSA

## Ordering and shipping details

Category	21322 - 8903 LX (NOT L)
Discount Schedule	CP1
GTIN	00785901603856
Nbr. of units in pkg.	1
Package weight(Lbs)	8.68 Lb(US) (3.939 kg)
Returnability	No
Country of origin	MX

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	4.00 In (10.16 cm)
Package 1 width	7.50 In (19.05 cm)
Package 1 Length	10.50 In (26.67 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

## Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status : **Commercialised**