

Product data sheet

Characteristics


8910DP22V14

Contactor, Definite Purpose, 25A, 2 pole, 24/24 VAC 50/60 Hz coil, open



Product availability: Stock - Normally stocked in distribution facility

Price*: 64.38 USD

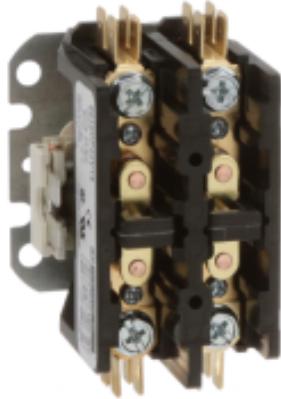

⚠ This Product is Obsolete

Commercial status

This Product is Obsolete : JUL 09, 2021

Main

Product or component type	Definite Purpose Contactor
Line Rated Current	25 A
Poles description	2P
Pole contact composition	2 NO
Range of product	DP

Complementary

Maximum Horse Power Rating	2 Hp 115 V AC, 1 phase 3 Hp 230 V AC, 1 phase
Locked rotor rated current	125 A 460 V AC 100 A 575 V AC 150 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	24 V AC 50/60 Hz
Phase	1 phase
Electrical connection	Quick connect terminals Binder head

Environment

Product certifications	UL Recognized CSA
------------------------	----------------------

Ordering and shipping details

Category	21354 - 8910 DP 22
Discount Schedule	CP1B
GTIN	00785901080459
Nbr. of units in pkg.	1
Package weight(Lbs)	9.60 Oz (272.155 g)

Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.60 In (6.604 cm)
Package 1 width	3.40 In (8.636 cm)
Package 1 Length	2.30 In (5.842 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	12
Package 2 Weight	7.44 Lb(US) (3.375 kg)
Package 2 Height	7.00 In (17.78 cm)
Package 2 width	5.80 In (14.732 cm)
Package 2 Length	7.00 In (17.78 cm)

Offer Sustainability

REACh Regulation	 REACh Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration

Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status : End of commerc. - Block

8910DP22V14 may be replaced by any of the following products:



8910DP32V14

Contactor, Definite Purpose, 30A, 2 pole, 24/24 VAC 50/60 Hz coil, open

Qty 1

Substitution date: |